


•

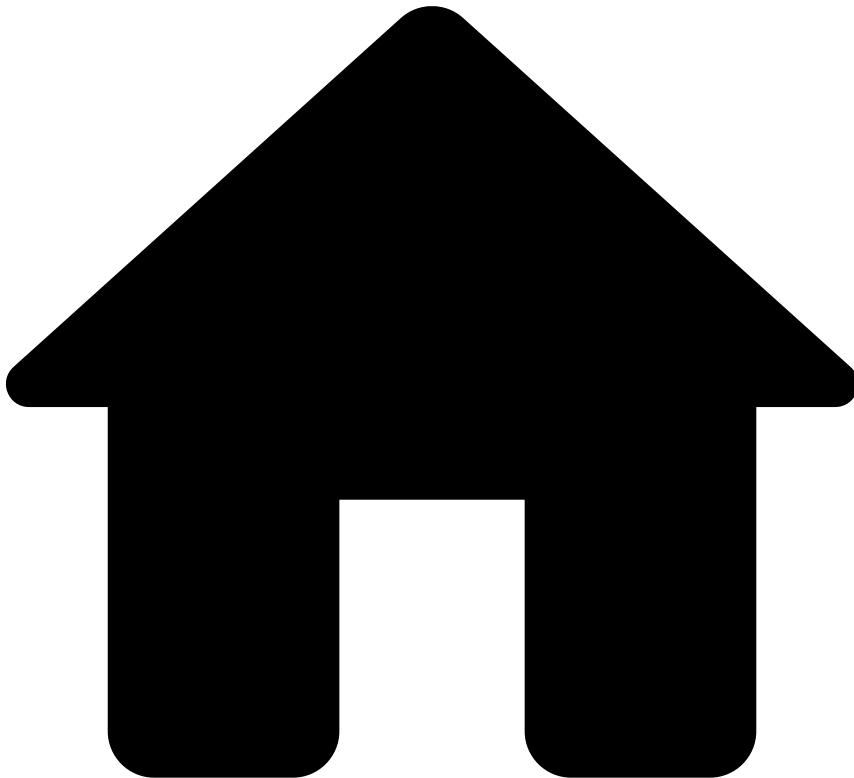

- [References](#)
- Digital Trust Enricher's UDFs

On this page

Digital Trust Enricher's UDFs

Was this page helpful?

The Digital Trust Enricher supplies out-of-the box User Defined Functions (UDFs) to ensure richer usage of Digital Trust data. The following sections describe the various UDFs and examples on how to use them.

User Defined Functions

Alert of type X exists

Description

The UDF parses the list of Digital Trust alerts and checks if there is an alert of a given type (not case sensitive). It returns `true` if there is an alert of a given type, `false` otherwise.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.

Response

Type	Description
Boolean	Returns true if there is an alert of the given type, false otherwise.

Example

```
Revelock.existsAlertOfType(event.revelock_alerts , 'Fraudster Behavior') ?? false
```

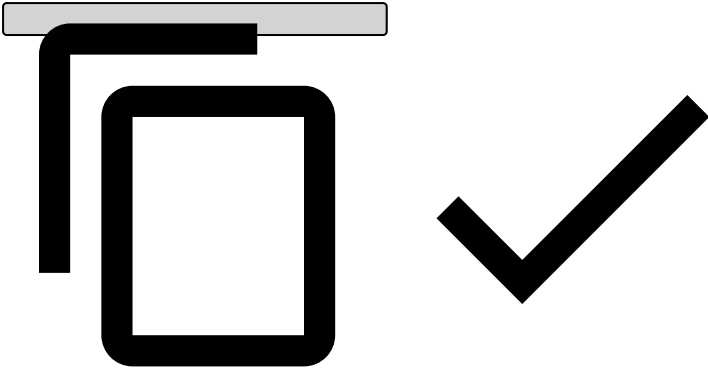

Get risk of alert of type X

Description

The UDF parses the list of Digital Trust alerts and gets the risk factor from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the highest risk is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.

Response

Type	Description
Double	Returns the highest risk value for the given alert type.

Example

```
Revelock.getRiskOfAlertType(event.revelock_alerts , 'Fraudster Behavior') ?? 0.0
```

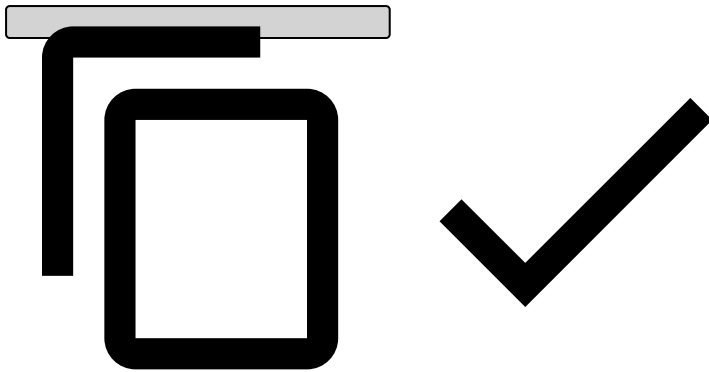

Get date of alert of type X

Description

The UDF parses the list of Digital Trust alerts and gets the risk factor from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the most recent alert date is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.

Response

Type	Description
Long	Returns the most recent alert date value for the alert type given. Null if none is found.

Example

```
Revelock.getDateOfAlertType(event.revelock_alerts , 'Fraudster Behavior') ?? 0
```

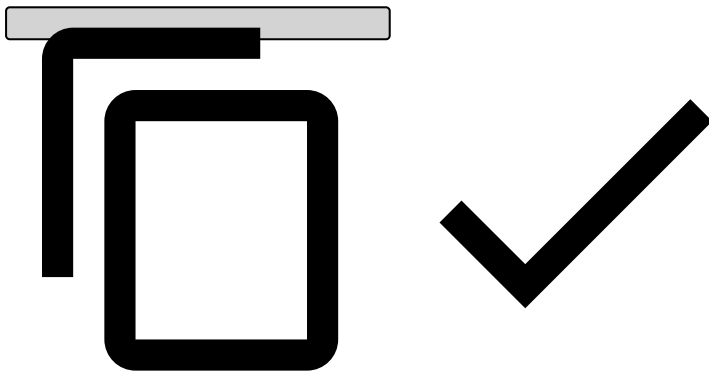

Exists view X of alert of type Y

Description

The UDF parses the list of Digital Trust alerts and checks if there is an alert of a given type for a given view (not case sensitive).

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.
view	String	The alert view to search for.

Response

Type	Description
Boolean	Returns true if there is an alert of a given type for a given view.

Example

```
Revelock.existsViewOfAlertType(event.revelock_alerts , 'Fraudster Behavior', 'account-details-view') ?? false
```

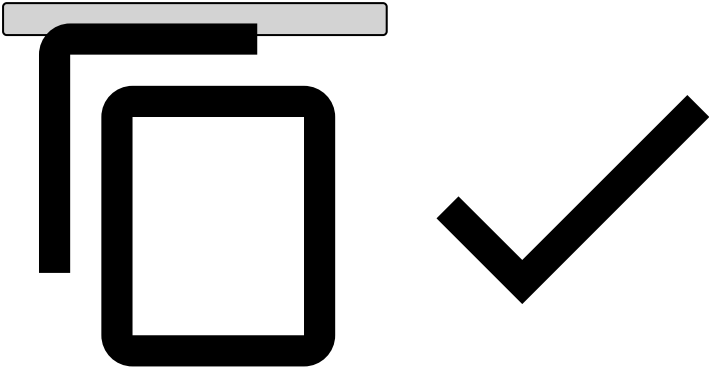

Get minimum double value of property X from alert of type Y

Description

The UDF parses the list of Digital Trust alerts and gets a property value from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the minimum value is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.
property	String	The alert property name.

Response

Type	Description
Double	Returns the smallest property value for the alert type given. Null if none is found.

Example

```
Revelock.getAlertOfTypeDoublePropertyMin(event.revelock_alerts , 'Fraudster Behavior', 'similarity') ?? 0.0
```

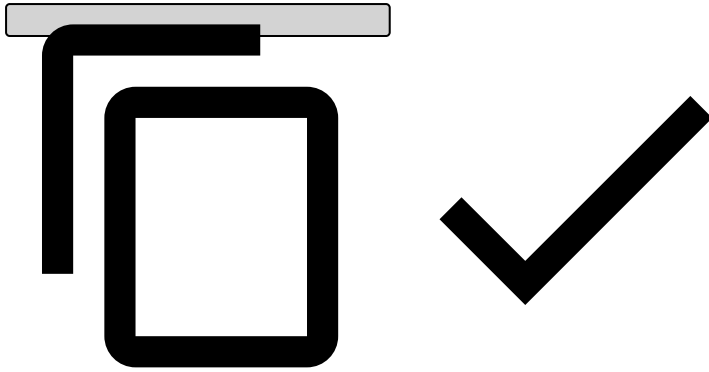

Get maximum double value of property X from alert of type Y

Description

The UDF parses the list of Digital Trust alerts and gets a property value from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the maximum value is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.
property	String	The alert property name.

Response

Type	Description
Double	Returns the biggest property value for the alert type given. Null if none is found.

Example

```
Revelock.getAlertOfPropertyDoubleMax(event.revelock_alerts , 'Fraudster Behavior', 'similarity') ?? 1.0
```

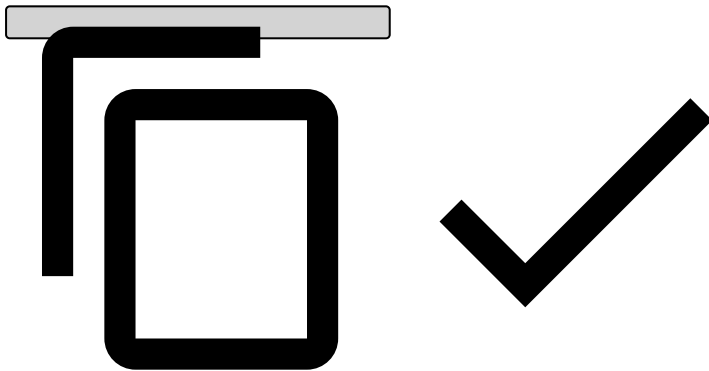

Get minimum long value of property X from alert of type Y

Description

The UDF parses the list of Digital Trust alerts and gets a property value from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the minimum is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.
property	String	The alert property name.

Response

Type	Description
Long	Returns smallest property value for the alert type given. Null if none is found.

Example

```
Revelock.getAlertOfPropertyLongPropertyMin(event.revelock_alerts , 'Fraudster Behavior', 'alert_date') ?? 0
```

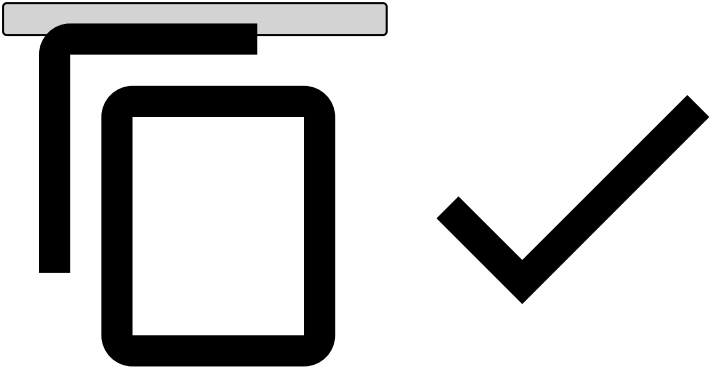

Get maximum double value of property X from alert of type Y

Description

The UDF parses the list of Digital Trust alerts and gets a property value from an alert of a given type (not case sensitive). If multiple alerts with the same type are found, the maximum is returned.

Parameters


Name	Type	Description
alerts	Object	The list of Digital Trust alerts.
alertType	String	The type of the alert to search for.
property	String	The alert property name.

Response

Type	Description
Long	Returns biggest property value for the alert type given. Null if none is found.

Example

```
Revelock.getAlertOfPropertyLongPropertyMax(event.revelock_alerts , 'Fraudster Behavior', 'alert_date') ?? 0
```

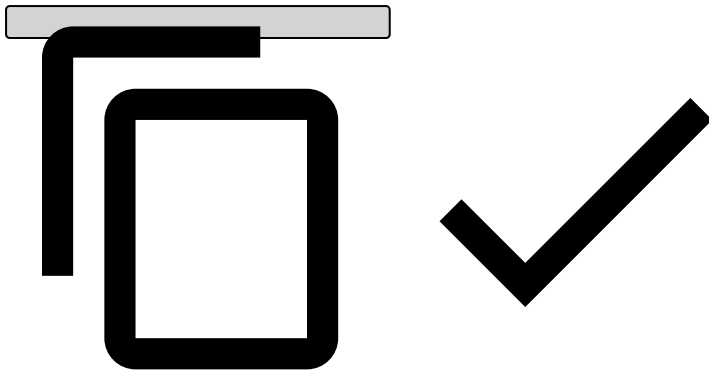

Property X with value Y of alert of type Z exists

Description

The UDF parses the list of Digital Trust alerts and gets a property value from an alert of a given type (not case sensitive). Then, it checks if that property value is the same as the value given by the `propertyValue` parameter.

Parameters

Name	Type	Description
<code>alerts</code>	Object	The list of Digital Trust alerts.
<code>alertType</code>	String	The type of the alert to search for.
<code>property</code>	String	The alert property name.
<code>propertyValue</code>	String	The alert property value to compare.

Response

Type	Description
Boolean	Returns <code>true</code> if there is an alert both with a given type and property value.

Example

```
Revelock.existsAlertOfTypeAndPropertyValue(event.revelock_alerts , 'Fraudster Behavior', 'family_name', 'fraud') ?? false
```

