


-

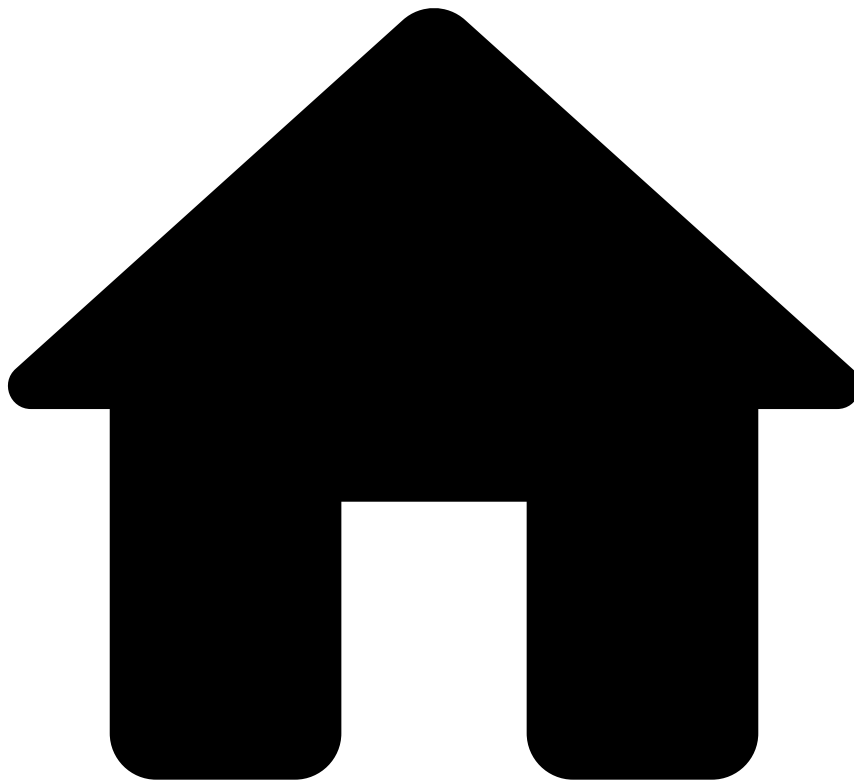

- [References](#)
- [Rules Projects](#)
- Cards - Decision Rules

On this page

Cards - Decision Rules

Was this page helpful? 

Description

Decision Rules are triggered based on the score value produced by a machine learning model. If your application workflow does not have a model, the `fraud_score` field remains empty, and thus rules inside the *Decision Rules* project are not triggered.

Rules Project Metadata

- *Target Variable*: decision
- *Tenancy Type*: SINGLE_TENANT

Rules in this rules project:

Cards-DR1

Comment

Declines a transaction if it scored above a set threshold.

Actions

- [Cards-DR1]

Variables

```
HIGH_SCORE_THRESHOLD = cards__rules_thresholds["model_high_score"].threshold;  
  
score = event.fraud_score * 1000;
```

Condition

```
(score ?? 0) >= HIGH_SCORE_THRESHOLD
```

Explanation

[Cards-DR1] - Decline - Model score ({{localvar.score}}) was above the threshold ({{localvar.HIGH_SCORE_THRESHOLD}}).

Mark As

The outcome of this rule is: **decline**