

•



- [Operational Work](#)
- [Data Scientist & Fraud Strategist](#)
- [Work with Rules](#)
- Send Test Transactions via API


On this page

Send Test Transactions Via API

Was this page helpful? 

Learn how to send test transactions via API to test your rules with a default Cards velocity rule from Fraud rules project.

Sending requests

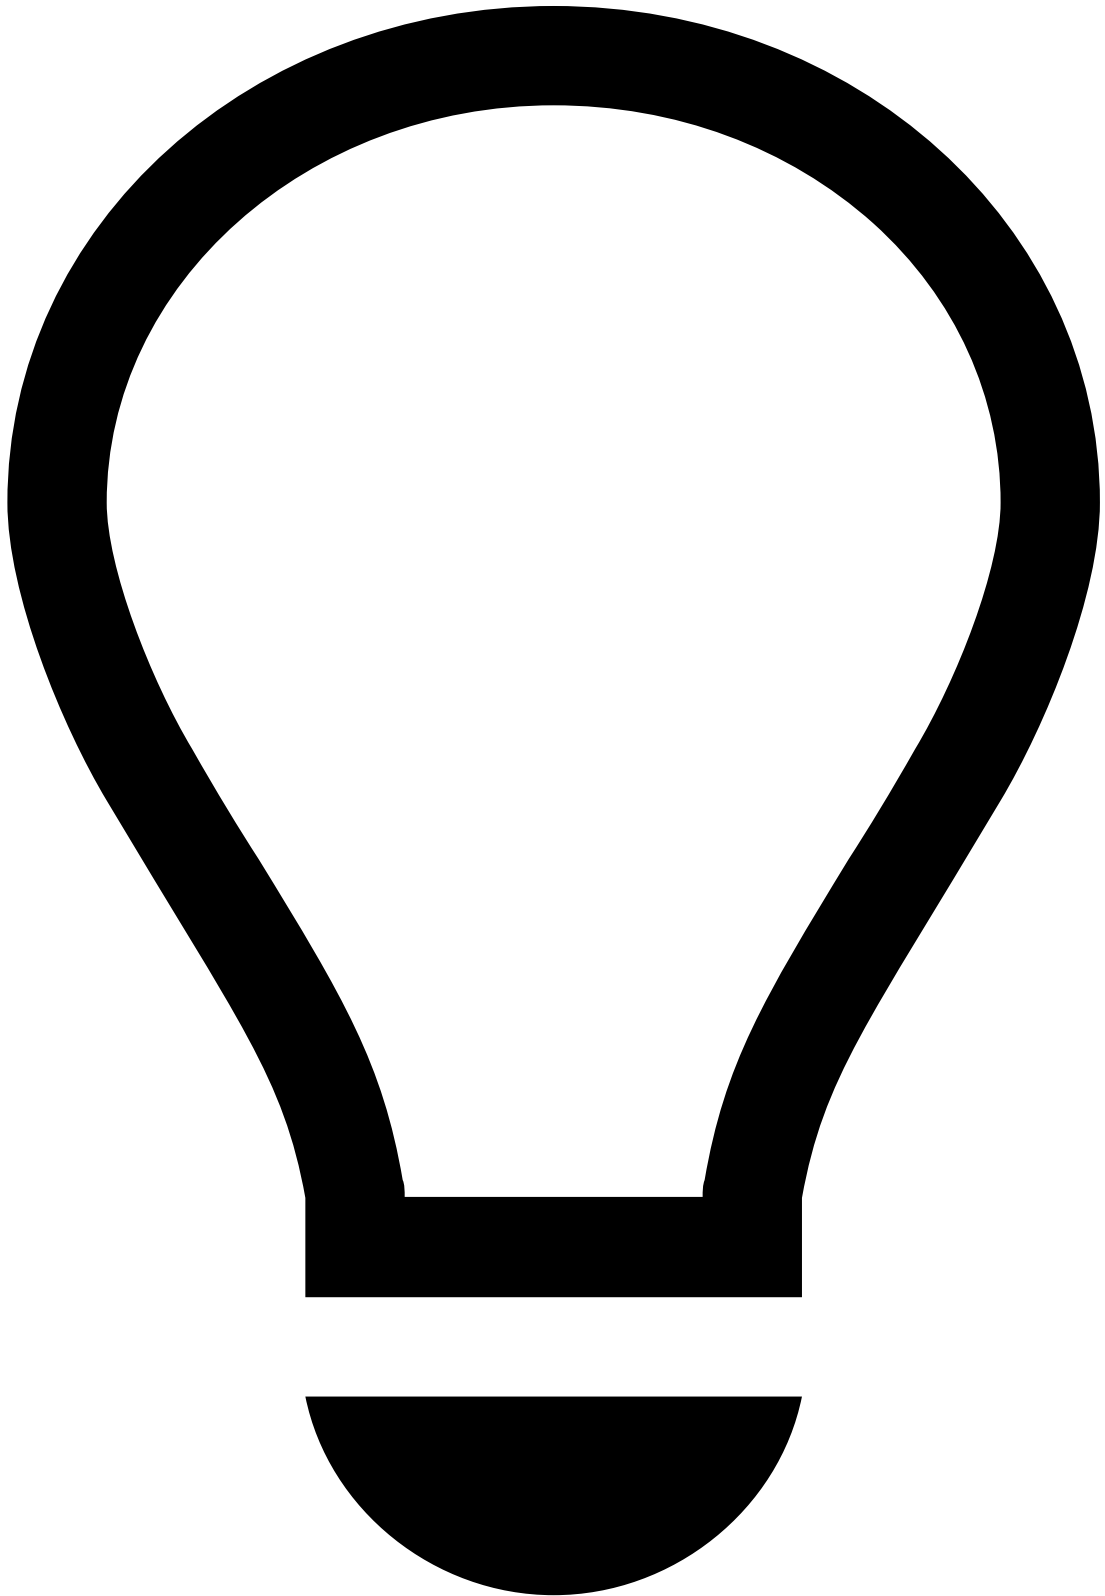

tip

Tooling: [Postman](#) is an open source tool recommended to send test transactions via API.

Testing a rule via API using Postman assumes a [JWKS and subsequent JWT](#) have been generated, and requires the following:

1. Understand which environment and endpoint you want to submit the request to.
2. Create a payload including the fields that you want to test and the mandatory fields required by the endpoint.

3. Confirm that the sequence of test transactions that you would expect to trigger a rule is successful.

Choose the endpoint


To test a rule, you can send a POST request to the [Authorization endpoint](#). Each endpoint has recommended and mandatory fields. Make sure you use a payload with all the necessary fields. You can check the API Reference section to learn more about API fields.

Create a payload

As an example, consider that you want to trigger the rule *Cards-Velocity-4: Number of transactions performed by card in the last 3 minutes exceeds threshold*, with a threshold equal to five transactions. Check the [Rules](#) page for more information about rule Cards-Velocity-4.

You can trigger this rule by sending five POST requests within three minutes using the following payload:



```
{
  "event_occurred_at": {{nowTimestamp}},
  "lifecycle_id": "{{nowTimestamp}}",
  "card_pan": "fdz_testing_rules_1",
  "card_id": "fdz_testing_rules_1",
  "amount": 1,
  "cardholder_bill_amount": 10,
  "mti": "mti",
  "ttc": "ttc",
  "currency_code": "usd",
  "pos_card_read_method": "pos_card_read_method",
  "mcc": "MCC",
  "acceptor_id": "12",
  "action_code": "01",
  "account_iban": "ex1",
  "customer_id": "fdz_testing_rules_1",
  "card_presence_flag": false,
  "acceptor_country_code": "US",
  "acceptor_zip": "test1234",
  "card_bin": "test1234"
}
```

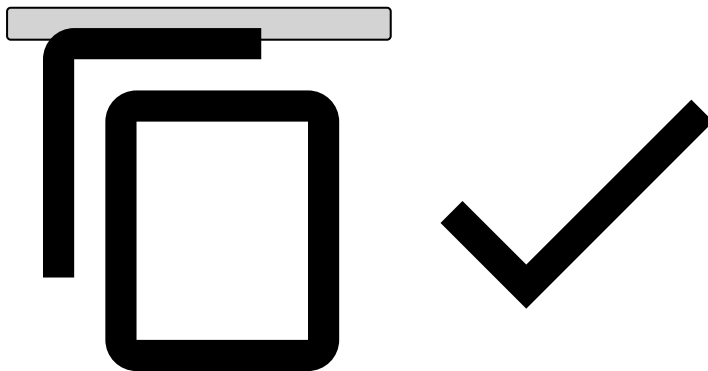


Remember that the `event_occurred_at` field is the current timestamp. You can set an [environment variable](#) to generate this timestamp using the following pre-request script:

Pre-request script to generate current timestamp automatically


```
// The Date.now() method returns the number of milliseconds elapsed since January 1, 1970
00:00:00 UTC.
pm.environment.set("nowTimestamp", Date.now());
```

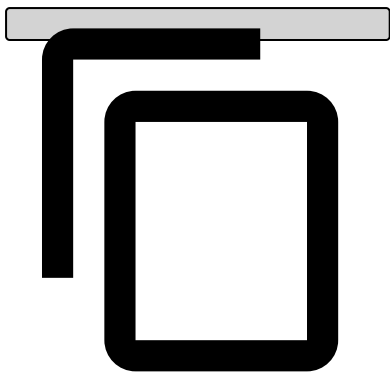

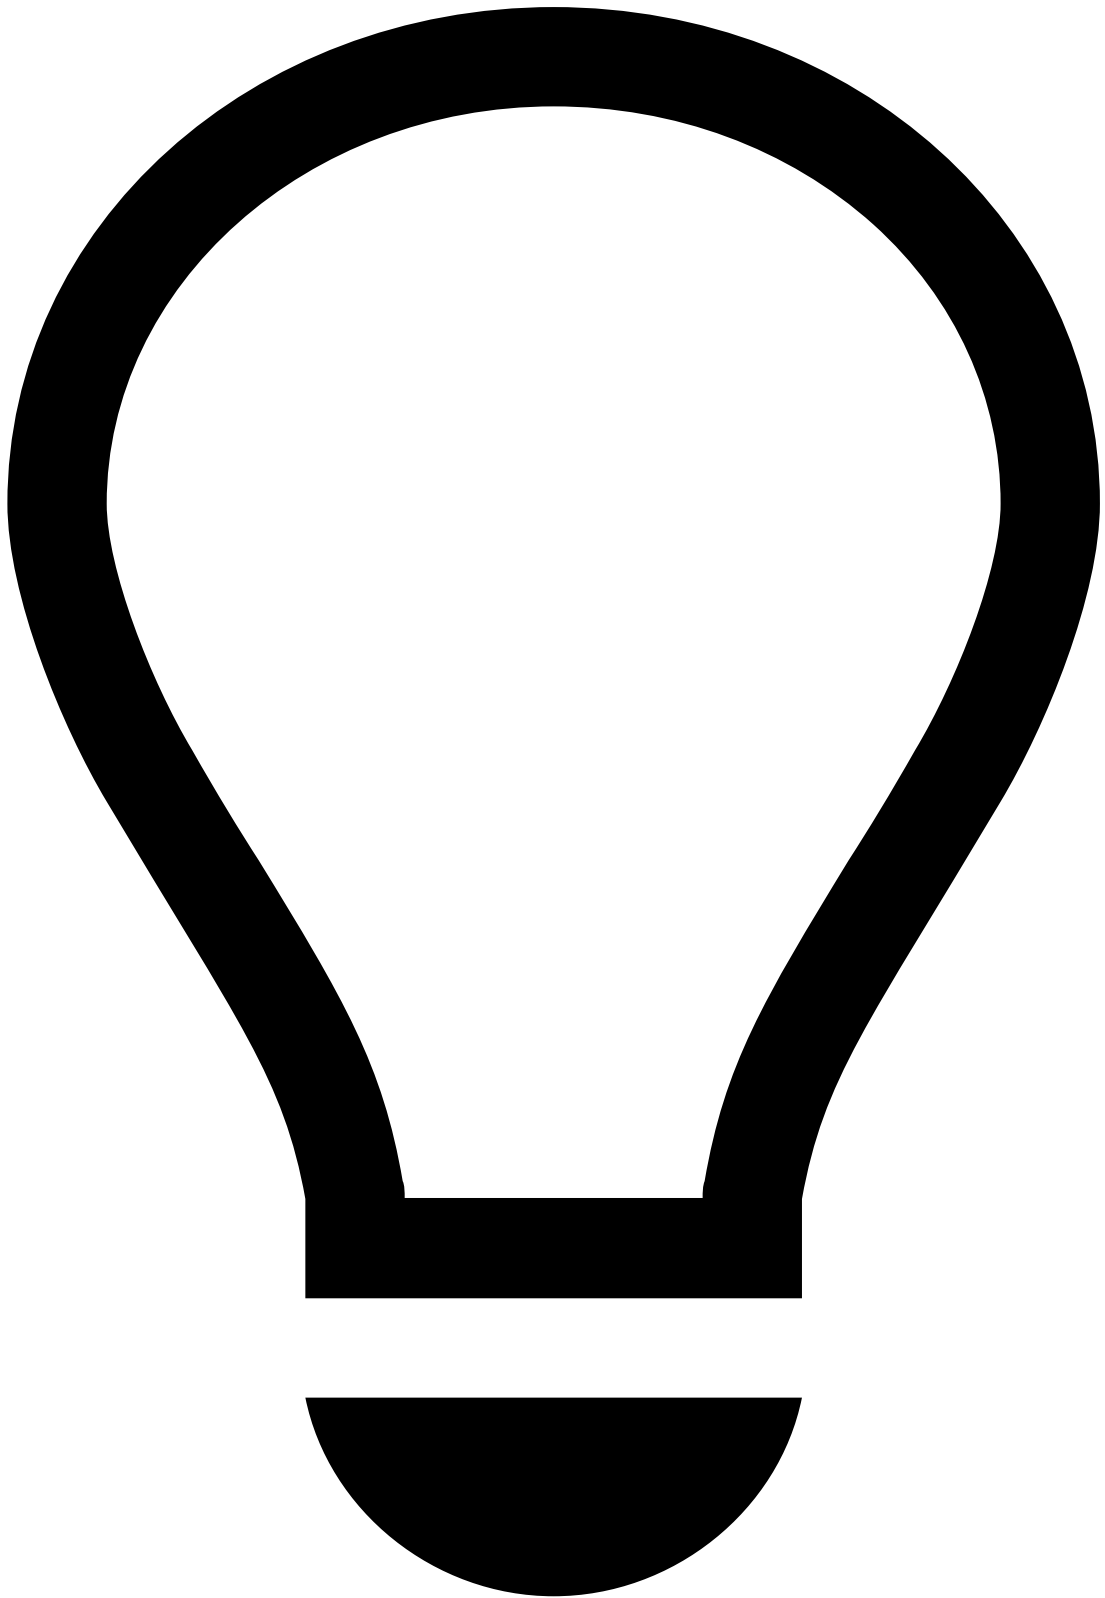

tip

Lifecycle id: The `lifecycle_id` field should be different for each request that you submit. If you have an environment variable for `event_occurred_at`, you can use this variable in the `lifecycle_id` field to avoid manual change each time you submit a new request.

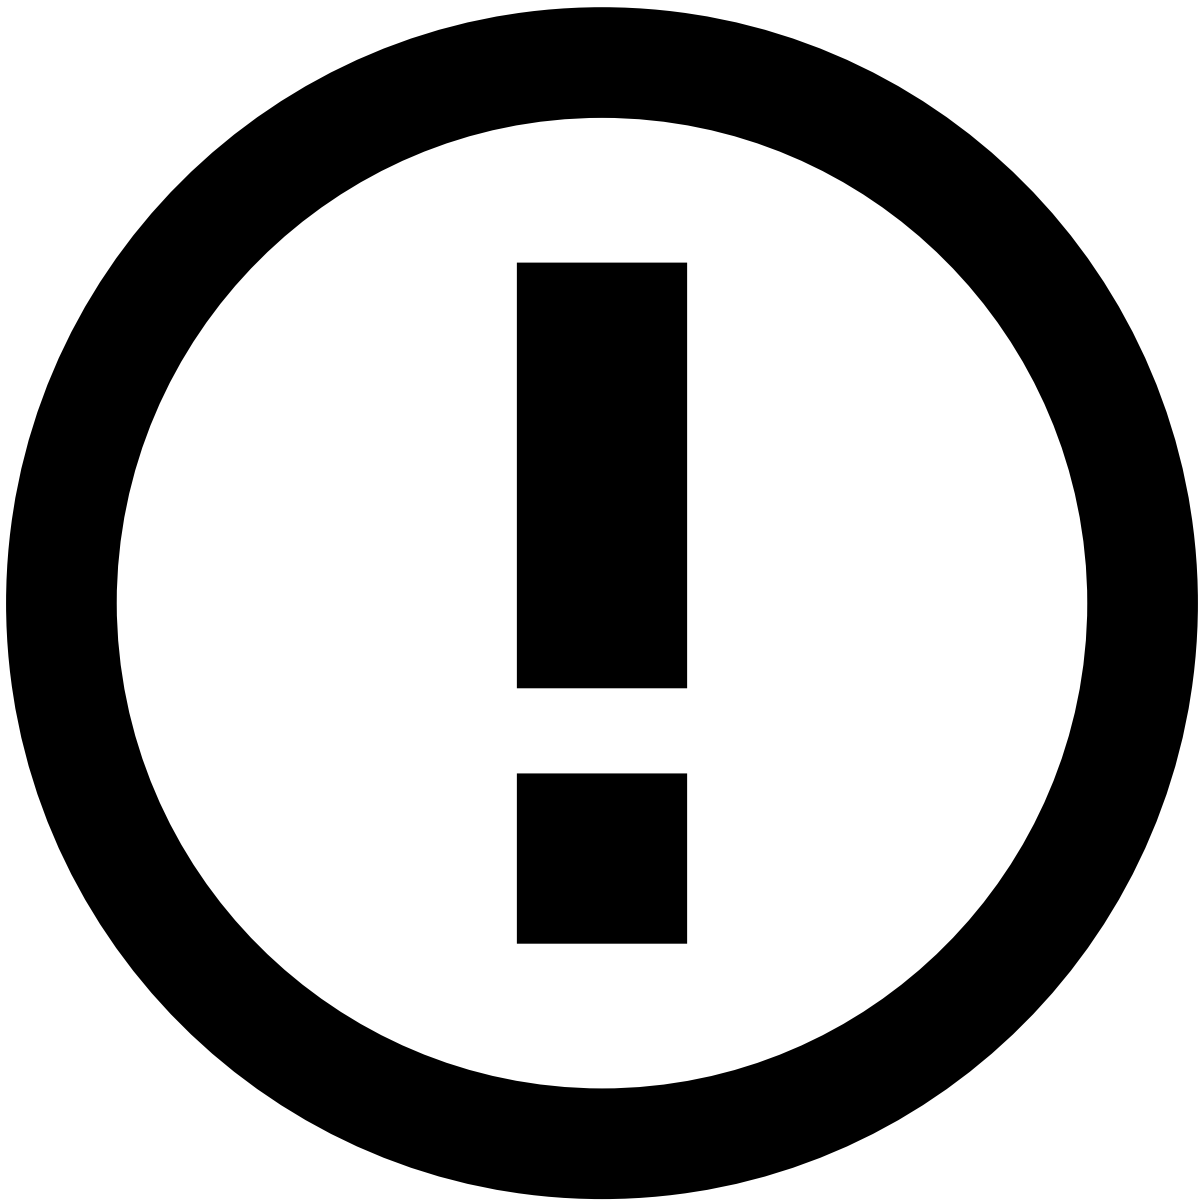

info

First Request: The first POST request after publishing your application might take longer (approximately one minute) than subsequent requests.


Check the API response🔗📄

Response - rules not triggered🔗📄

The first four POST requests with the payload provided in the previous section should not trigger the rule Cards-Velocity-4 because the number of test transactions is below the threshold. The API response should have the `decision` field as `approve` :

```
{
  "lifecycle_id": "12012018194035",
  "decision": "approve",
  "score": 0,
  "action_codes": [],
```


```
"secondary_action_codes": [],  
"alert": false,  
"status": "ok"  
}
```

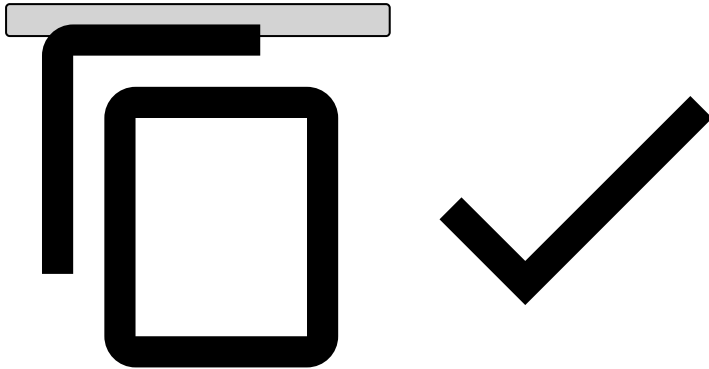


Response - rules triggered✅

When fifth request with the same card ID is submitted within the threshold (i.e. 3 minutes), the API response should have the `decision` field as `decline` :

```
{  
  "lifecycle_id": "12012018194148",  
  "decision": "decline",  
  "score": 0,  
  "action_codes": [  
    "Limit/Review Card",  
    "[Cards-Velocity-4]"  
  ],  
  "secondary_action_codes": [],  
  "alert": true,  
  "status": "ok"  
}
```

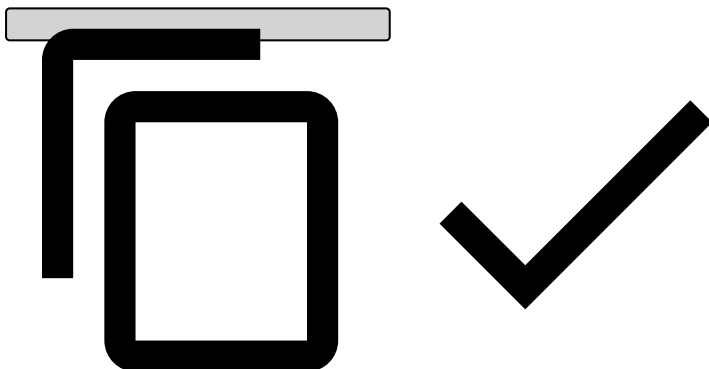

- `action_codes` : Populated with the actions of the first triggered rule, other than the alert action. In this example, the actions include:
 - List the card to be reviewed.
 - The name of the rule that was triggered for debugging purposes.
- `secondary_action_codes` : Populated with actions of every other triggered rule (i.e. excluding the first triggered rule), other than the alert action. In this example, only the first rule was triggered.

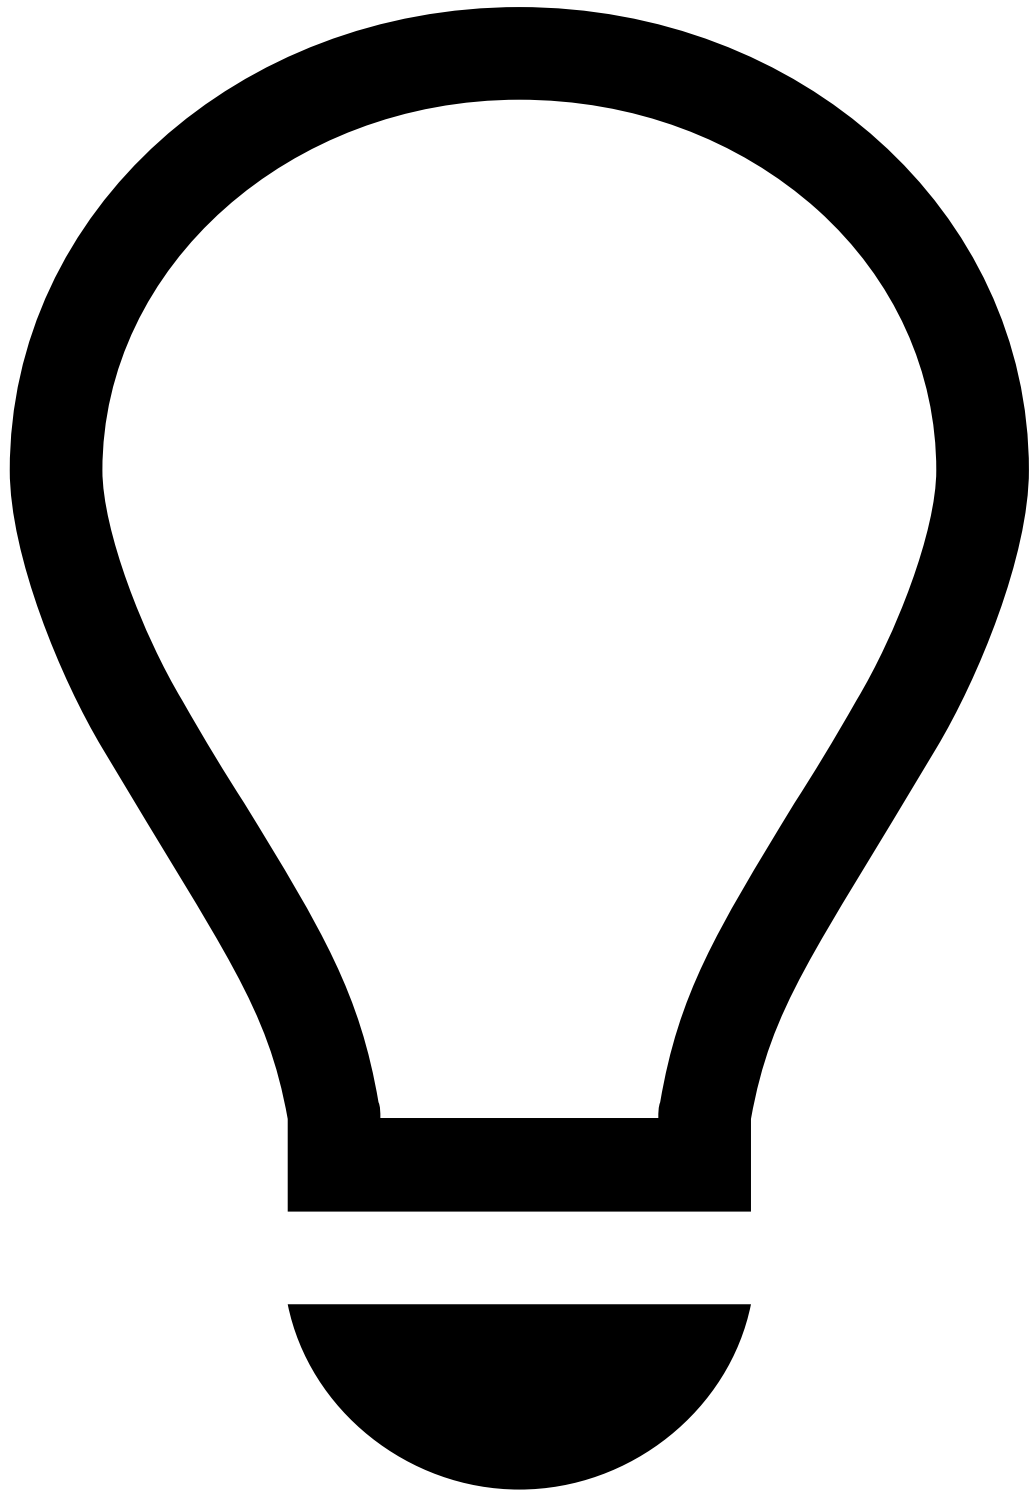

tip

Secondary action codes and decision: The decision is set only by the first rule that is triggered as explained in the [Rules Precedence](#) section of the Rules Projects page.

- `alert` : In this example, the alert is displayed as `true` , and therefore, the event is sent to Case Manager.

Next steps📖

Now that you have triggered rule *Cards-Velocity-4* as a test, learn how to confirm:

- The [response via Pulse](#): Check if the list transition was successful.
- The [response via Case Manager](#): Check if the event is displayed in Case Manager.