


-

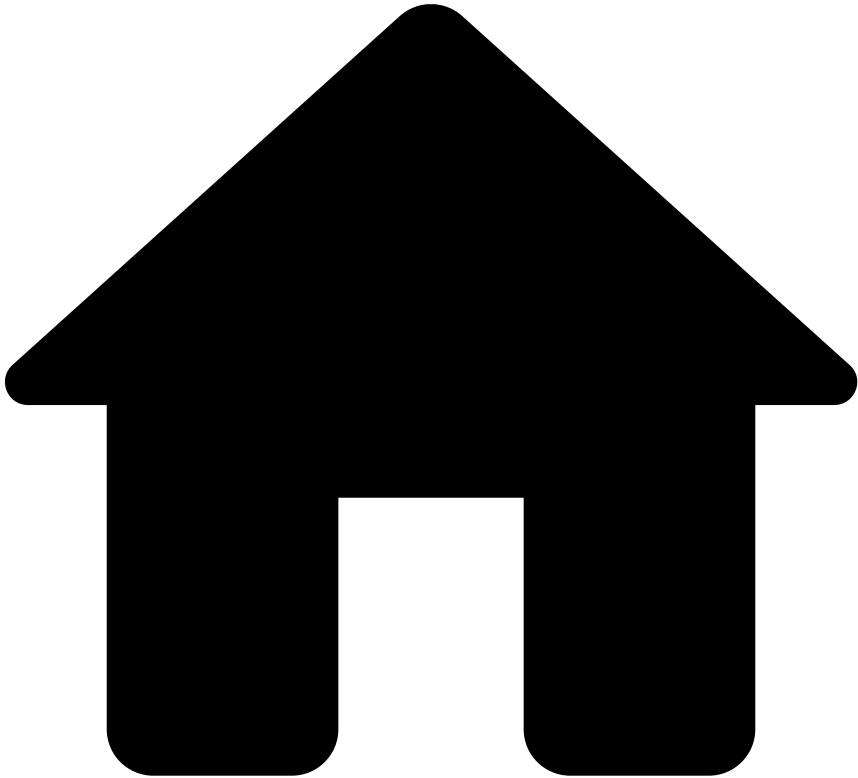

- Securing an Application
- Creating and Using Groups

On this page

Was this page helpful? 

Creating and Using Groups

When Pulse users create a resource (rules project, plan, model project, data source, etc.) they can decide to make it visible only to certain groups.

For example, if a rules project is restricted to be visible only to a group, users of that group can view and edit that rules project if they have a role that allows them to view and edit rules projects.

The following sections explain how to create a group, how to add members to it, and how to set the visibility of a resource.

Creating groups¹

To create a new group, complete the following steps:

1. Select the button in the menu bar to navigate to the **Administration** page.
2. Open the **Security** tab.
3. In the **Groups** section, select *Hierarchical Groups*.
4. In the group tree, select the add child button to add a child group to an existing group.
5. Enter a **Name** for the group.
6. In the **Group Properties** field, you can add properties to the group in the form of key-value pairs.

Adding users to a group²

To add a user to a group, complete the following steps:

1. Select the button in the menu bar to navigate to the **Administration** page.
2. Open the **Security** tab.
3. In the **Users** section, select the user.
4. In the **Groups** field, add the group.
5. **Save** the user.

Using groups to limit visibility³

To limit the visibility of a resource, complete the following steps:

1. Open the resource and use the button to edit the visibility options.
2. In the Visibility area, select the **Specific Groups** option.
3. Select the groups to which the resource should be visible.
4. For each group, select the actions (*Read*, *Update*, *Delete*) that can be performed on the resource.

Note that users will be able to perform the selected actions only if an administrator assigned them a role that allows performing that action.

Example⁴

Consider the following scenario.

- Kate and John belong to the *data-scientist* group.
- John has a role that grants him Read permissions on model projects, but doesn't have any role with the *Update* permission.
- Kate creates a model project and sets it visible to the *data-scientists* group, allowing group members to use their *Read* and *Update* permissions.

In this case, John can see the model project, but he cannot update or delete it.