


-

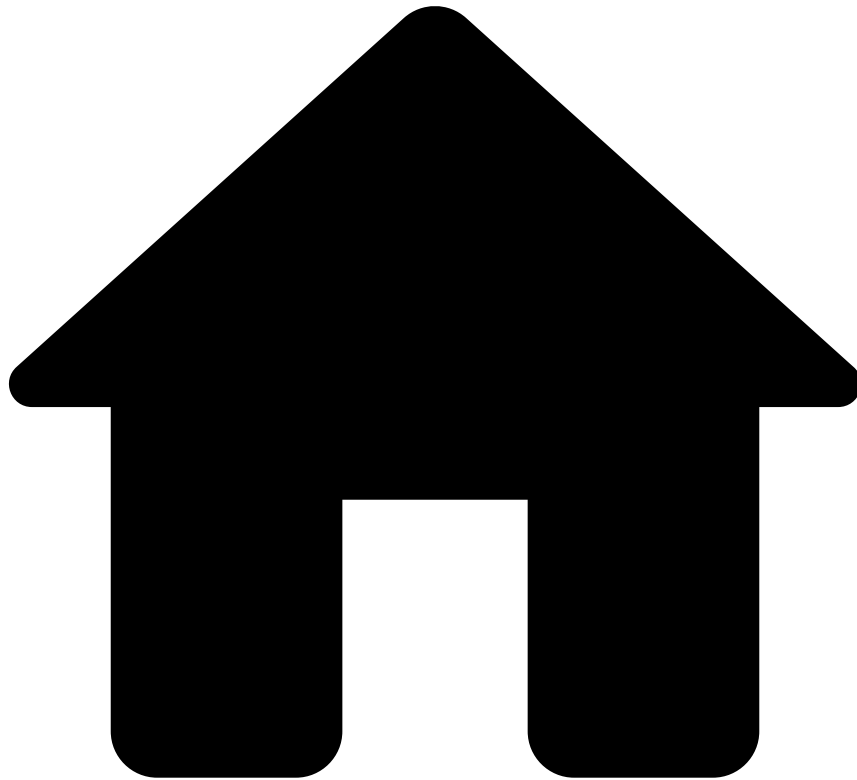

- [Component Encryption](#)
- Troubleshooting Tips

Was this page helpful? 

Troubleshooting Tips

Configuring custom properties can be challenging due to the number of different configurations that are required to fully set up [component encryption](#).

Here are some tips if you run into issues:

1. Ensure you're using the right software versions, as the most common source of errors is the usage of incorrect software versions. Ensure the following minimum versions are in use:
 - **Java:** 8u141
 - **Rabbit:** 3.6.14 / Erlang 20.1

2. Check for errors in the Pulse logs. The most common configuration errors which are easily identified in the logs are:
 - The client side is configured without encryption and the server side is configured with encryption (or vice-versa).
 - The public key of the certificate in the client truststore does not match the private key of the server keystore.
 - The truststore does not include the certificate of the CA that signs it.
3. Check if the server is configured with SSL by using `openssl s_client -connect <server:port>` and verify if the certificates are displayed in the command output.
4. Set the encryption lib log level to trace by adding `<logger name="com.feedzai.ssl" level="trace"/>` to `logger.xml`. If the logs are significantly longer than expected, it might be a sign that too many SSL connections are being established.



info

Establishing too many SSL connections might have an impact on performance.

5. Under extreme circumstances, run the following command: `set -Djavax.net.debug=all`. This should be used with caution because it produces a long log. Check the following page to understand the generated logs: <https://docs.oracle.com/javase/8/docs/technotes/guides/security/jsse/ReadDebug.html>.