

•



- Project Organization
- [Monitoring](#)
- [Logging](#)
- Event Storage Dump Logging

On this page

Event Storage Dump Logging

Was this page helpful? 


Event Storage Dump Logging

In case of a major failure, the Smart Event Storage Dump will log the event that failed to be persisted in the file. This event can contain confidential information, therefore, these logs should only be logged to the [Confidential Logger](#). In order to do that the following configurations must be added to the `logger.xml` :

To the "common" logger:

Main Log Appender

```
<logger name="com.feedzai.dump.storage.impl.files.FileDumpWriter" level="off"/>
```

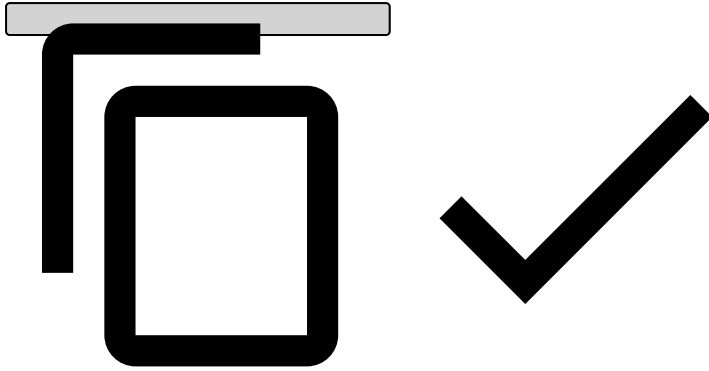

To the confidential logger:

Confidential Log Appender

```
<!-- In trace level it will log the events that failed to be persisted into disk -->  
<logger name="com.feedzai.dump.storage.impl.files.FileDumpWriter" level="off" additivity="false">  
  <appender-ref ref="CONFIDENTIAL-ASYNC"/>  
</logger>
```

