


•

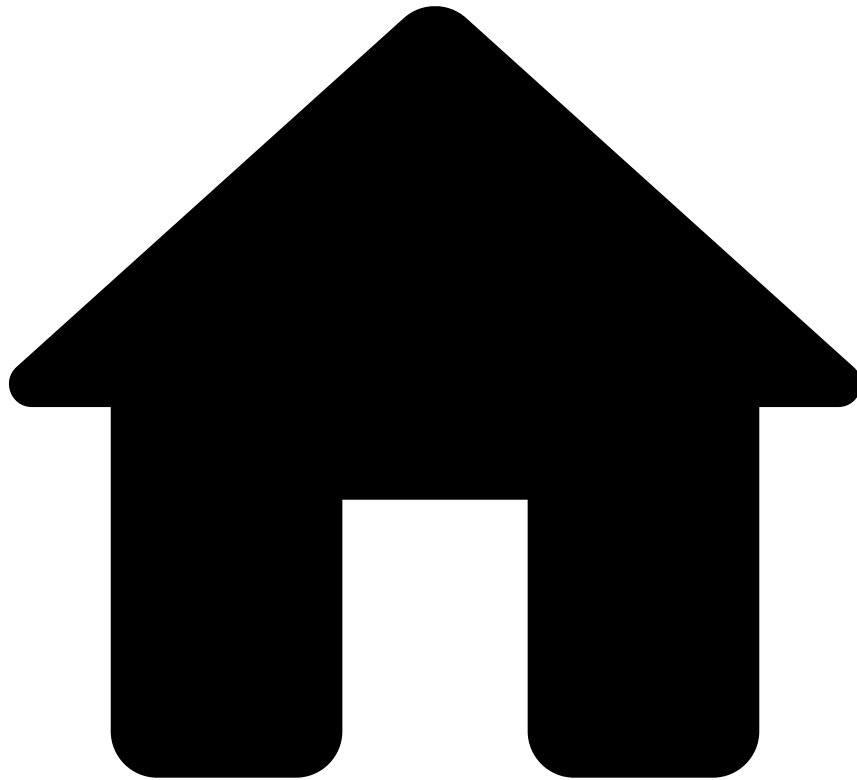

- Project Organization
- [Monitoring](#)
- [Monitoring Metrics](#)
- Monitoring the Persistence of Events in the Workflow

On this page

Monitoring the Persistence of Events in the Workflow

Was this page helpful? 

When your Application is published with one or more workflows executing, there are various storages to which events' data can be persisted.

The following sections detail the metrics available for each one of them.


Workflow Event Storage

Each Workflow has 1 connector to the event storage (either to a relational or Cassandra database), used for storing events near the end of processing and to recover via replay.

Name	Description	Unit	Tags
Counters			
pulse.workflow.eventstorage.eventsQueuedSize	The number of events pending in-memory to be persisted to the storage.	#	workflowID appSlug metricType appType

Example of live metrics

```
"pulse.workflow.eventstorage.eventsQueuedSize,appSlug=nank,metricType=APPLICATION,appType=PULSE_APPLICATION,workflowID=pBqsDBqu114nuQhbTKLPjw":{
  "value":92
}
```

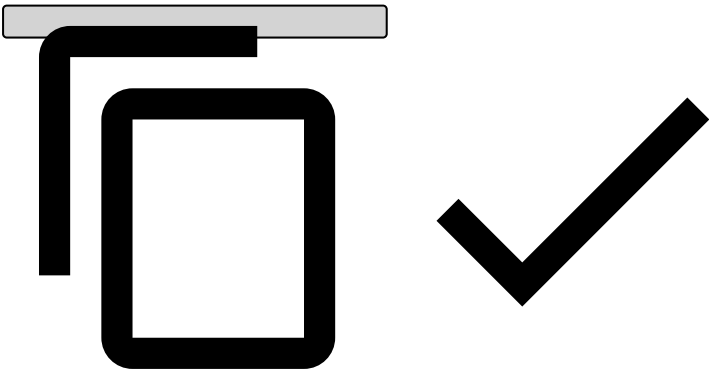

Self Service Rules Testing Event Storage

In this case, there is 1 connector to an SSR Event Storage for each Rules Element in the workflow that is running a snapshot for simple rules.

Name	Description	Unit	Tags
Counters			
pulse.workflow.rules.selfServiceRulesTestingStorage.eventsQueuedSize	The number of events pending in-memory to be persisted to the storage.	#	workflowID workflowElementID appSlug metricType appType

Example of live metrics

```
"pulse.workflow.rules.selfServiceRulesTestingStorage.eventsQueuedSize,elementId=1f8204a3-43d0-4031-9783-fa0200939522,appSlug=bank,metricType=APPLICATION,appType=PULSE_APPLICATION,workflowDesc=payments,workflowId=pBqsDBqu114nuQhbTKLPjw,elementDesc=BlackRules":{
  "value":32
}
```

