

•




- Project Organization
- [Monitoring](#)
- Monitoring Metrics

Monitoring Metrics

Was this page helpful? 

Pulse and App Engine instances collect monitoring metrics in different components that are then exposed through the `/metrics` endpoint. This endpoint has a default timeout of 1 second when retrieving the metrics from the App Engines. However, it's possible to use a timeout parameter to override this default. For example, calling `/metrics?timeout=3` will wait 3 seconds at most for metrics from the App Engines.

To give more visibility about these metrics to Pulse's operators, this section will hold pages describing these metrics.

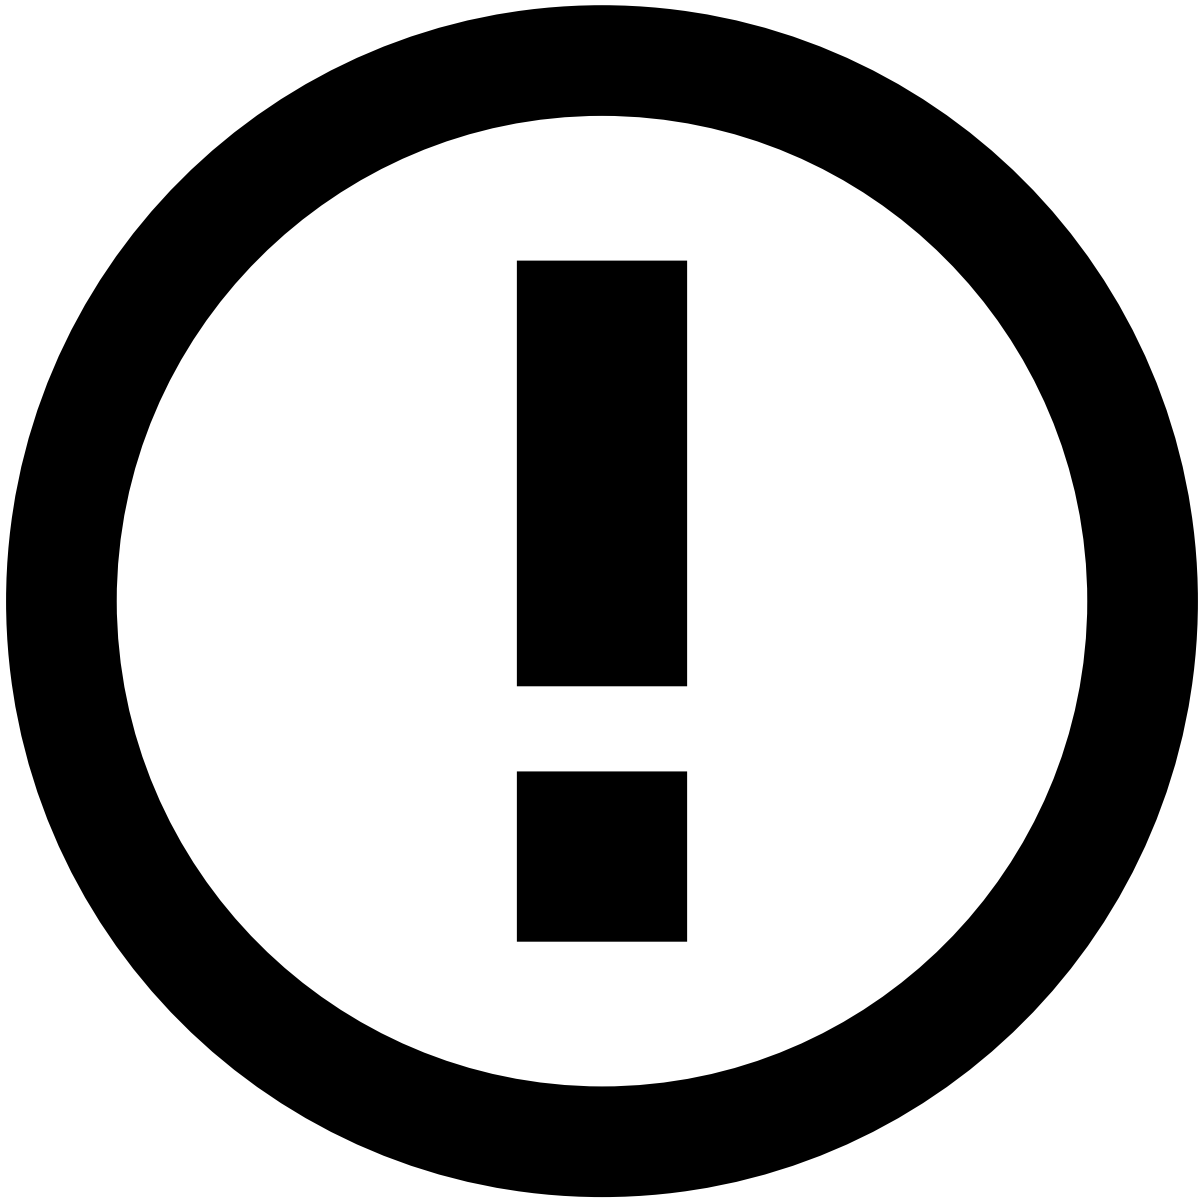

Metrics Self Documentation

Even when not described in this section, all metrics have a short description and other information which can be obtained at the `/metrics/rich` endpoint.

This section will start presenting information about monitoring metrics related to PKernel but will be iteratively incremented with new information related to other components of the product.

- [Monitoring Processing of Profiles in PKernel](#) â Learn about PKernel monitoring metrics.
- [Monitoring Replication of Events in the Workflow](#) â Learn about metrics to monitor the replication of events in the workflow.
- [Monitoring the Persistence of Events in the Workflow](#) â Learn about metrics to monitor the persistence of event data.
- [Monitoring Cassandra Driver Sessions](#) â Learn about Cassandra driver sessions monitoring metrics.
- [Monitoring Processing of Feedback Records in Pulse](#)
- [Monitoring Event Storage Dumps in Pulse](#)
- [Monitoring DynamoDB Profile Store](#) â Learn about metrics to monitor the DynamoDB profile store.