

The process stack

After the material stack and opening are built, the process stack transforms the profile step by step — the same idea as real fab steps (deposit, fill, etch, polish).




How it works

Steps run **in order, top to bottom** (①, then ②, ③ ...). Each step acts on the result of the one above it. A **Repeat** block runs its steps $\times N$ — handy for multilayers / superlattices.

The step types

- **Deposit · conformal** — coats every surface (walls, bottom, top) with a uniform layer that follows the profile. Use it for liners and spacers.
- **Deposit · planar** — adds a flat layer on top only (no sidewall coverage).
- **Fill** — fills the opening / voids with a material (gap-fill), then continues above the surface.
- **Etch · isotropic** — removes material equally in all directions; rounds corners and undercuts.
- **Etch · anisotropic** — removes material vertically. Anisotropy 1 = fully vertical, 0 = isotropic, in between = a rounded undercut. Pick a material to etch only that one, or “(any)”.
- **Planarize** — cuts everything flat at a height, like chemical-mechanical polish (CMP).

Worked example — liner + fill + polish

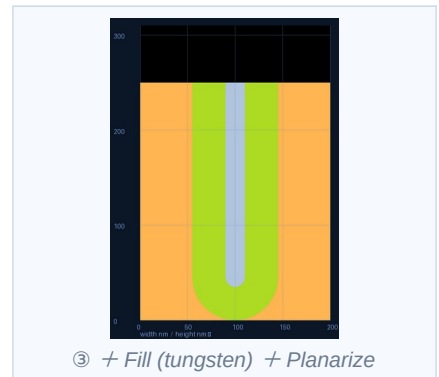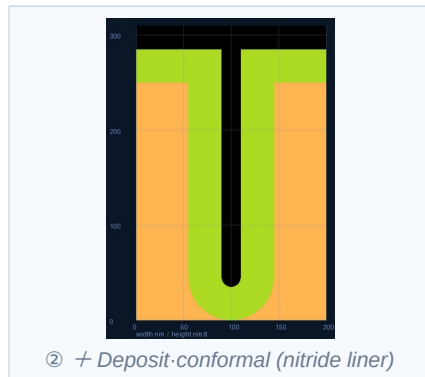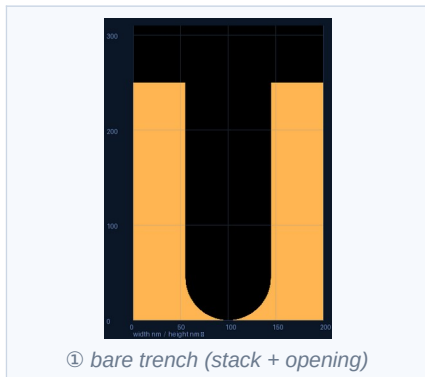

Tips

- The material dropdown on Deposit / Fill / Etch lists only materials already in your stack (Etch adds “(any)”).
- Etch with a material selected removes only that material; “(any)” removes whatever it reaches.
- Build a superlattice with a Repeat block: e.g. deposit A, deposit B, repeated $\times 10$.