

C1 implements I1, I2

Program Code:

```
package core_java;

interface Mobile {
    String NAME = "IQ NEO 10";
    void Name();
}

interface Laptop {
    String name = "Victus HP";
    void name();
}

class Devices implements Mobile, Laptop {
    void tab() {
        System.out.println("I use tab");
    }

    public void Name() {
        System.out.println("Mobile: " + Mobile.NAME);
    }

    public void name() {
        System.out.println("Laptop: " + Laptop.name);
    }
}

public class Display {
    public static void main(String[] args) {
        Devices d = new Devices();
        d.tab();
        d.Name();
        d.name();
    }
}
```

Explanation:

This program demonstrates multiple interface implementation. The Devices class implements both the Mobile and Laptop interfaces. Therefore, it provides implementations for the methods Name() and name(). The program creates a Devices object and displays information about the tab, mobile, and laptop.


Compilation and Execution Commands:

Save the file as: Display.java

Compile:
javac -d . Display.java

Run:
java core_java.Display

Output Screenshot:

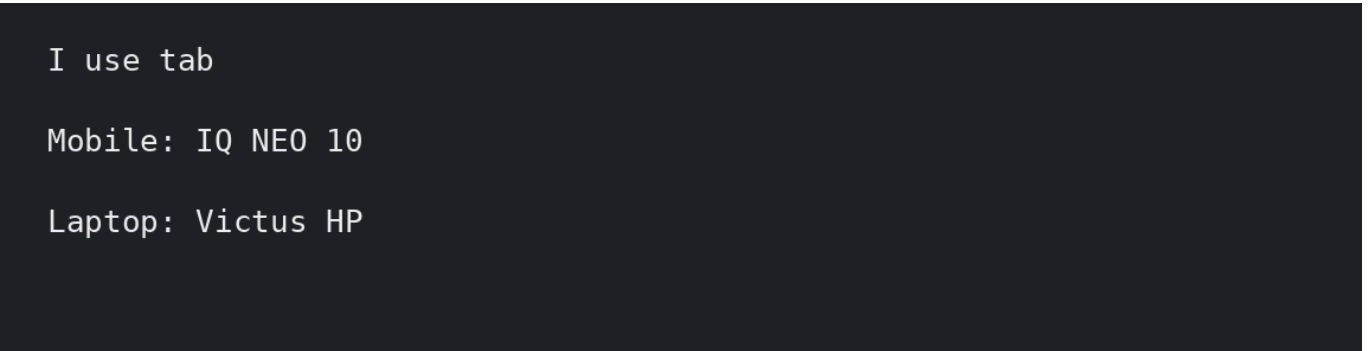

```
I use tab

Mobile: IQ NEO 10

Laptop: Victus HP
```

Verification:

The output confirms that the Devices class successfully implements methods from both Mobile and Laptop interfaces and also executes its own tab() method.

Result:

Thus, the Java program was successfully executed and the relationship C1 implements I1, I2 was verified successfully.