C-program

```
#include <stdio.h>
#include <math.h>
int main()
{
float P,T,R,SI,CI;
printf("Enter principal amount,Time, Rate");
scanf("%f %f %f", &P&T&R);
SI=(P*T*R)100;
CI=P*Pow(1-R/100)T)-P;
print("The SI is %f", SI);
printf("The CI is %f", CI);
return 0;
}
```

Output

Enter principal amount, Time, Rate: 1000 *2*2 S

The SI is 50

The CI is 50.675

program #2: WAP to illustrate getch(), getche() and getchar()

program analysis:

The functions getch(), getche(), getchar() reads a single character from the console. The function getch() & getche() needs control in the outdated programs. Modern programming languages & compile support doesnot require consult.

Algorithm

Step1: start

Step2: read a character

Step 3: Display a character

Step 4: stop

Flowchart.

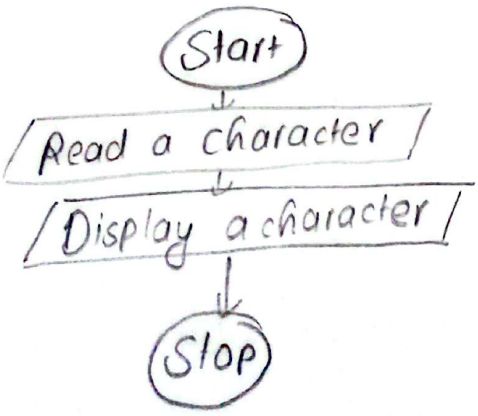

C program

-getch()

```
#include <stdio.h>
#include <conio.h>
int main()
{
char ch
printf("Enter a character");
ch=getch();
printf("char= %c", ch);
return 0;
}
```

Output

Enter a character char=A

-getche()

```
#include <stdio.h>
#include <conio.h>
int main()
{
char ch
printf("Enter character");
ch=getche();
printf("char= %c", ch);
return 0;
}
```

Output

Enter character A char=A

-getchar()

```
#include <stdio.h>
int main()
{
char ch;
printf("Enter character:\n");
ch= getchar();
printf("char= %c", ch);
return 0;
}
```

Output

Enter character: HELLO

char=H

Result: The use of getch(), getche(), getchar() was illustrate.

Program #3: WAP to illustrate putch() and putchar()

problem analysis

In C programming putchar() and putch() both output a single character to the screen. putschar is define in consio.h

Algorithm

Step1: start

Step2: Read or define a character

Step3: display output using putch() and putchar()

Step4: Stop

CamScanner

flowchart

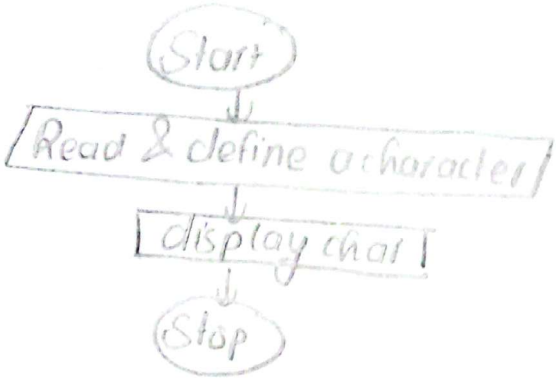

C-programming

-putch()

```
#include <stdio.h>
#include <conio.h>
int main()
{
char ch = 'A';
put ch (ch);
return 0;
}
```

Output

A

-putchar

```
#include <stdio.h>
int main()
{
char ch='A';
put char(ch);
return 0;
}
```

Output

A

Result

The required output was printed

program #4 : WAP in C to illustrate putch() gets() and put(ch)

problem analysis:

In C-programming gets() & puts() are standard library function used for doing input and output respectively.

Algorithm:

Step1: Start

Step 2: Read character using gets

Step 3: display using puts()

Step 4: Stop

flowchart:

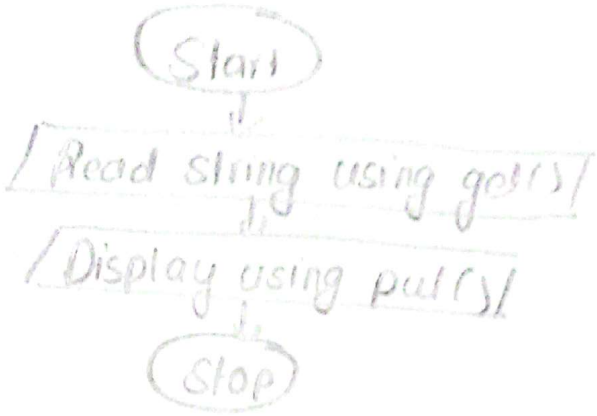

Cprogramming

```
#include <stdio.h>
int main()
{
char name [50];
puts ("Enter your name");
gets (name);
puts ("your name is ");
puts ("name");
return 0;
}
```

Program 6:

```
#include <stdio.h>
int main()
{
int a,b, c;
a=2, b=3;
a=(b++)+(++b)+a;
c=a>b ?a:b;
b=(a++)+(b--)+a
c=c++ * b--;
printf("a=%d \t b=%d \t c=%d\t", a,b,c);
return 0;
}
```

program 1:

Algorithm:

Step1: start

Step2: Read an integers

Step 3: check condition using conditional operators

Step 4: display result

Step 5: stop.

flowchart

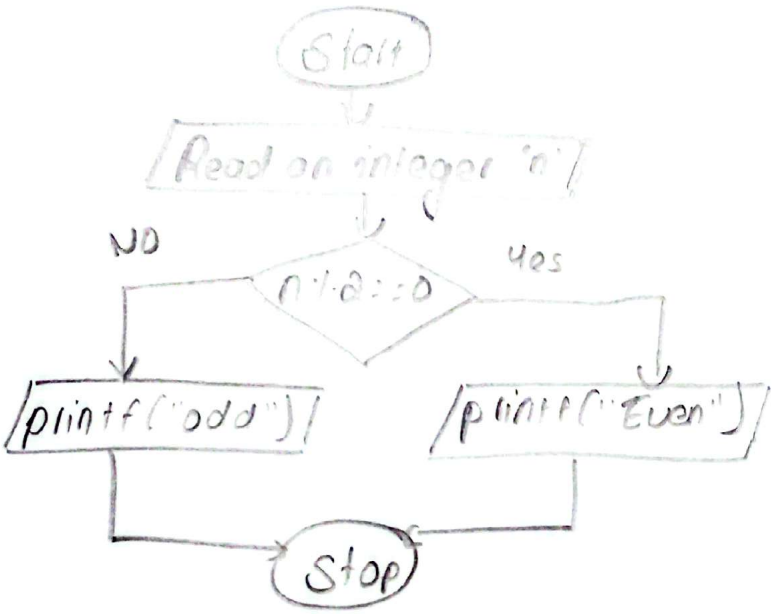

C program

```
#include <stdio.h>
int main()
{
int num;
printf("Enter integer");
scan("%d", &num);
if(num %2 ==0) : printf("%d is even \n", num): printf("%d is odd
\n", num);
return 0;
}
```

Result

Conclusion

From this lab Session we learn about operators and basic output function and also we learn to use getche(), getchar() and to analyse different kind of program.

CamScanner