


Project Design Phase-II Data Flow Diagram & User Stories

Date	30.9.2026
Team ID	SWTID-2026-6203
Project Name	Script Controlled ACL – Restrict Record Access Based on Field Value

Data Flow Diagrams:

A Data Flow Diagram (DFD) is a visual representation of how information flows through the system. For the Script Controlled ACL project, the DFD shows how a user requests access to a record, how the system checks the relevant field value using the scripted ACL, and how access is either allowed or denied.

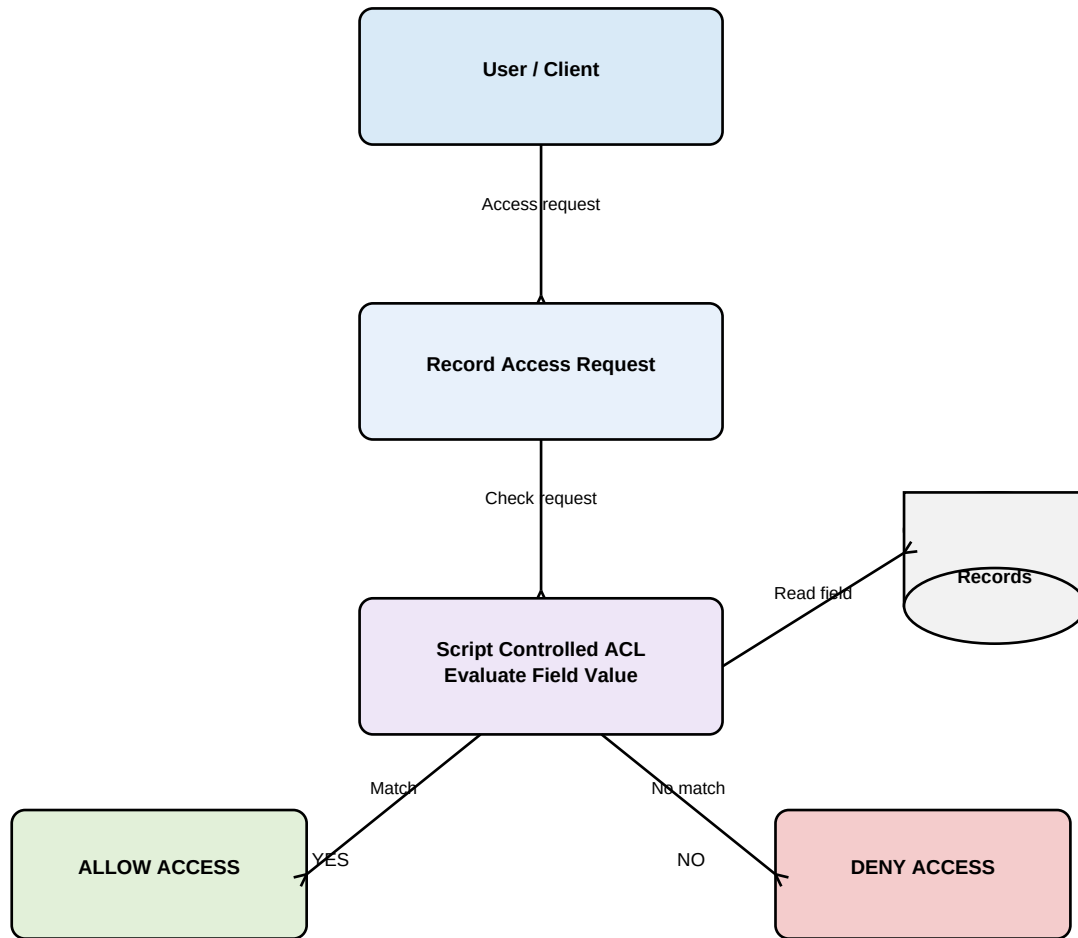

Flow: User → Access Request → Script Controlled ACL → Field Value Check → Allow or Deny Record Access.

User Stories

Use the below template to list the user stories for the product.

User Type	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
System Administrator	USN-1	As an administrator, I can configure a Script Controlled ACL for a record.	ACL is created and the required field and condition are configured.	High	Sprint-1
Authorized User	USN-2	As an authorized user, I can access records when the field value matches the configured condition.	Matching field value allows access to the record.	High	Sprint-1
Unauthorized User	USN-3	As an unauthorized user, I cannot access records when the field value does not match.	Non-matching field value denies record access.	High	Sprint-1
Department Manager	USN-4	As a department manager, I can view records belonging to my department.	Only records with the permitted department value are accessible.	Medium	Sprint-2
Team User	USN-5	As a team user, I can access records assigned to my team.	Records assigned to other teams are restricted.	Medium	Sprint-2
Security Administrator	USN-6	As a security administrator, I can test ACL behaviour with different users and field values.	Authorized and unauthorized test cases produce the expected access result.	Low	Sprint-2

Acceptance Criteria Summary

The system must evaluate the configured field value before granting access. A matching value allows the user to access the record, while a non-matching value denies access. The ACL should behave consistently for different users and records.