

Max

Max

When you open the question, and go into the **code** section you are presented with two arrays.

First Array :

```
var
arrDepartments: array [1..8] of String = (
  'PCs & Notebooks',
  'Tablets & eReaders',
  'Software',
  'Printers, Toners and Ink',
  'Cellphones',
  'Gaming & Drones',
  'Network Equipment',
  'Accessories'
);
```

There is nothing complicated about this array, its a string array of 8 elements, and they have intialized it for us with values.

Second Array which is the 2D array :

```
arrSales : array[1..8, 1..6] of Real = (
  (935.89, 965.99, 4056.77, 5023.89, 3802.66, 1146.98) ,
  (2667.78, 2491.78, 1989.65, 2647.88, 1601.56, 1921.99) ,
  (6702.45, 4271.56, 3424.45, 3924.55, 3085.45, 3359.77) ,
  (6662.34, 6658.45, 8075.43, 2360.66, 2635.44, 7365.69) ,
  (16405.33, 9741.37, 13381.56, 18969.76, 8604.55, 20207.56) ,
  (10515.29, 7582.66, 9856.56, 7537.68, 9115.67, 8401.55) ,
  (7590.99, 9212.65, 9070.98, 6439.99, 7984.88, 8767.45) ,
  (9220.65, 8097.99, 10067.44, 9960.87, 10109.56, 6571.66) );
```

This array does look complicated by its appearance, but its quite simple if you understand it - what you will take from it is :

- Data Type : float
- Row : 1..8
- Col : 1..6

To visualize the strucutre - I copied the code from the section [The rows and columns of arrNums](#) and made a few changed and pasted it under the code for the first button :

```
[1][1] [1][2] [1][3] [1][4] [1][5] [1][6]
[2][1] [2][2] [2][3] [2][4] [2][5] [2][6]
[3][1] [3][2] [3][3] [3][4] [3][5] [3][6]
[4][1] [4][2] [4][3] [4][4] [4][5] [4][6]
[5][1] [5][2] [5][3] [5][4] [5][5] [5][6]
[6][1] [6][2] [6][3] [6][4] [6][5] [6][6]
[7][1] [7][2] [7][3] [7][4] [7][5] [7][6]
[8][1] [8][2] [8][3] [8][4] [8][5] [8][6]
```

The code :

```
//
=====
// Question 3.1
//
=====
procedure TfrmQuestion3.btnQ3_1Click(Sender: TObject);
var row, col : integer;
str : string;
begin
  for row := 1 to 8 do
    begin
      str := '';
      for col := 1 to 6 do
        begin
          str := str + '['+inttostr(row)+'']+'['+inttostr(col)+'']' + ' ';
        end;
        redQ3.Lines.Add(str);
      end;
    end;
end;
```

Question 3.1

3.1 Button [3.1 – Sales information]

Display the content of the **arrSales** array with suitable headings in the output component provided. All monetary values must be displayed in currency format with TWO decimal places.

Example of output:

Department	Week 1	Week 2	Week 3	Week 4	Week 5	Week 6
PCs & Laptops	R 935.89	R 965.99	R 4 056.77	R 5 023.89	R 3 802.66	R 1 146.98
Tablets & eReaders	R 2 667.78	R 2 491.78	R 1 989.65	R 2 647.88	R 1 601.56	R 1 921.99
Software	R 6 702.45	R 4 271.56	R 3 424.45	R 3 924.55	R 3 085.45	R 3 359.77
Printers, Toners and Ink	R 6 662.34	R 6 658.45	R 8 075.43	R 2 360.66	R 2 635.44	R 7 365.69
Cellphones	R 16 405.33	R 9 741.37	R 13 381.56	R 18 969.76	R 8 604.55	R 20 207.56
Games & Drones	R 10 515.29	R 7 582.66	R 9 856.56	R 7 537.68	R 9 115.67	R 8 401.55
Network Equipment	R 7 590.99	R 9 212.65	R 9 070.98	R 6 439.99	R 7 984.88	R 8 767.45
Accessories	R 9 220.65	R 8 097.99	R 10 067.44	R 9 960.87	R 10 109.56	R 6 571.66

We can see the similarity between the the way our 2D array is structured, and the way the way the question wants the information.

This question is straightforward:

- Create the formatting for the rich edit.(headings,floattostrf)
- two for loops to display the the 2D array

However you should take not the left most column in question ("Department, PCc & laptops..) is contained in the first array now its is not so straightforward because we have to use both arrays.

Lets start by getting our data from the 2D-array onto the richedit.

So 8 rows and 6 columns :

```
for row := 1 to 8 do
  begin
    for col := 1 to 6 do
      begin

        end;

      end;
    end;
```

And then adding in a str variable, to output the values to the richedit :

```
procedure TfrmQuestion3.btnQ3_1Click(Sender: TObject);
var row, col : integer;
str : string;
begin
  for row := 1 to 8 do
    begin
      str := '';
      for col := 1 to 6 do
        begin
          str := str + floattostrf(arrSales[row,col],ffcurrency,10,2)+ #9;
        end;
        redQ3.Lines.Add(str);
      end;
    end;
  end;
```

Unfortunately, the question did come with **included code**, which affects our output - so we end up with something like this :

Question 3


MajorMax.com

3.1 - Sales information

3.2 - Display underperforming departments

3.3 - New week

R 935.89	R 965.99	R 4 056.77	R 5 023.89	R 3 802.66	R 1 146.98
R 2 667.78	R 2 491.78	R 1 989.65	R 2 647.88	R 1 601.56	R 1 921.99
R 6 702.45	R 4 271.56	R 3 424.45	R 3 924.55	R 3 085.45	R 3 359.77
R 6 662.34	R 6 658.45	R 8 075.43	R 2 360.66	R 2 635.44	R 7 365.69
R 16 405.33	R 9 741.37	R 13 381.56	R 18 969.76	R 8 604.55	R 20 207.56
R 10 515.29	R 7 582.66	R 9 856.56	R 7 537.68	R 9 115.67	R 8 401.55
R 7 590.99	R 9 212.65	R 9 070.98	R 6 439.99	R 7 984.88	R 8 767.45
R 9 220.65	R 8 097.99	R 10 067.44	R 9 960.87	R 10 109.56	R 6 571.66

 Close

From this image, we can see the first column does not look like the rest. The first column is where the information from `arrDepartments` should be.

Now if you recall, arrDepartments was declared as follows :

```
var  
arrDepartments: array [1..8] of String = (  
    'PCs & Notebooks',  
    'Tablets & eReaders',  
    'Software',  
    'Printers, Toners and Ink',  
    'Cellphones',  
    'Gaming & Drones',  
    'Network Equipment',  
    'Accessories'  
) ;
```

What is interesting is that it also has 8 elements, like the rows in our 2D array. So then, perhaps we could fit into our code ? Remember to output the values from `arrDepartments`, we would need something like :

```
for i:= 1 to 8 do
    redQ3.Lines.Add(arrDepartments[i]);
```

We change our code by only one line :

```
procedure TfrmQuestion3.btnQ3_1Click(Sender: TObject);
var row, col : integer;
str : string;
begin
  for row := 1 to 8 do
    begin
      str := '';
      for col := 1 to 6 do
        begin
          str := str + floattostrf(arrSales[row,col],ffcurrency,10,2)+ #9;
        end;
        redQ3.Lines.Add(arrDepartments[row] + #9 + str);
      end;
    end;
  end;
```

Which outputs :

MajorMax.com						
3.1 - Sales information	3.2 - Display underperforming departments			3.3 - New week		
PCs & Notebooks	R 935.89	R 965.99	R 4 056.77	R 5 023.89	R 3 802.66	R 1 146.98
Tablets & eReaders	R 2 667.78	R 2 491.78	R 1 989.65	R 2 647.88	R 1 601.56	R 1 921.99
Software	R 6 702.45	R 4 271.56	R 3 424.45	R 3 924.55	R 3 085.45	R 3 359.77
Printers, Toners and Ink	R 6 662.34	R 6 658.45	R 8 075.43	R 2 360.66	R 2 635.44	R 7 365.69
Cellphones	R 16 405.33	R 9 741.37	R 13 381.56	R 18 969.76	R 8 604.55	R 20 207.56
Gaming & Drones	R 10 515.29	R 7 582.66	R 9 856.56	R 7 537.68	R 9 115.67	R 8 401.55
Network Equipment	R 7 590.99	R 9 212.65	R 9 070.98	R 6 439.99	R 7 984.88	R 8 767.45
Accessories	R 9 220.65	R 8 097.99	R 10 067.44	R 9 960.87	R 10 109.56	R 6 571.66

From this, we can see we are almost there - just to add in the upper headings:

Final code for this question :

```

procedure TfrmQuestion3.btnQ3_1Click(Sender: TObject);
var row, col : integer;
str : string;
begin
redQ3.Lines.Add('Department'+#9+'Week1'+#9+'Week2'+#9+'Week3'+#9+'Week4'+#9
'Week5'+#9+'Week6');
for row := 1 to 8 do
begin
str := '';
for col := 1 to 6 do
begin
str := str + floattostrf(arrSales[row,col],ffcurrency,10,2)+ #9;
end;
redQ3.Lines.Add(arrDepartments[row] + #9 + str);
end;
end;
end;

```

Note The memo has a different way of answering the question - you can follow which way is easier.

Question 3.2

3.2 Button [3.2 – Display underperforming departments]

A report of all underperforming departments per week is required. A department is underperforming when their sales figure is lower than the average sales for all the departments for that week.

Display the report in the output component provided, with suitable headings. All monetary values must be displayed in currency format with TWO decimal places.

Example of output for the first three weeks using the original data:

Underperforming departments per week:	
Week 1: Average sales figure: R 7 587.59	
PCs & Laptops	R 935.89
Tablets & eReaders	R 2 667.78
Software	R 6 702.45
Printers, Toners and Ink	R 6 662.34
Week 2: Average sales figure: R 6 127.81	
PCs & Laptops	R 965.99
Tablets & eReaders	R 2 491.78
Software	R 4 271.56
Week 3: Average sales figure: R 7 490.35	
PCs & Laptops	R 4 056.77
Tablets & eReaders	R 1 989.65
Software	R 3 424.45

This question wants to make some sort of report. We have to create a report based on when a department is Underperforming.

A department is underperforming when:

- Its sales figure is lower than the average sales for every department per week

This raises the question how do we get the "average sales for every department per week"

If you look at question 3.1 - you will see that we need to add up the columns and divide by 8.

Refer to this section [Add the columns of a 2D Array](#)

The first thing we need to do is work out the average per week.

Lets get our our basic loops in place :


```
procedure TfrmQuestion3.btnQ3_2Click(Sender: TObject);
var row,col : integer;
begin
  //Question 3.2
  redQ3.Clear;
  for col:= 1 to 6 do
  begin
    for row := 1 to 8 do
      begin
        end;
      end;
    end;
  end;
```

We now calculate the average per week :

```
procedure TfrmQuestion3.btnQ3_2Click(Sender: TObject);
var row,col : integer;
    average : real;
begin
  //Question 3.2
  redQ3.Clear;
  average := 0;
  for col:= 1 to 6 do
  begin
    average := 0;
    for row := 1 to 8 do
      begin
        average := average + arrSales[row,col];
      end;
    average := average/8;
    redQ3.Lines.Add('Week ' + inttostr(col) + 'Average sales figure ' +
      floattostrf(average,ffcurrency,10,2));
  end;
```

```
end;
end;
```

Which would output :

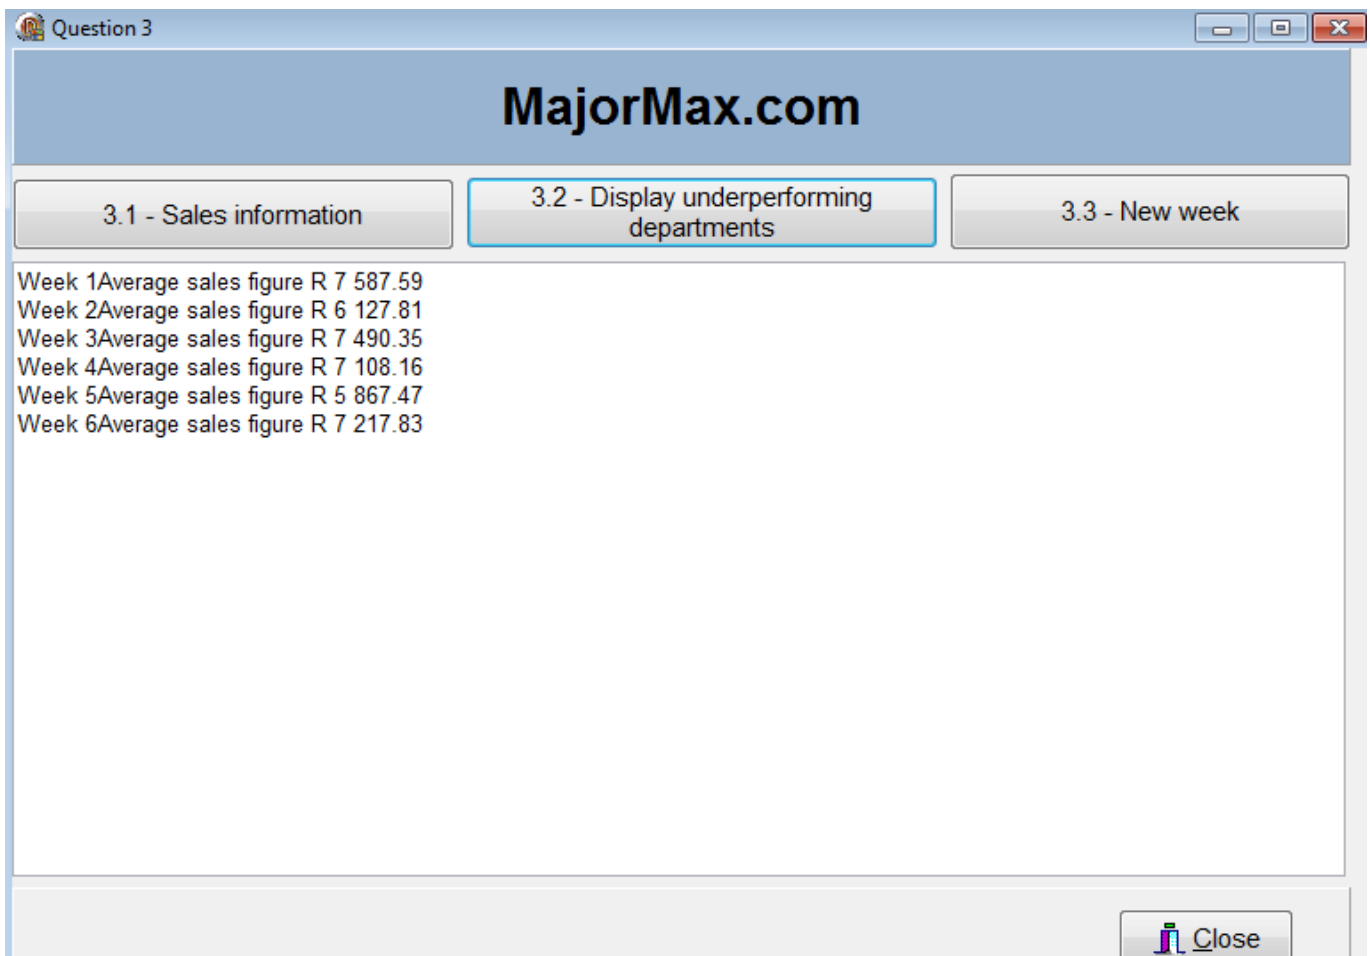

Now we have to compare each departments weekly sale figure, to the average and if it is below, output it. And if that sale value is less than the average per week, output it to the rich edit.

```
for row := 1 to 8 do
begin
  if (arrSales[row,col] < average) then
  begin
    redQ3.Lines.Add(arrDepartments[row] + #9 +
floattostrf(arrSales[row,col],ffcurrency,10,2));
  end;
end;
```

The complete code for this function now looks like this :

```
procedure TfrmQuestion3.btnQ3_2Click(Sender: TObject);
var row,col : integer;
average : real;
begin
```



```

//Question 3.2
redQ3.Clear;
average := 0;
for col:= 1 to 6 do
begin
    average := 0;
    for row := 1 to 8 do
        begin
            average := average + arrSales[row,col];
        end;
        average := average/8;
        redQ3.Lines.Add('Week ' + inttostr(col) + ' Average sales figure ' +
floattostrf(average,ffcurrency,10,2));
        for row := 1 to 8 do
            begin
                if (arrSales[row,col] < average) then
                    begin
                        redQ3.Lines.Add(arrDepartments[row] + #9 +
floattostrf(arrSales[row,col],ffcurrency,10,2));
                    end;
            end;
            redQ3.Lines.Add(#13#10);
        end;
    end;
end;

```

Question 3

MajorMax.com

3.1 - Sales information

3.2 - Display underperforming departments

3.3 - New week

Week 1 Average sales figure R 7 587.59

PCs & Notebooks	R 935.89
Tablets & eReaders	R 2 667.78
Software	R 6 702.45
Printers, Toners and Ink	R 6 662.34

Week 2 Average sales figure R 6 127.81

PCs & Notebooks	R 965.99
Tablets & eReaders	R 2 491.78
Software	R 4 271.56

Week 3 Average sales figure R 7 490.35

PCs & Notebooks	R 4 056.77
Tablets & eReaders	R 1 989.65
Software	R 3 424.45

Week 4 Average sales figure R 7 108.16

PCs & Notebooks	R 5 023.89
Tablets & eReaders	R 2 217.88
Software	R 6 866.42
Printers, Toners and Ink	R 3 000.00

Close

3.3

- Global variable startWeek :

```
iStartWeek: Integer = 1;
```

```
//
=====
// Question 3.3
//
=====

procedure TfrmQuestion3.btnQ3_3Click(Sender: TObject);
var row,col,firstWeek : integer;
str : string;
tx : textFile;
begin
    //Question 3.3
    redQ3.Clear;
    inc(startWeek);
    firstWeek := 1;

    // Write the first Week to a textFile
    AssignFile(tx,'Week ' + inttostr(startWeek) + '.txt');
    Rewrite(tx);
    str := '';
    for row := 1 to 8 do
        begin
            str := arrDepartments[row] + ': ' +
floattostrf(arrSales[row,firstWeek],ffcurrency,10,2);
            Writeln(tx,str);
        end;
    CloseFile(tx);

    // Output the headings to the richedit
    str := 'Department' + #9;
    for col:= startWeek to startWeek + 5 do
        begin
            str := str + 'Week '+inttostr(col)+#9;
        end;
    redQ3.Lines.Add(str);

    // add the week to the array
    for row := 1 to 8 do
        begin
            for col := 1 to 6 do
                begin
                    if (col = 6) then
                        arrSales[row,col] := random(4500) + 500
                    else
                        arrSales[row,col] := arrSales[row,col+1];
                end;
            end;
        end;
    end;
```

```
        end;
    end;

    // display the array
    for row := 1 to 8 do
    begin
        str := '';
        for col := 1 to 6 do
        begin
            str := str + floattostr(arrSales[row,col]) + #9;
        end;
        redQ3.Lines.Add(arrDepartments[row] + #9 + str);
    end;

end;
```