ASSIGNMENT

SUBMITTED BY:

Mehak Akbar

SUBMITTED TO:

SIR ASAD MAJEED

CLASS:

BS_CS (A)

SUBJECT:

PROGRAMMING FUNDAMENTAL (LAB)

TOPIC:

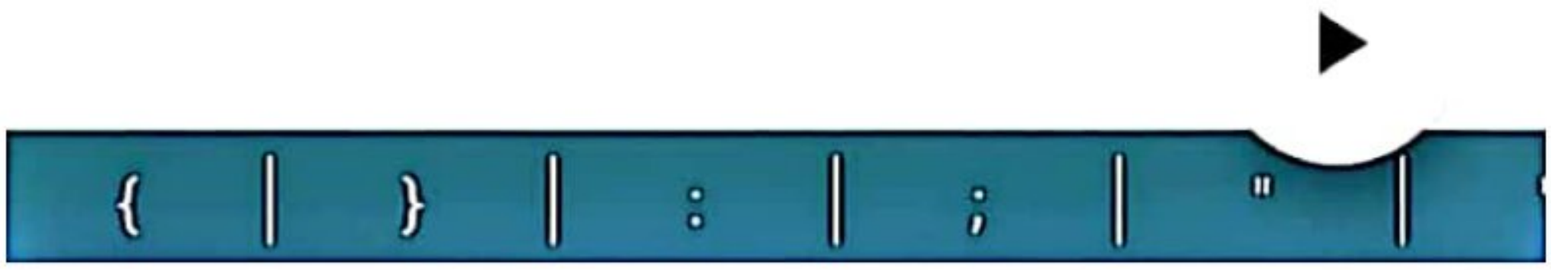
LAB TASK

Scanned with CamScanner

Scanned with CamScanner



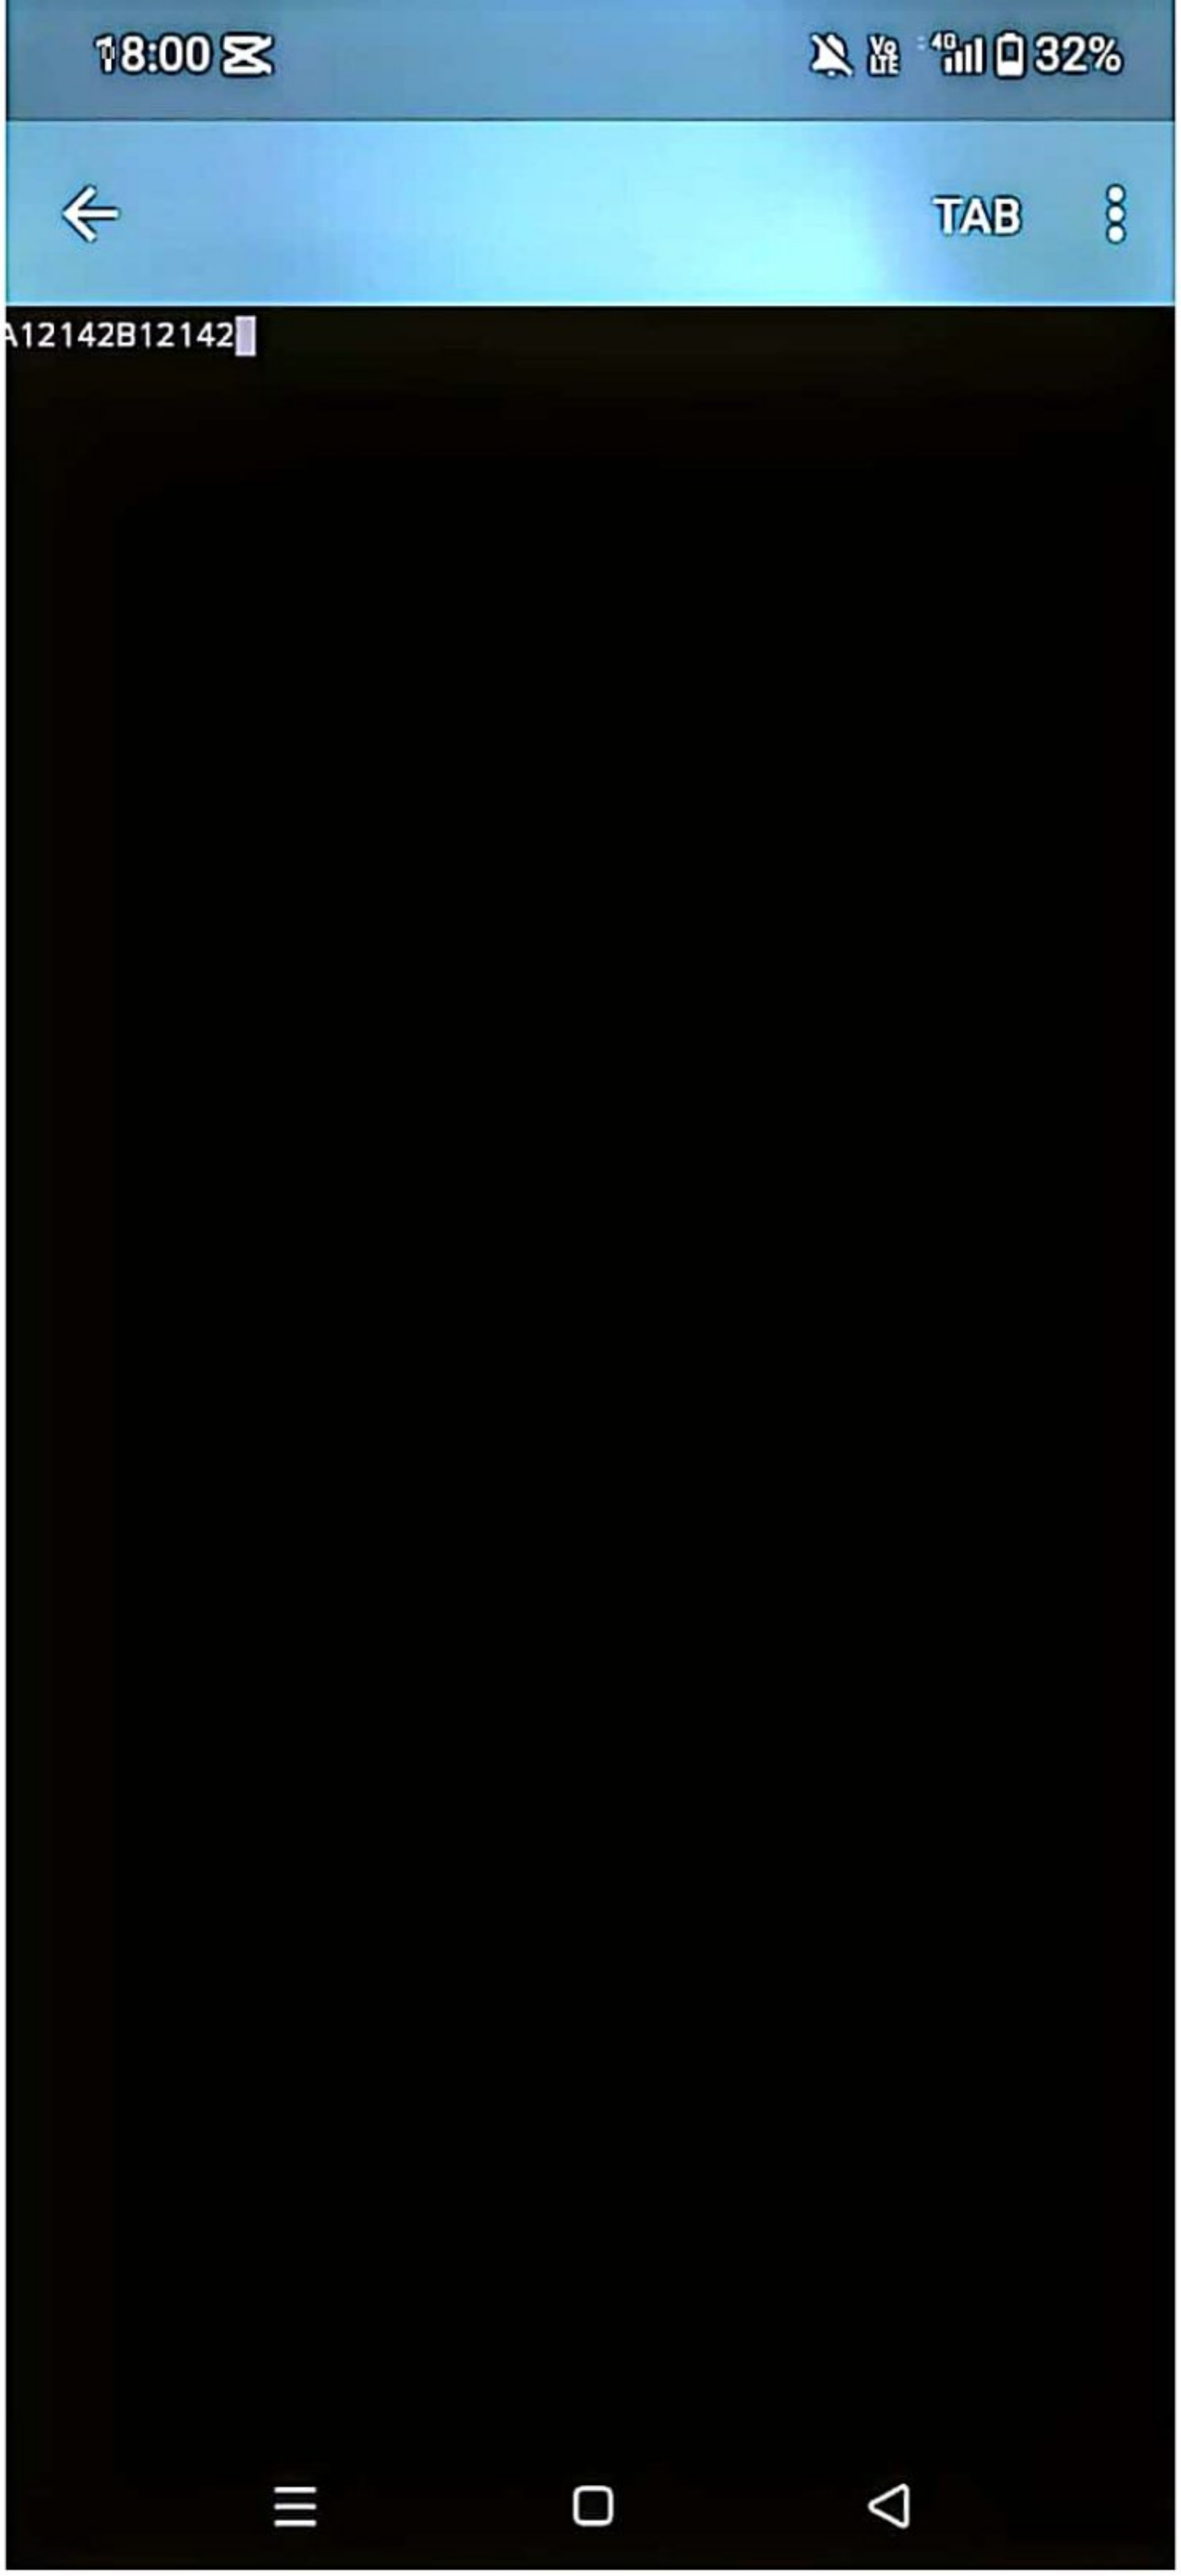

```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      char letter;
6      letter='A';
7      cout<<letter<<'/n';
8      letter='B';
9      cout<<letter<<'/n';
10     cin>>letter;
11     return 0;
12 }
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



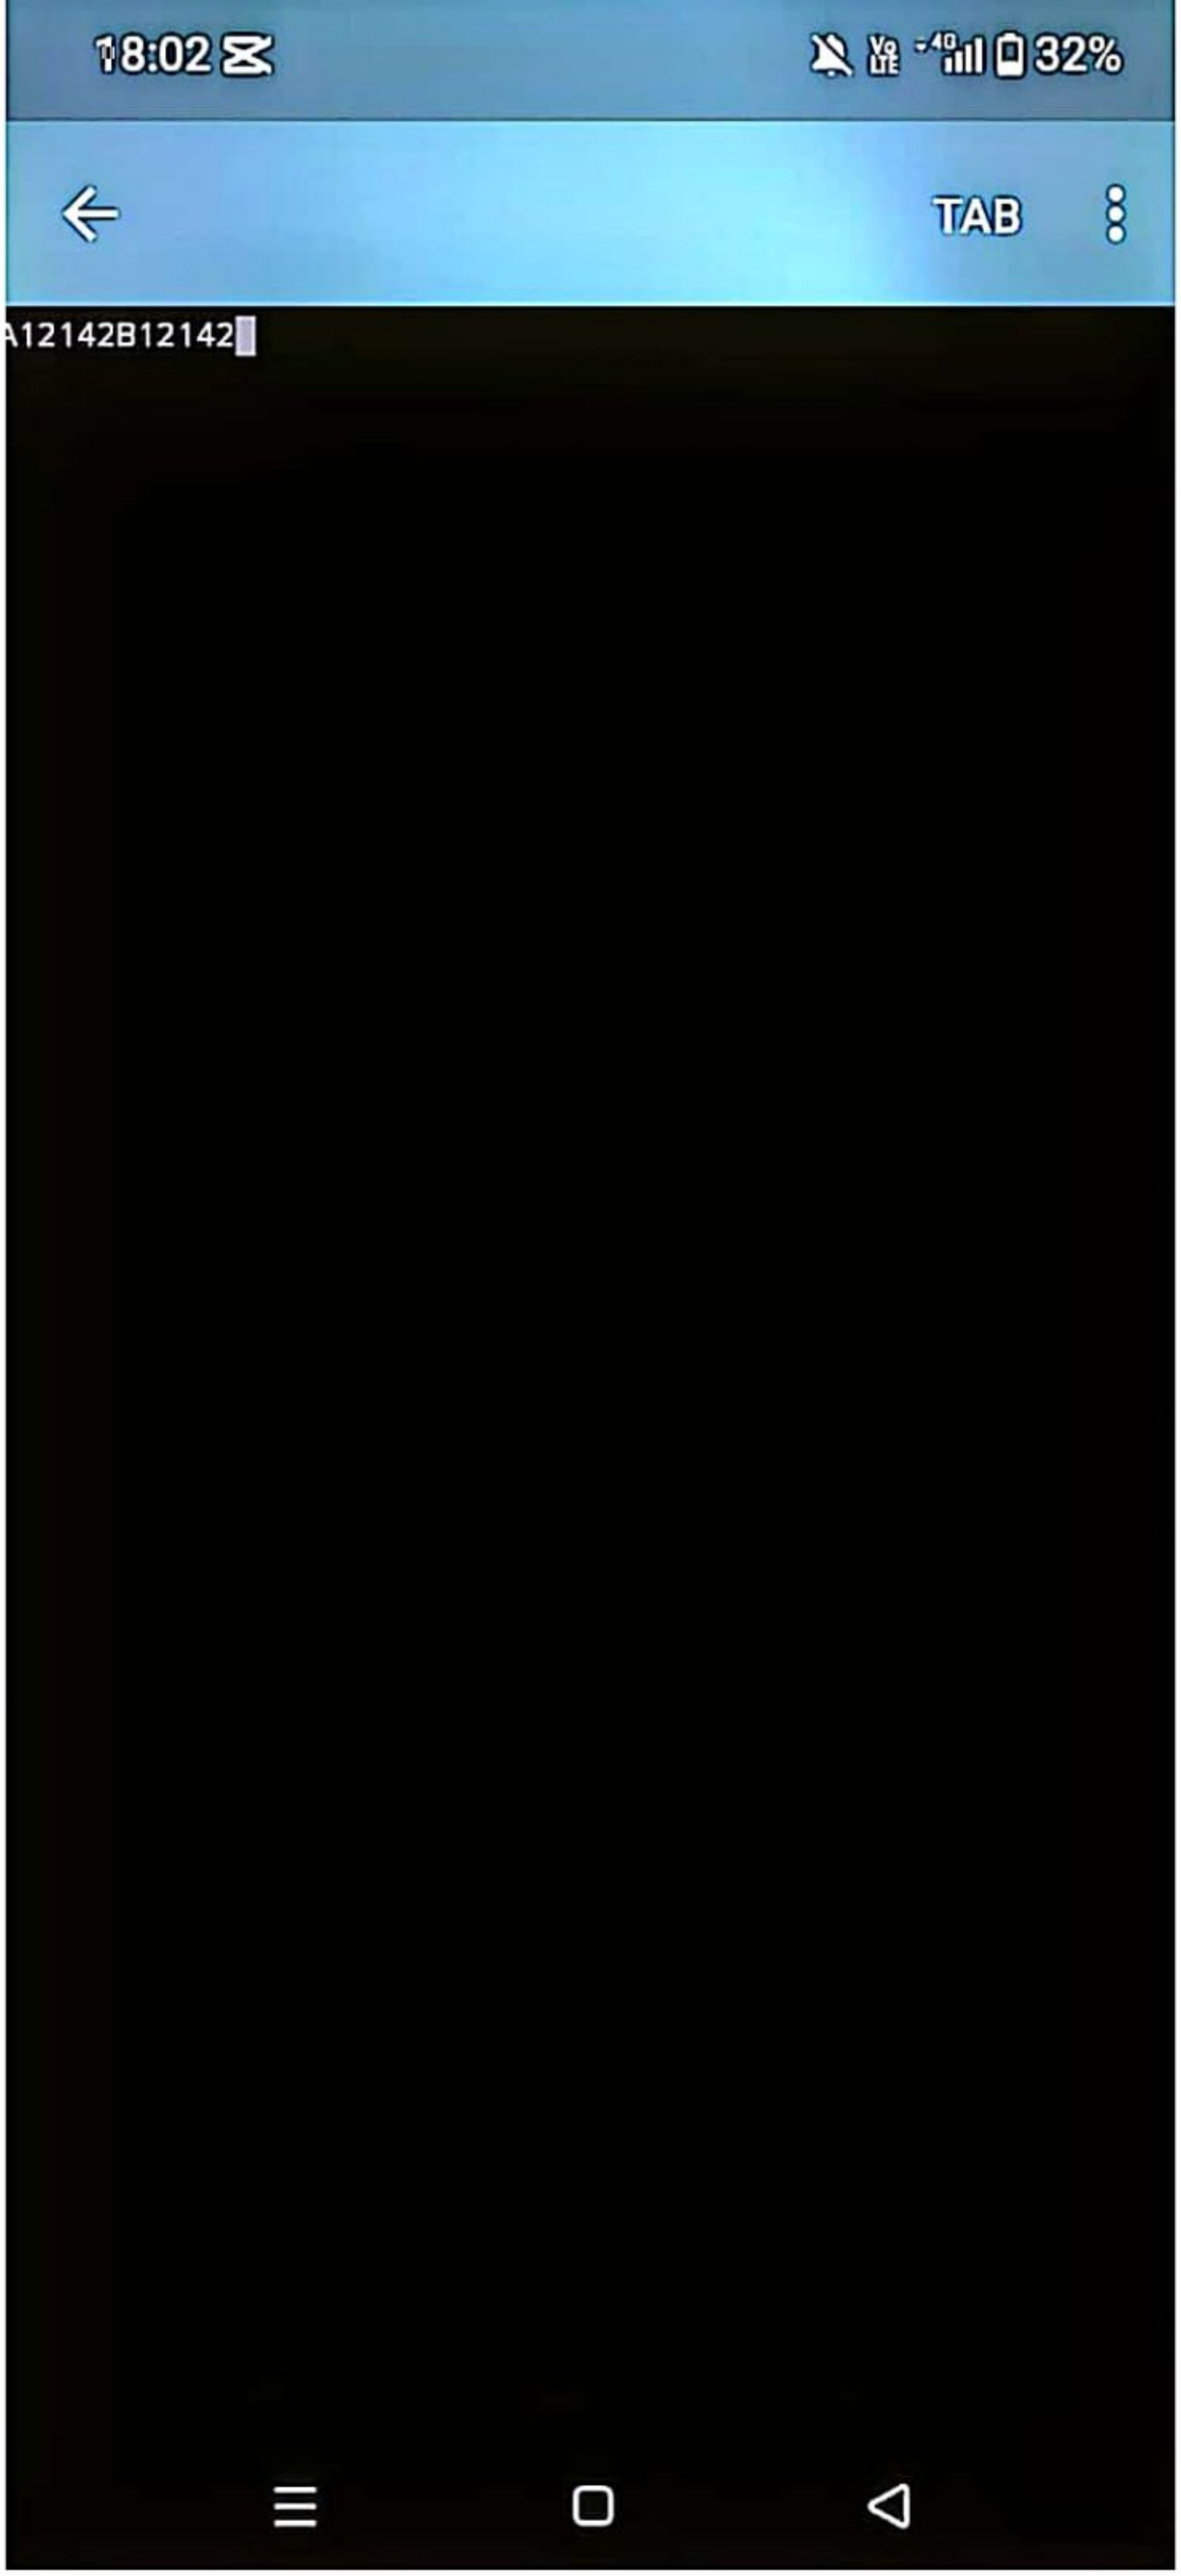

```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      char letter;
6      letter=65;
7      cout<<letter<<'/n';
8      letter=66;
9      cout<<letter<<'/n';
10     cin>>letter;
11     return 0;
12 }
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



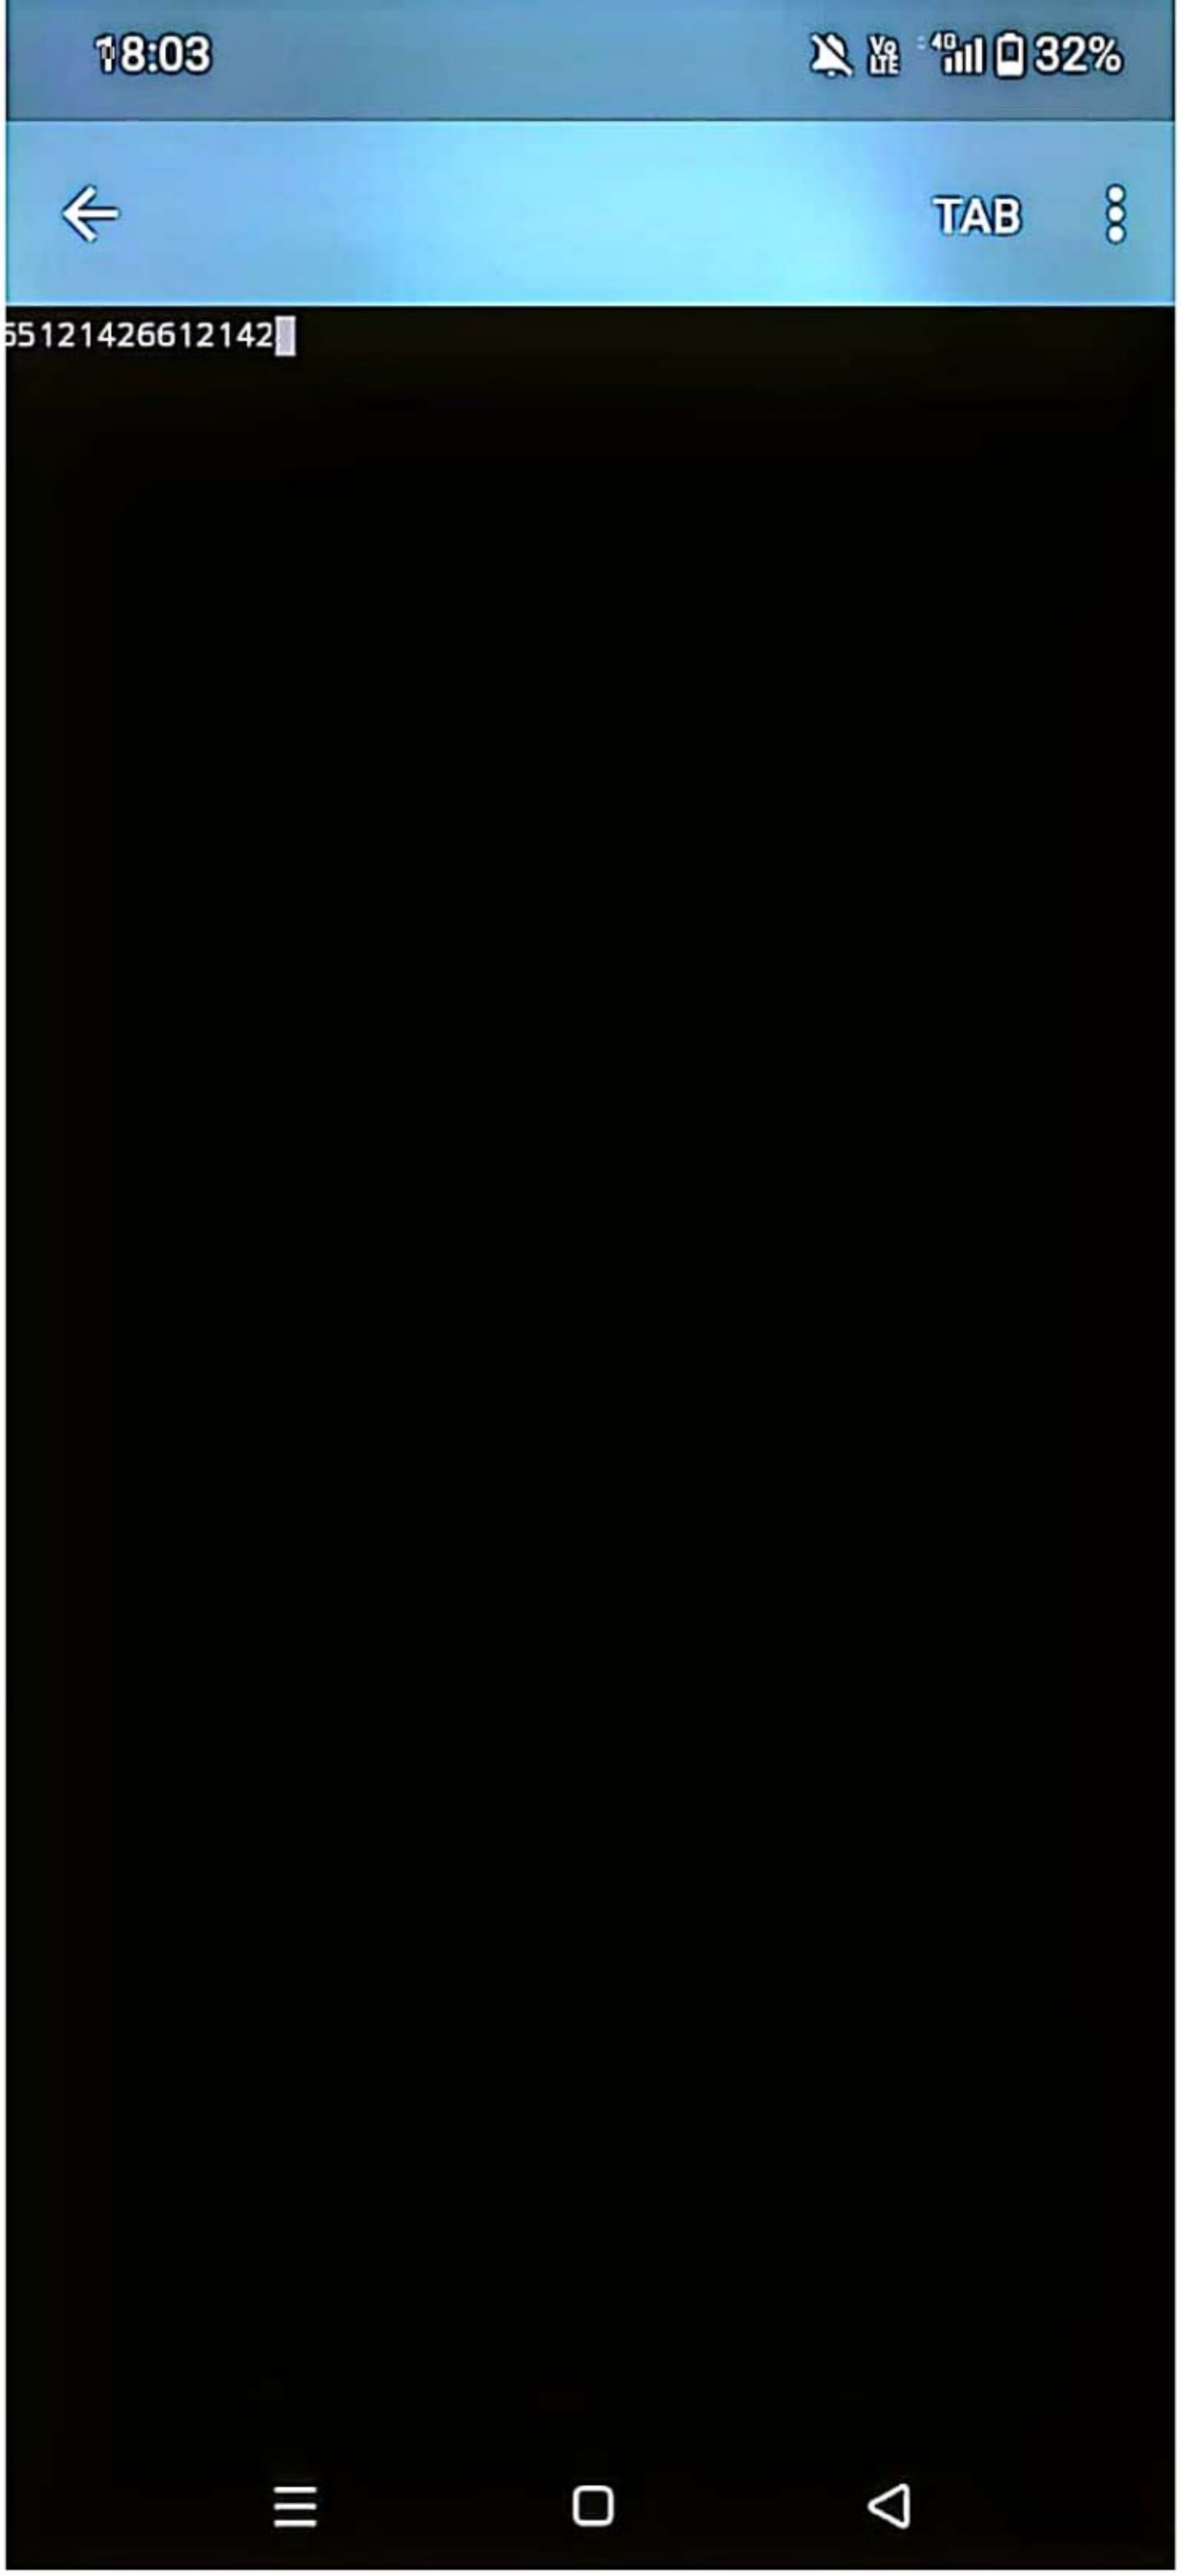

```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      int letter;
6      letter='A';
7      cout<<letter<<'/n';
8      letter='B';
9      cout<<letter<<'/n';
10     cin>>letter;
11     return 0;
12 }
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



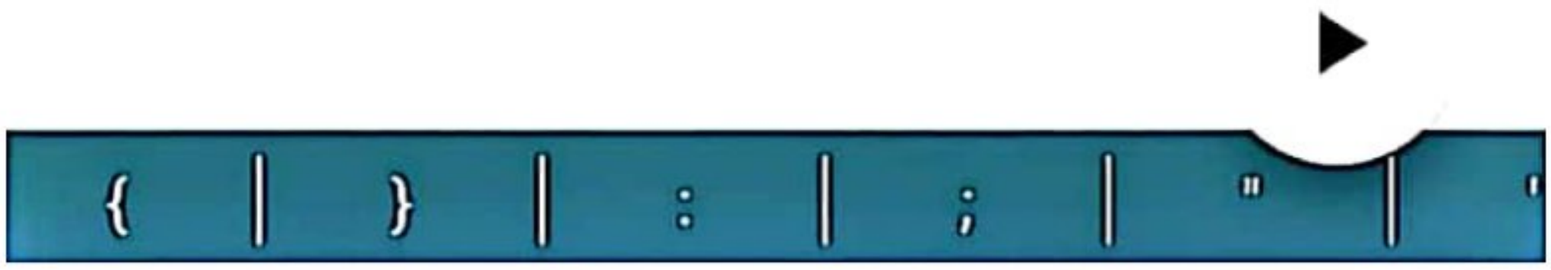
Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



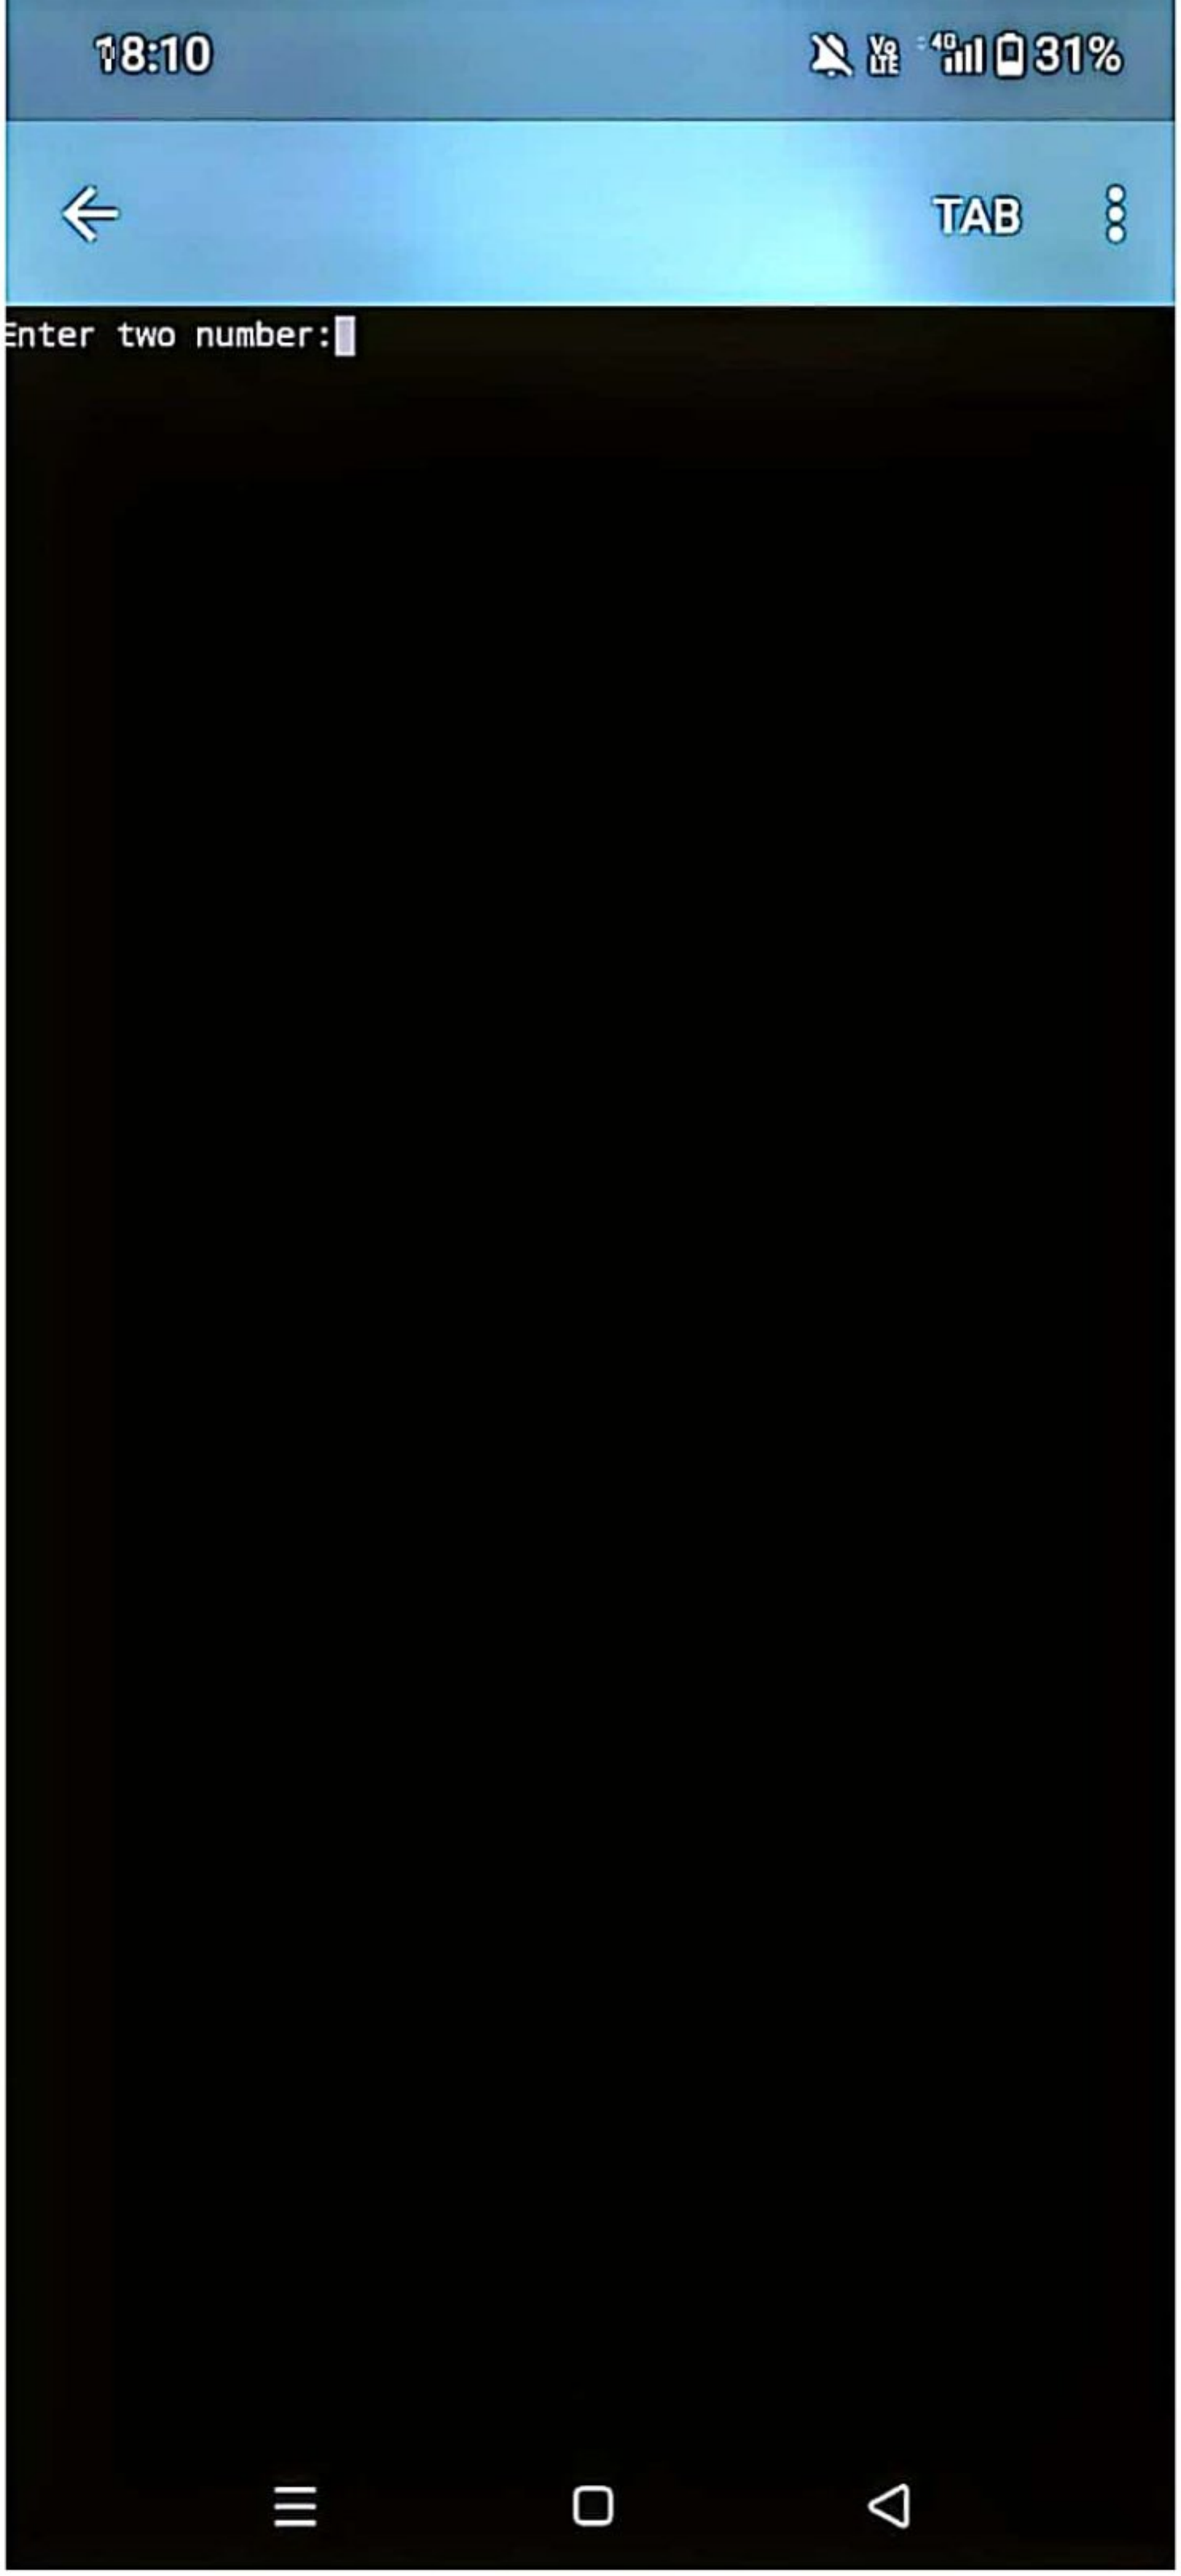

```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      int a,b;
6      cout<<"Enter two number:";
7      cin>>a>>b;
8      cout<<"sum="<<a+b<<endl;
9      cout<<"sub="<<a-b<<endl;
10     cout<<"Mul="<<a*b<<endl;
11      cout<<"Div="<<a/b<<endl;
12      return 0;
13 }
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



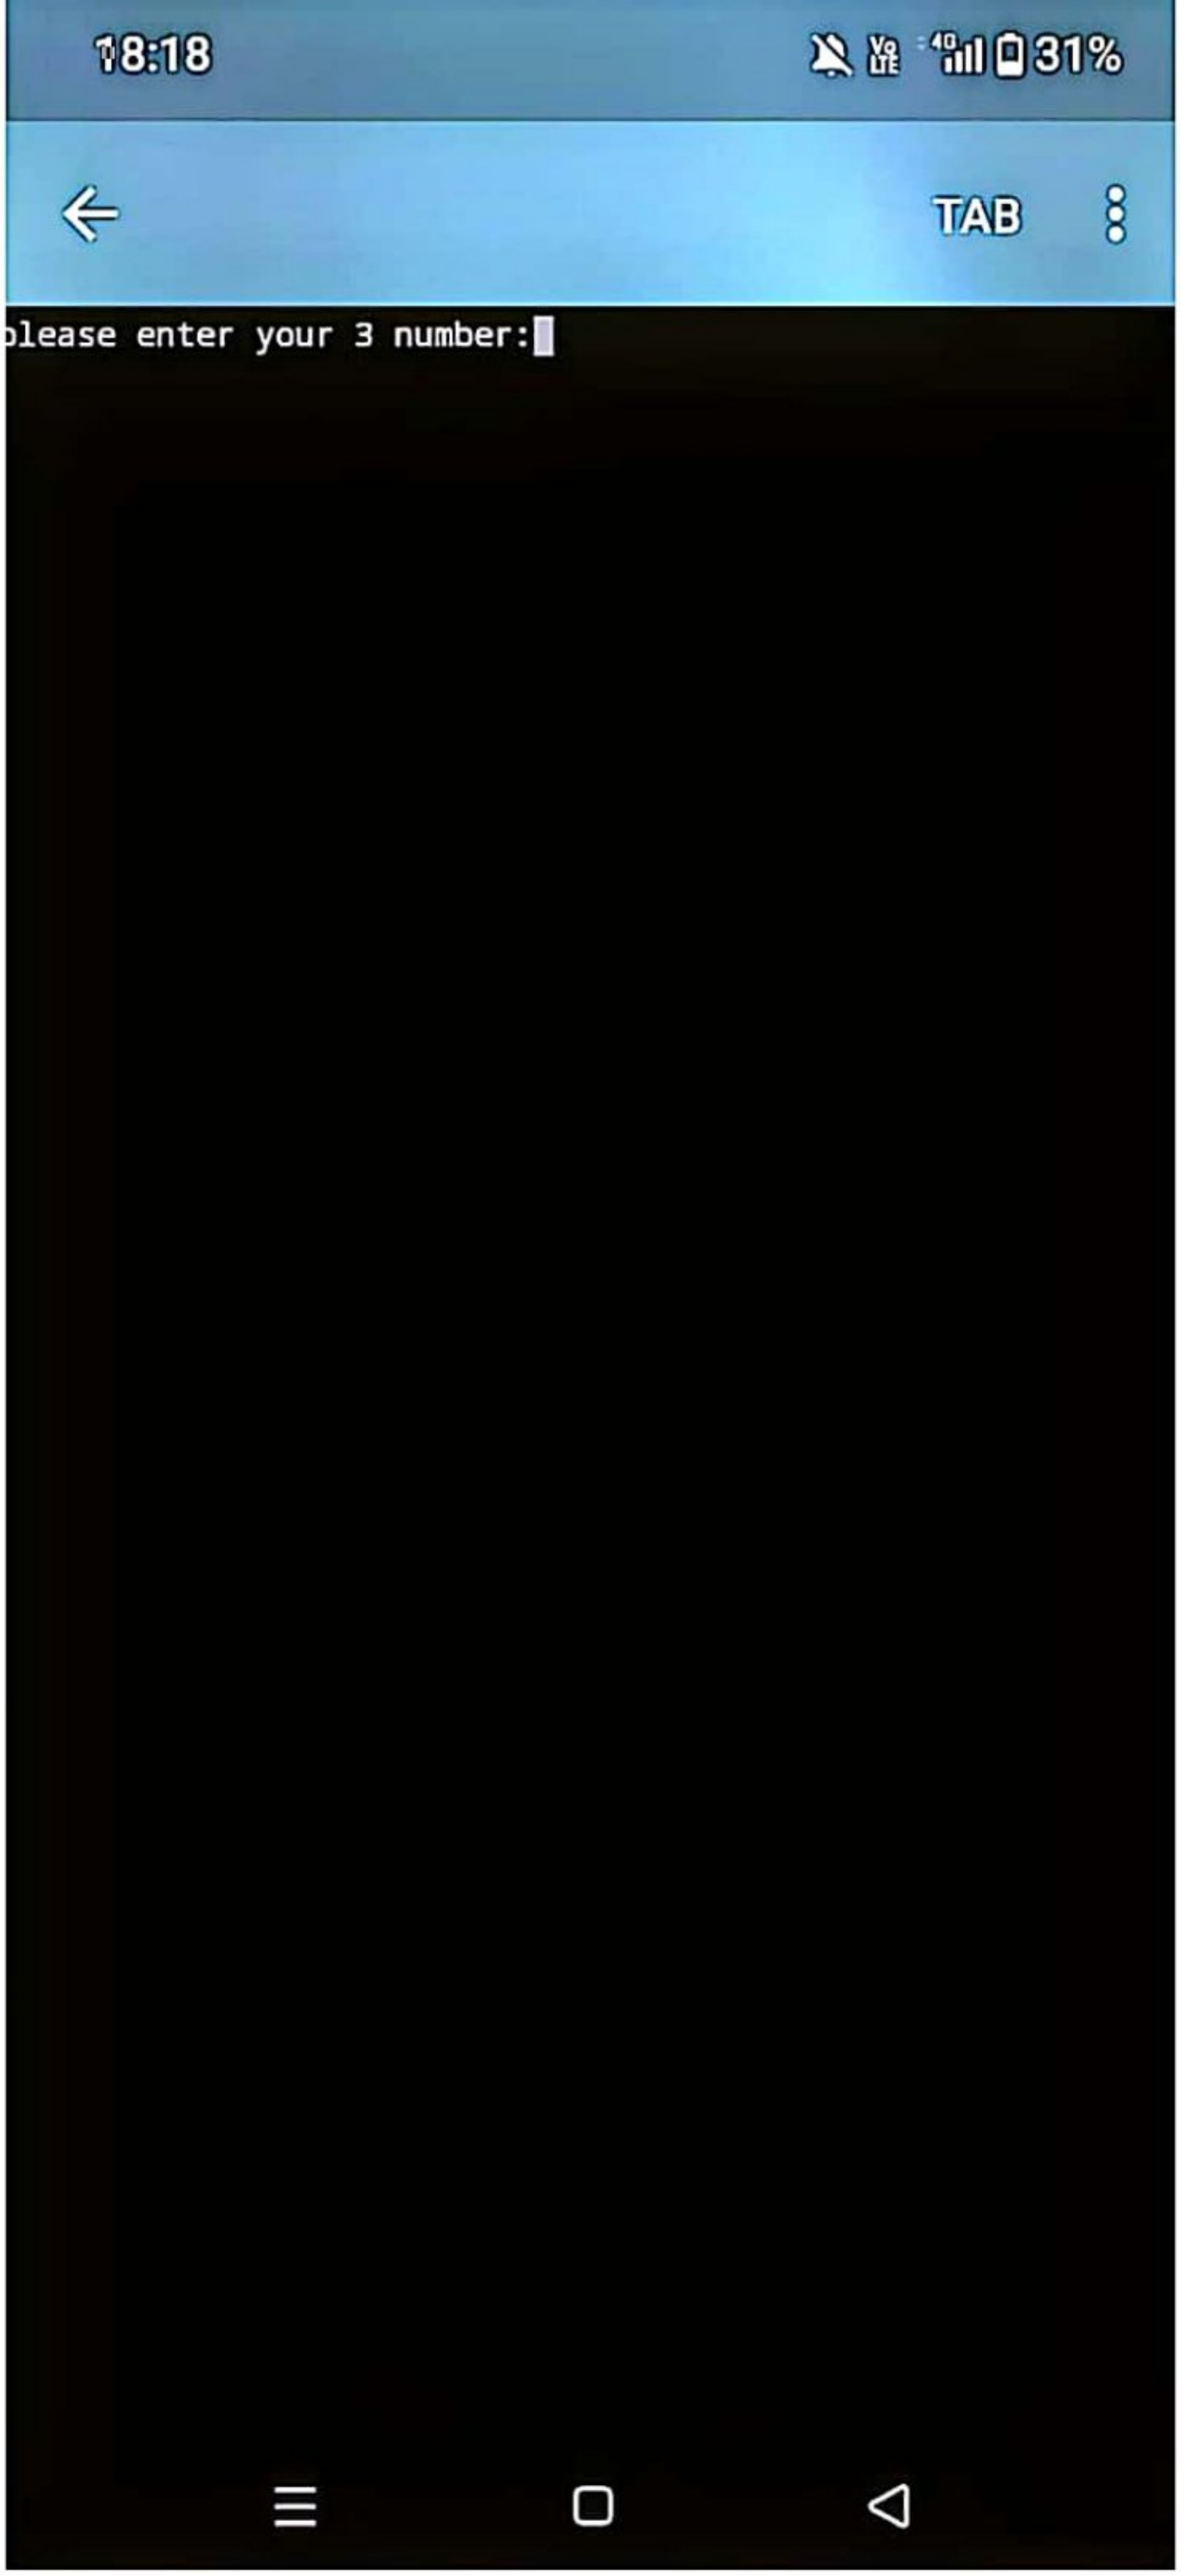

```
1  #include<iostream>
2  using namespace std;
3  int main()
4  {
5      int val1;
6      int val2;
7      int val3;
8      cout<<"please enter your 3 number:";
9      cin>>val1>>val2>>val3;
10     cout<<val1<<"/n"<<val2<<"/n"<<val3<<"/
   n";
11     cout<<val3<<"/n"<<val2<<"/n"<<val1<<"/
   n";
12     system("pause");
13      return 0;
14 }
15
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



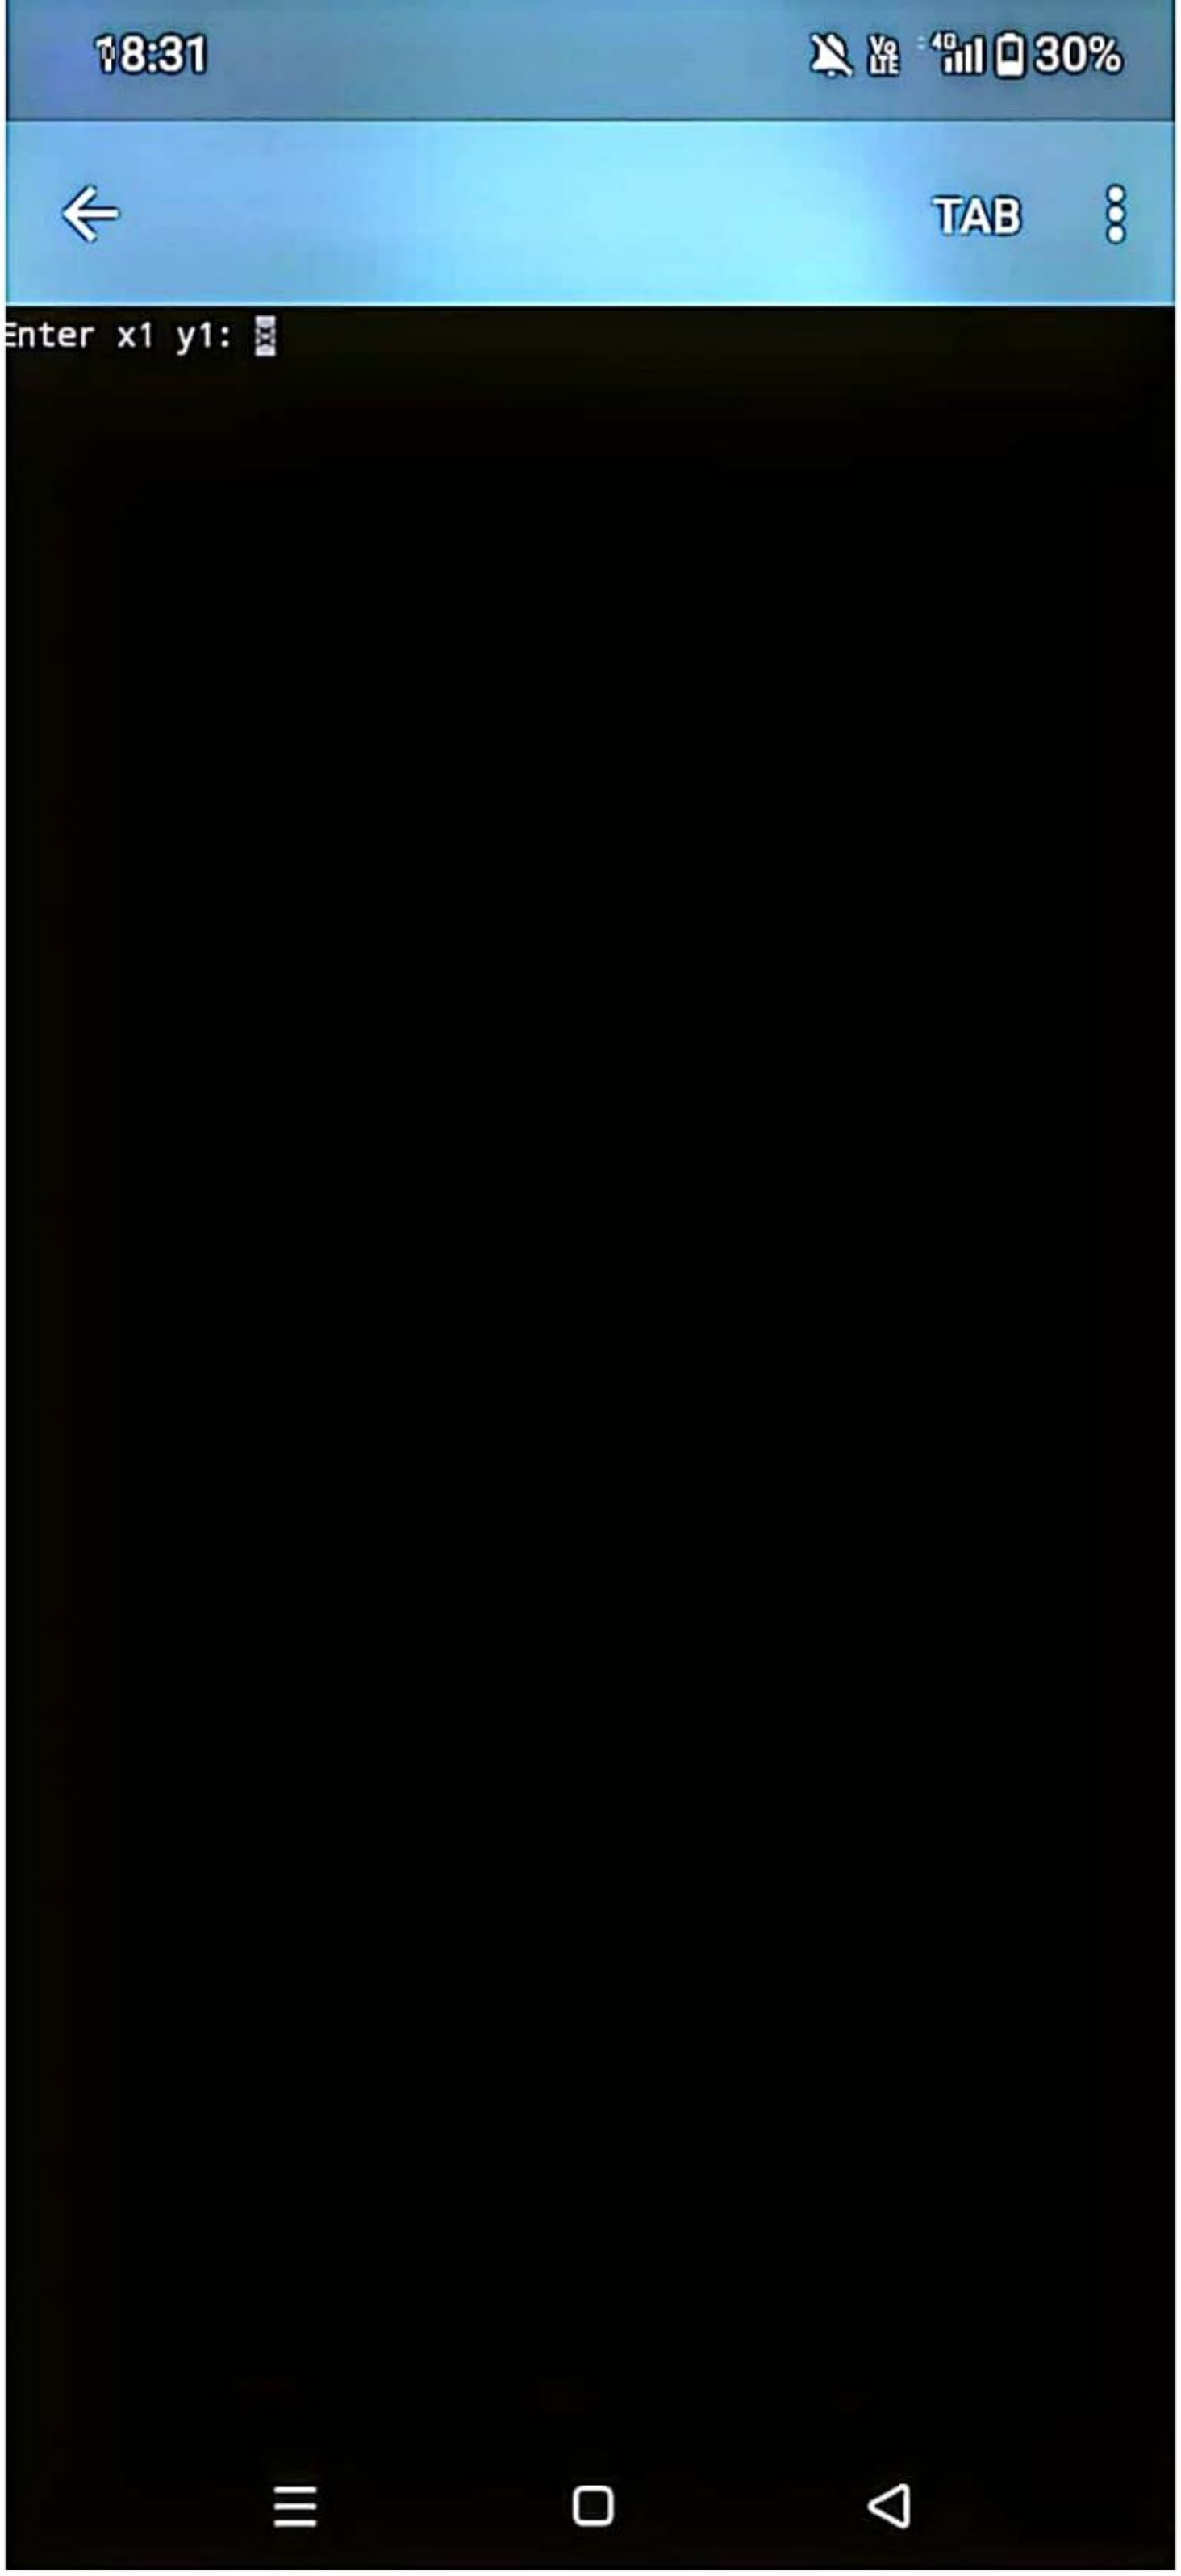

```
1  #include <iostream>
2  #include <cmath> // sqrt ke liye
3  using namespace std;
4  int main()
5  {
6   double x1, y1, x2, y2, distance;
7   cout << "Enter x1 y1: ";
8   cin >> x1 >> y1;
9   cout << "Enter x2 y2: ";
10  cin >> x2 >> y2;
11  distance = sqrt(pow(x2-x1,2) + pow(y2-y1,
    2));
12  cout << "Distance = " << distance;
13  return 0;
14 }
15
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



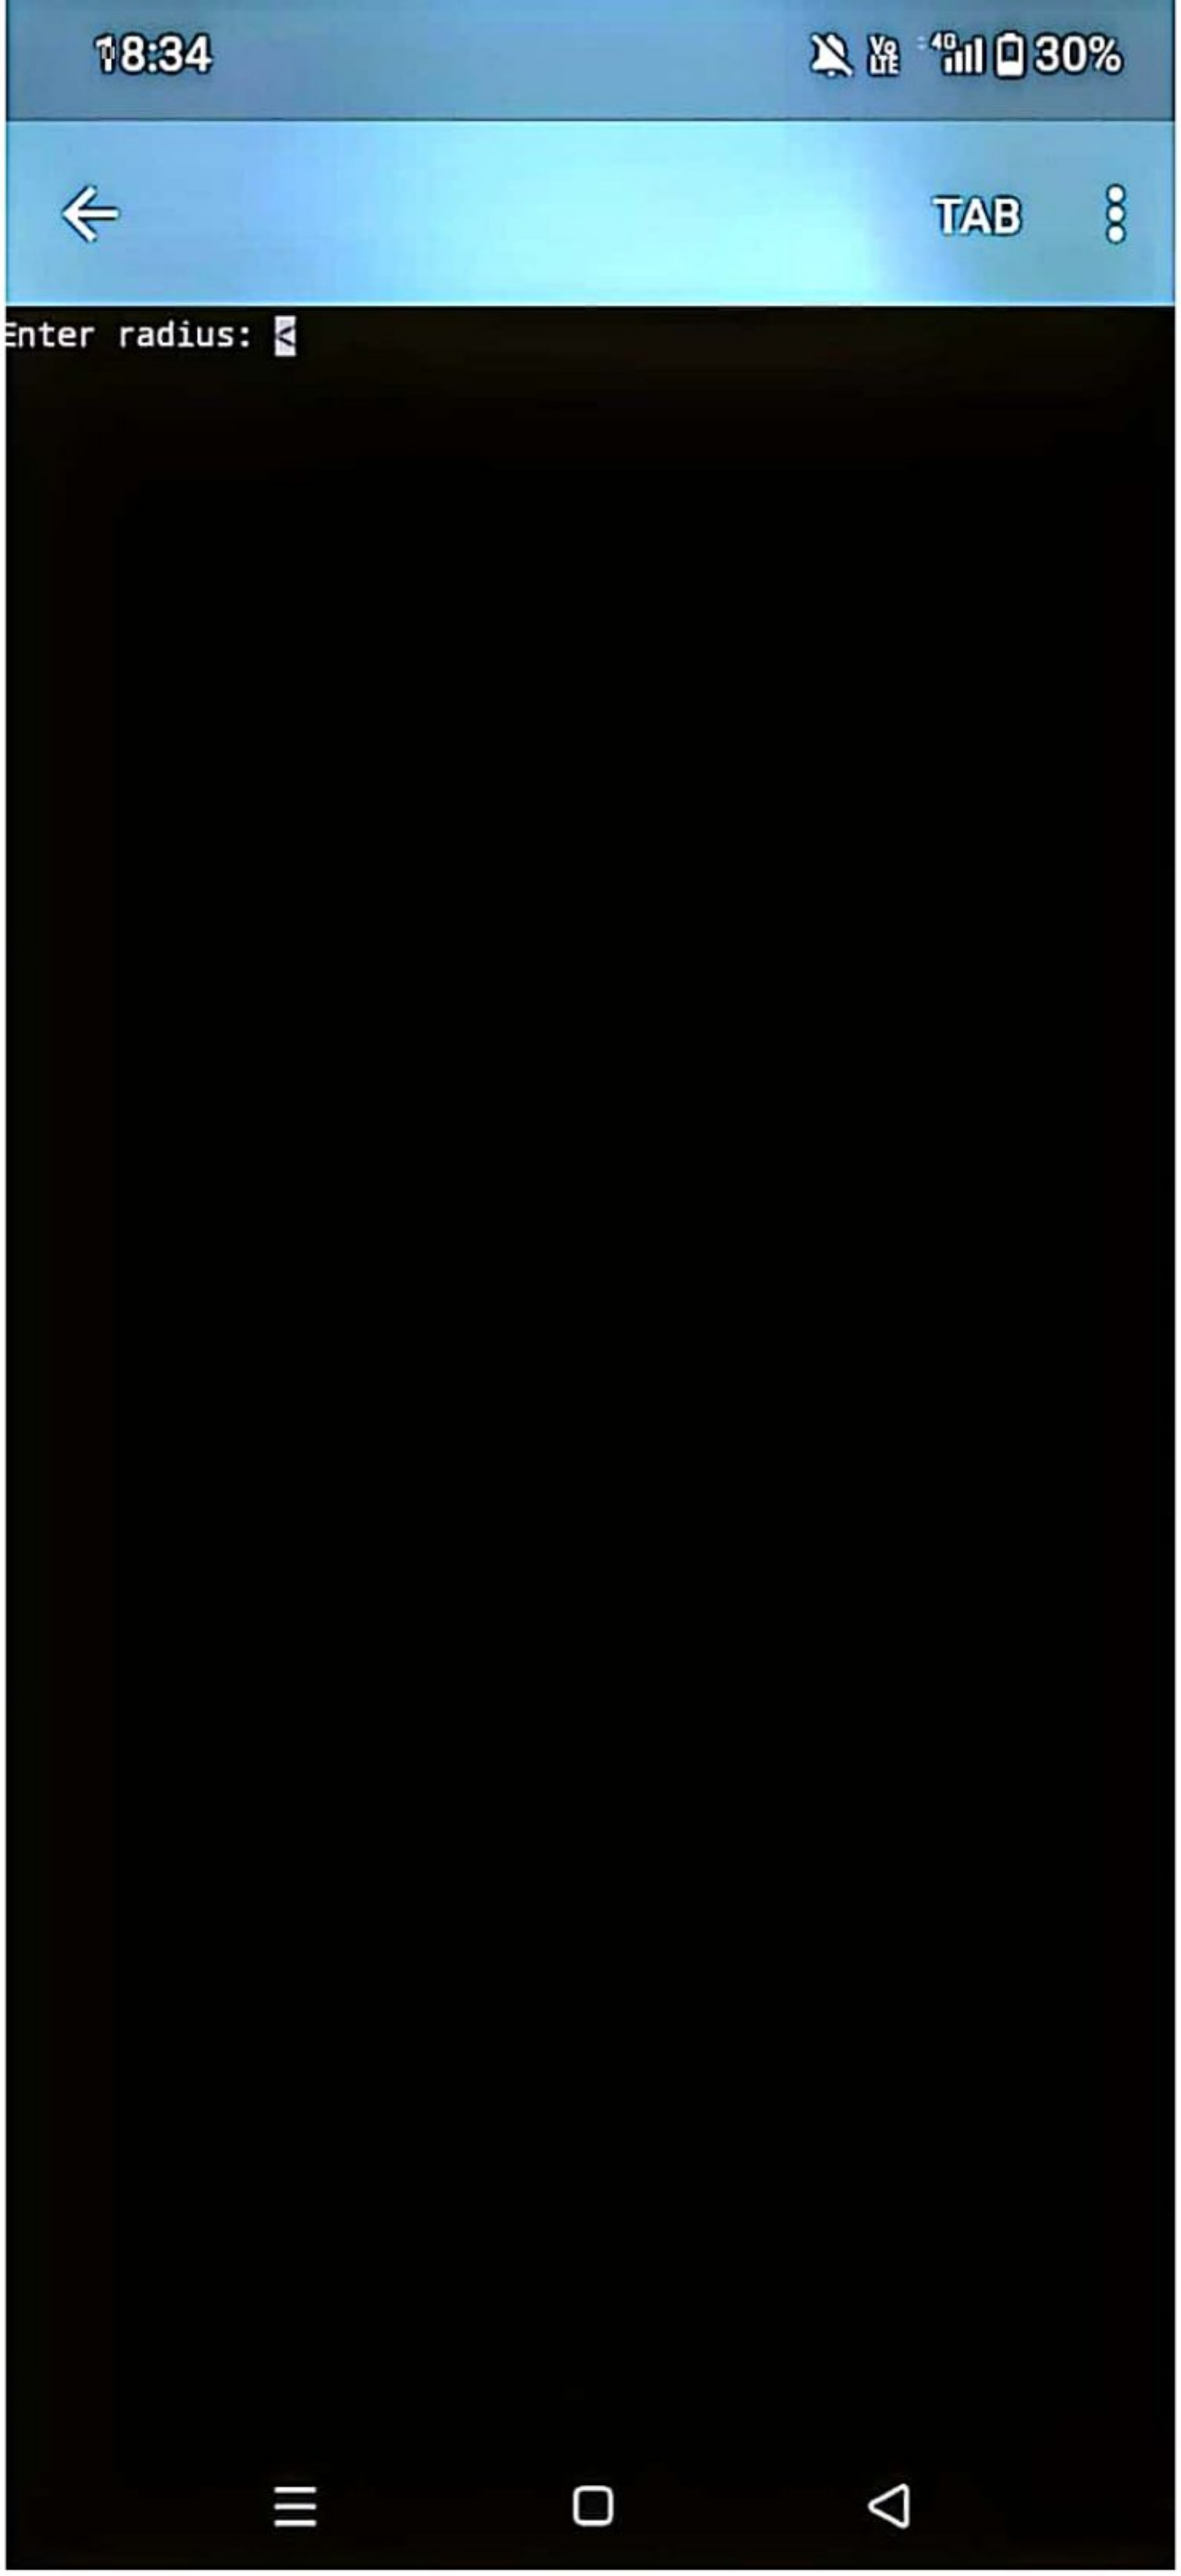

```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   float r, area;
6   const float PI = 3.1416;
7   cout << "Enter radius: ";
8   cin >> r;
9   area = PI * r * r;
10  cout << "Area of Circle = " << area;
11  return 0;
12 }
13
14
15
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



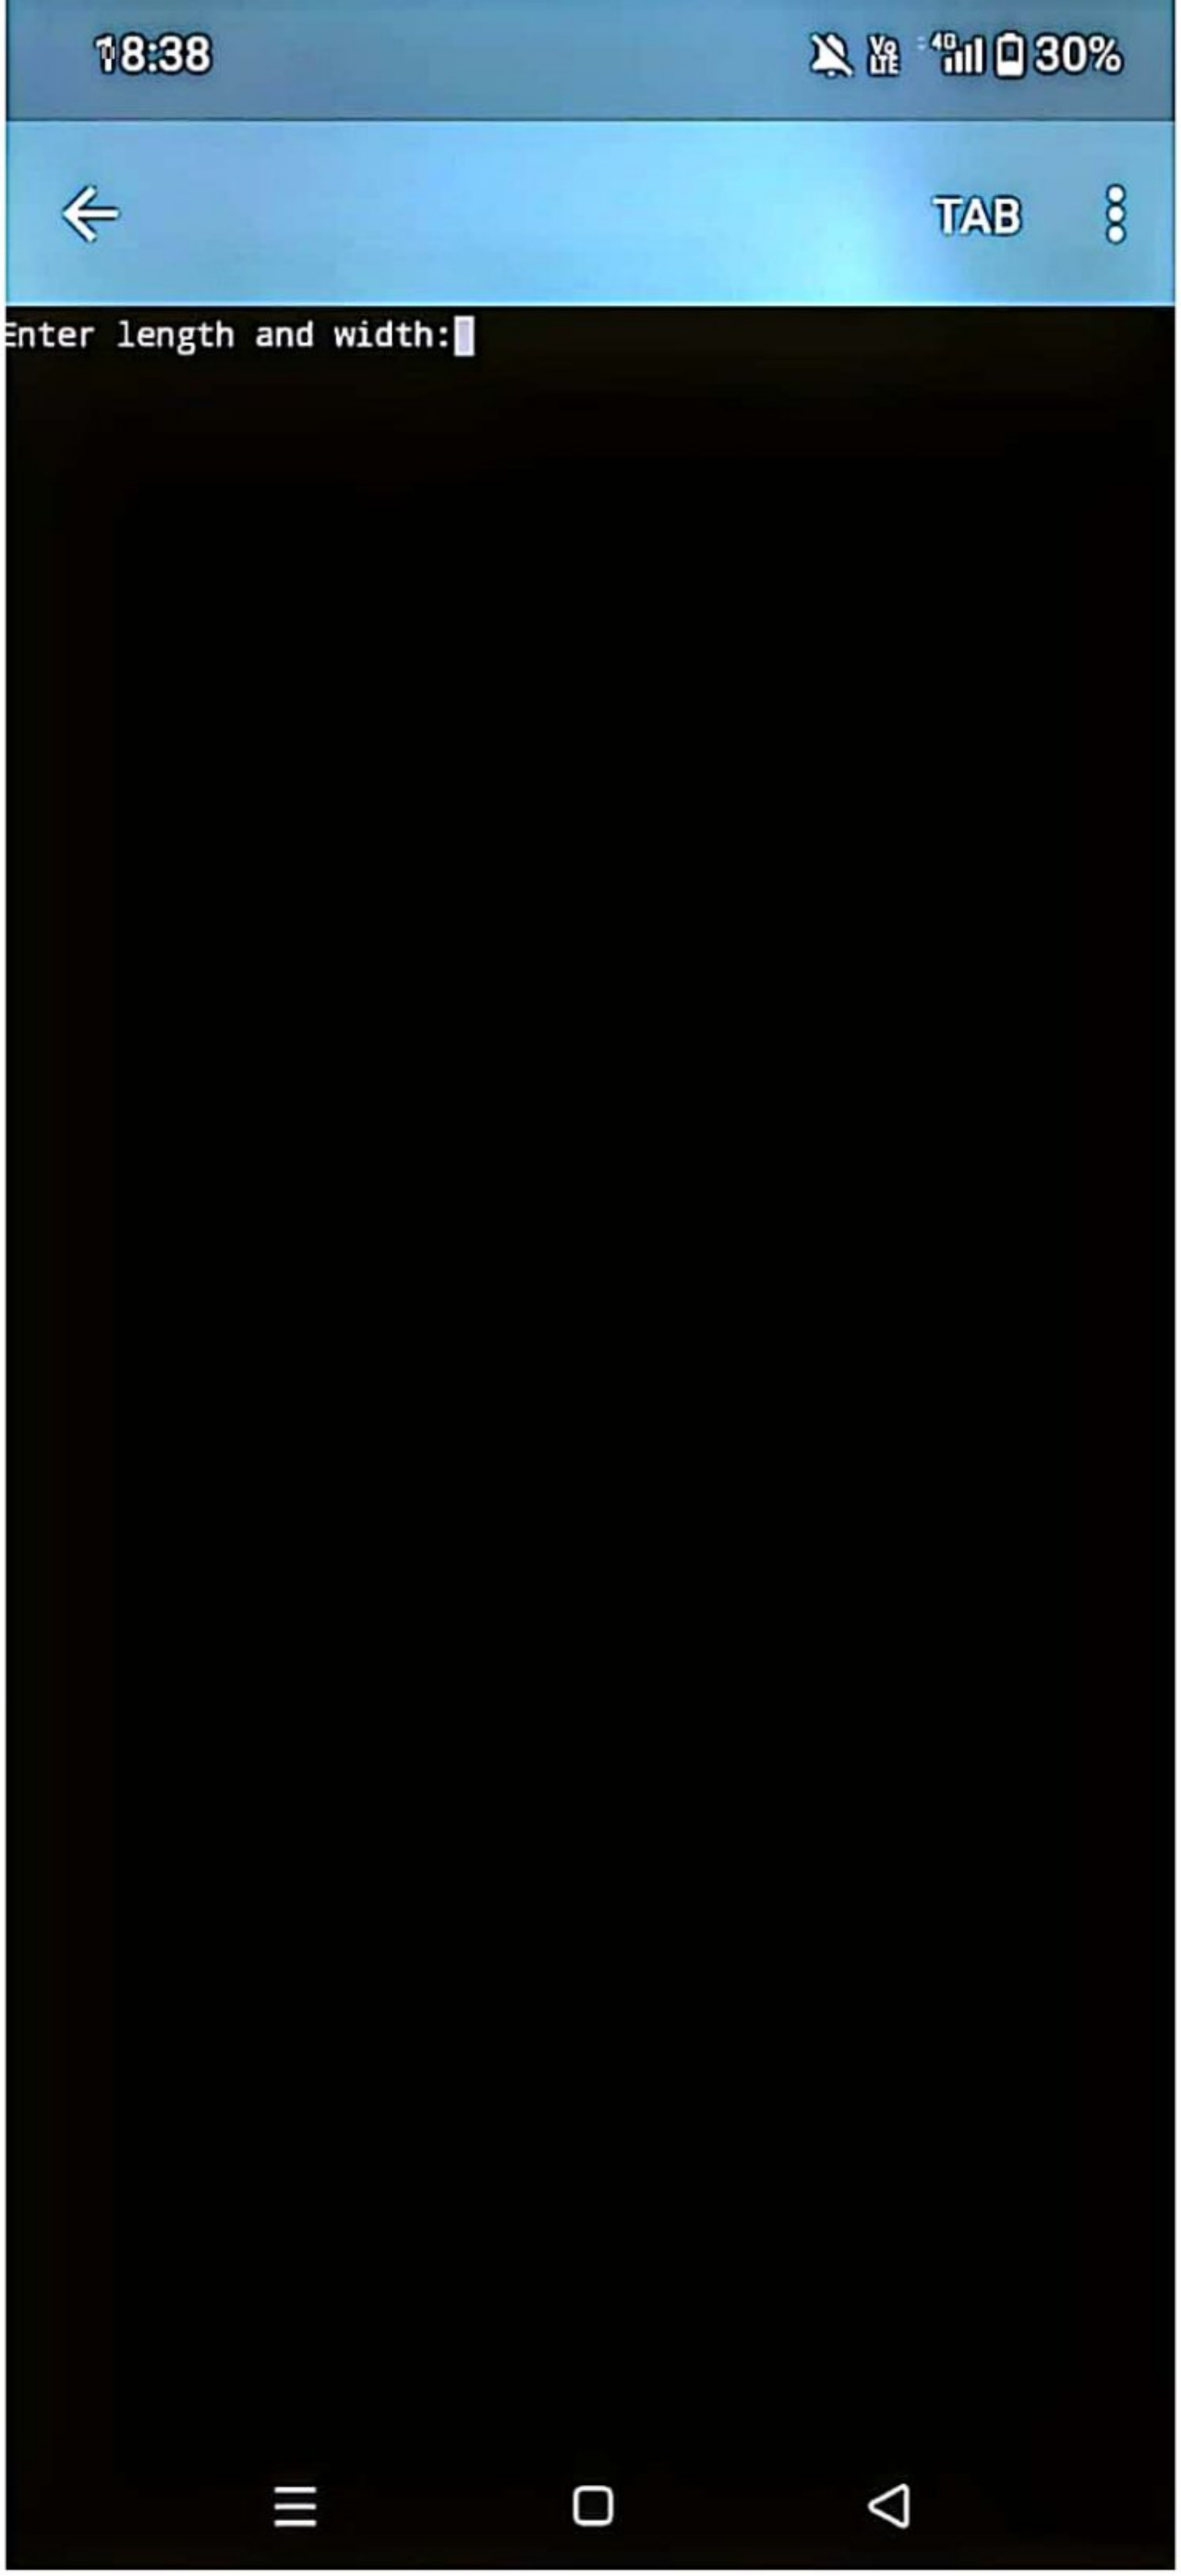

```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   float length, width,area;
6  cout<<"Enter length and width:";
7   cin >> length>>width;
8   area = length*width;
9   cout << "Area of Rectangle = " << area;
10  return 0;
11 }
12
13
14
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



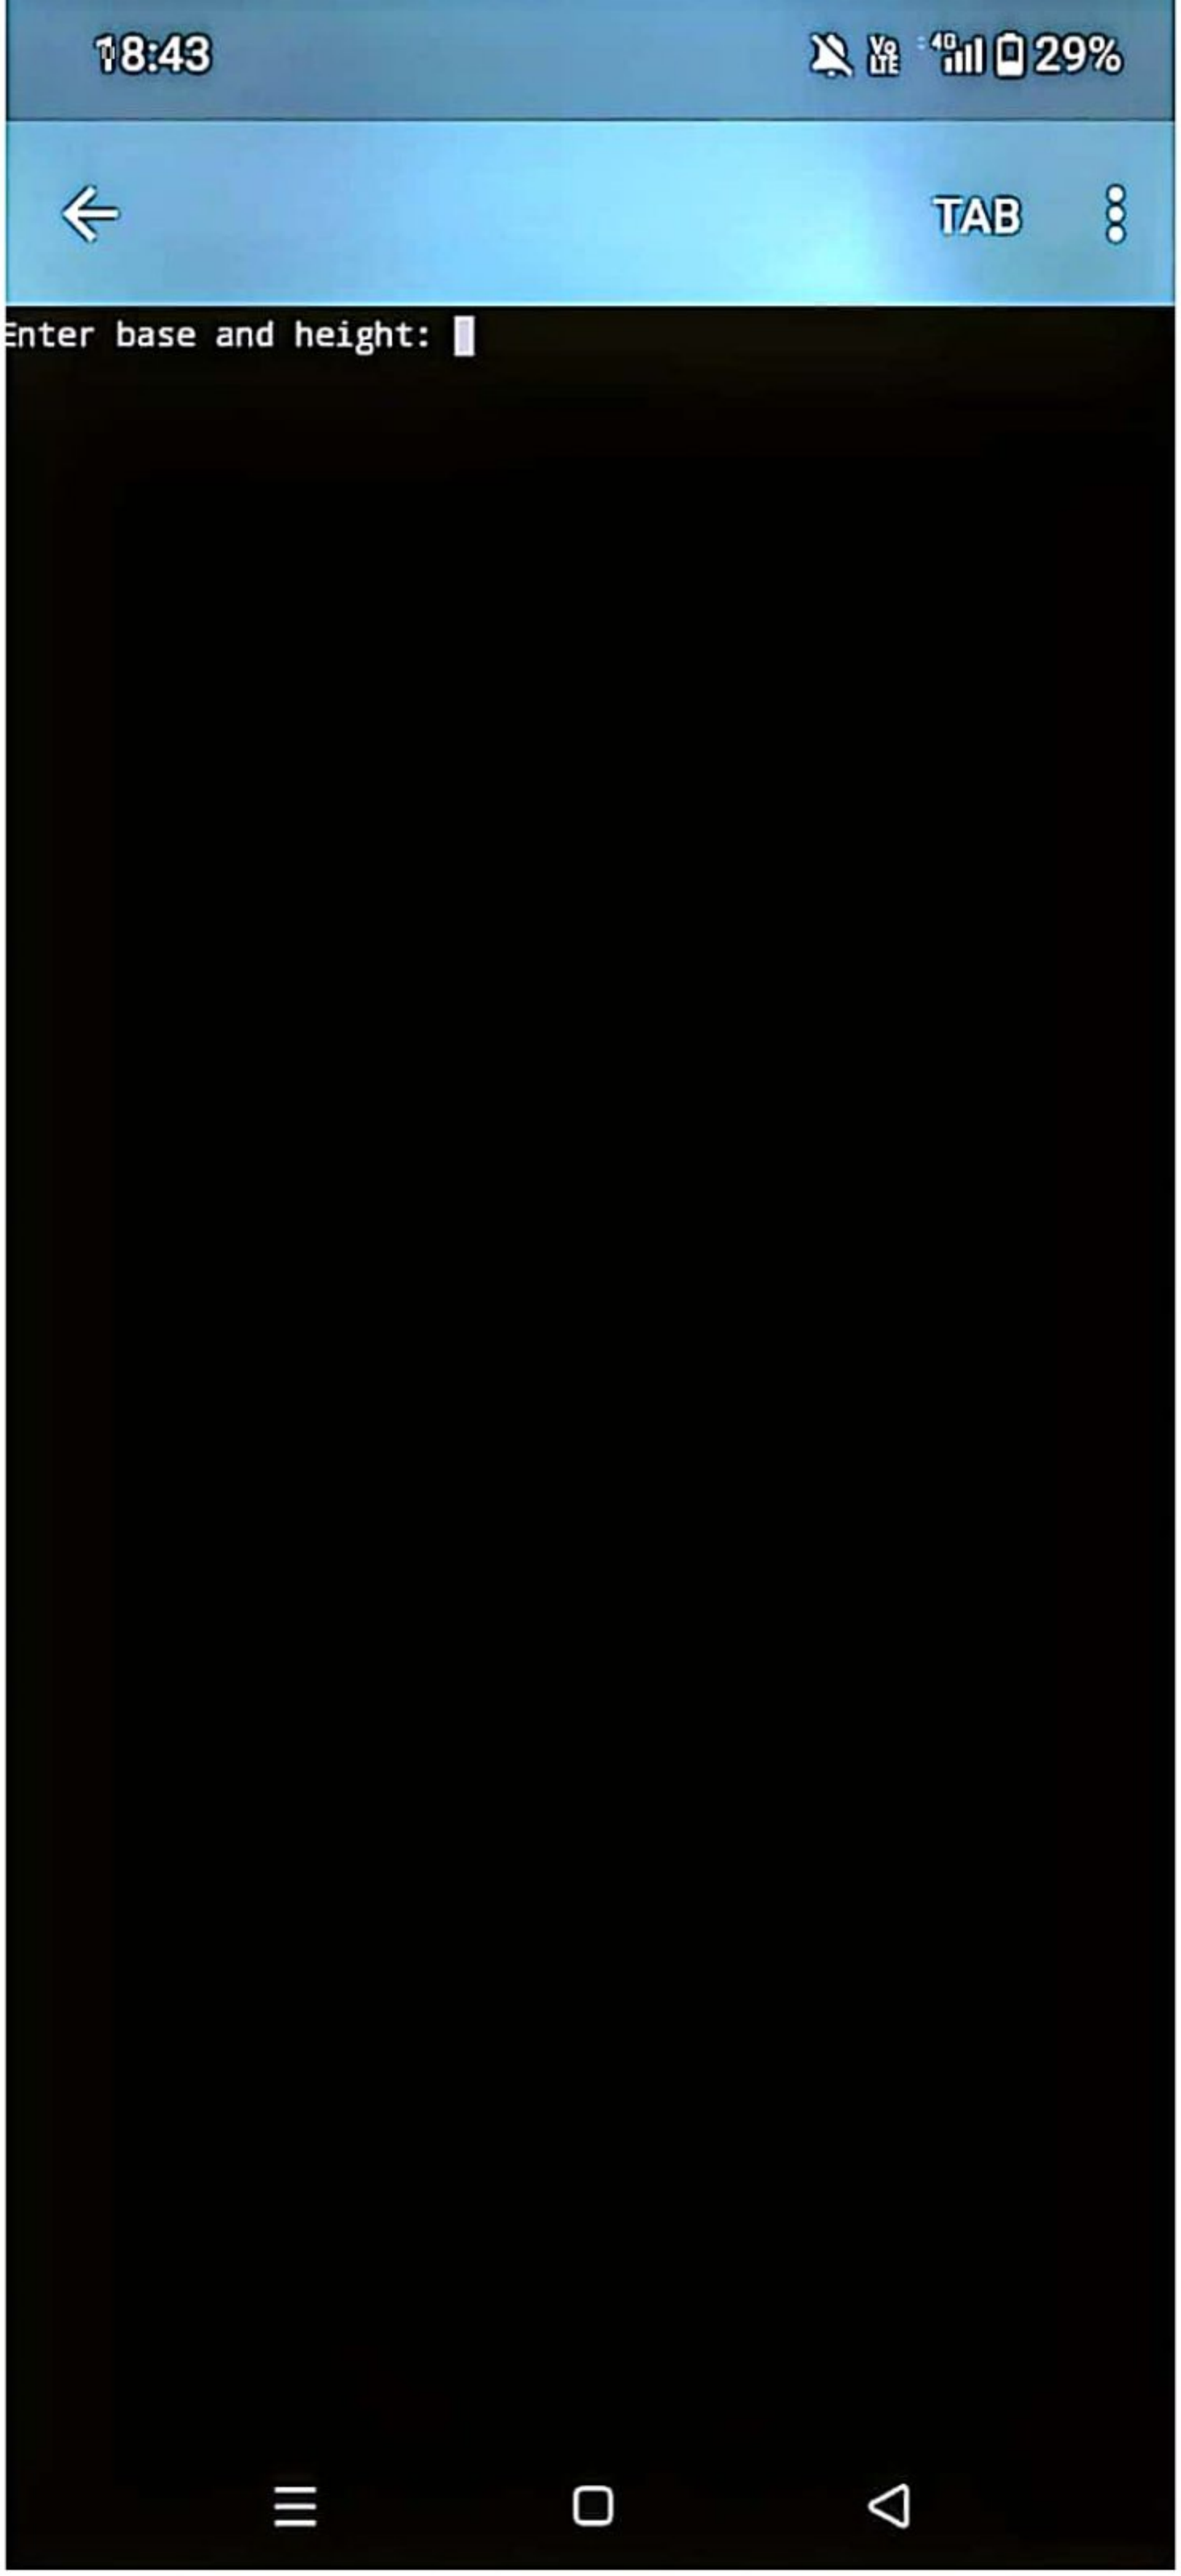

```
1  #include <iostream>
2  using namespace std;
3  int main(){
4   float base, height, area;
5   cout << "Enter base and height: ";
6   cin >> base >> height;
7   area = base * height * 0.5;
8   cout << "Area of Triangle = " << area;
9   return 0;
10 }
11
12
13
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner




```
1  #include <iostream>
2  using namespace std;
3  int main()
4   {
5   float item1=12.95, item2=24.95, item3=6.
   95, item4=14.95, item5=3.95;
6   float subtotal, tax, total;
7   subtotal = item1+item2+item3+item4+
   item5;
8   tax = subtotal * 0.06; // 6% tax
9   total = subtotal + tax;
10
11  cout << "Price of item 1 = $" << item1 <<
   endl;
12  cout << "Price of item 2 = $" << item2 <<
   endl;
13  cout << "Price of item 3 = $" << item3 <<
   endl;
14  cout << "Price of item 4 = $" << item4 <<
   endl;
15  cout << "Price of item 5 = $" << item5 <<
   endl;
16  cout << "Subtotal = $" << subtotal << endl;
17  cout << "Sales Tax (6%) = $" << tax << endl;

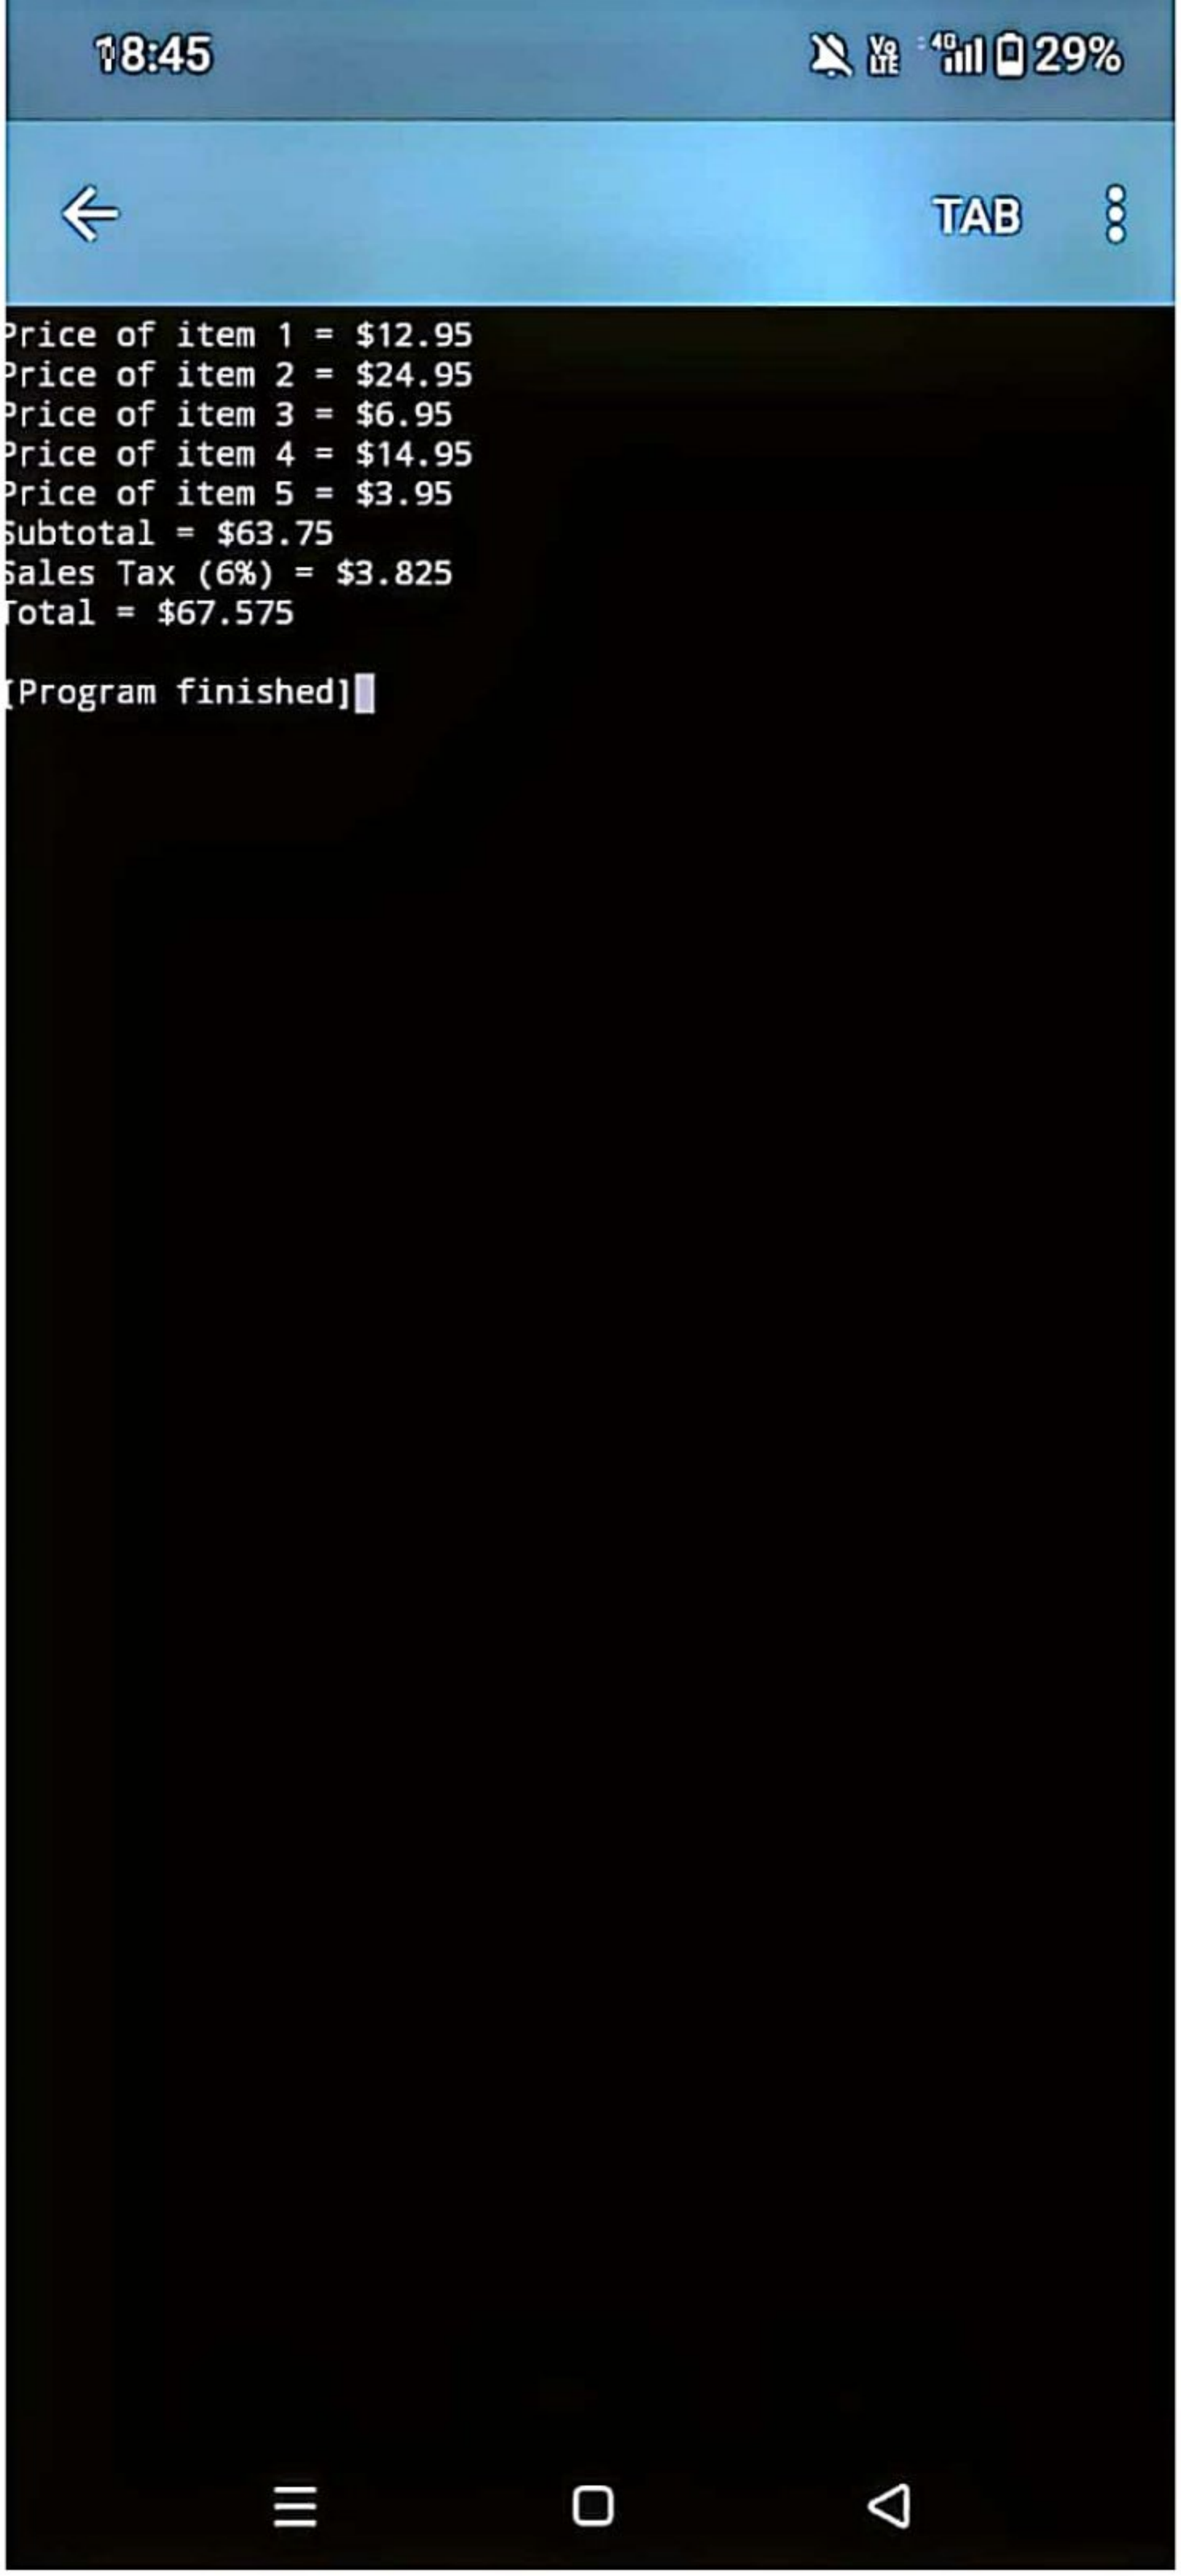
18  cout << "Total = $" << total << endl;
19  return 0;
20 }
21
22
23
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



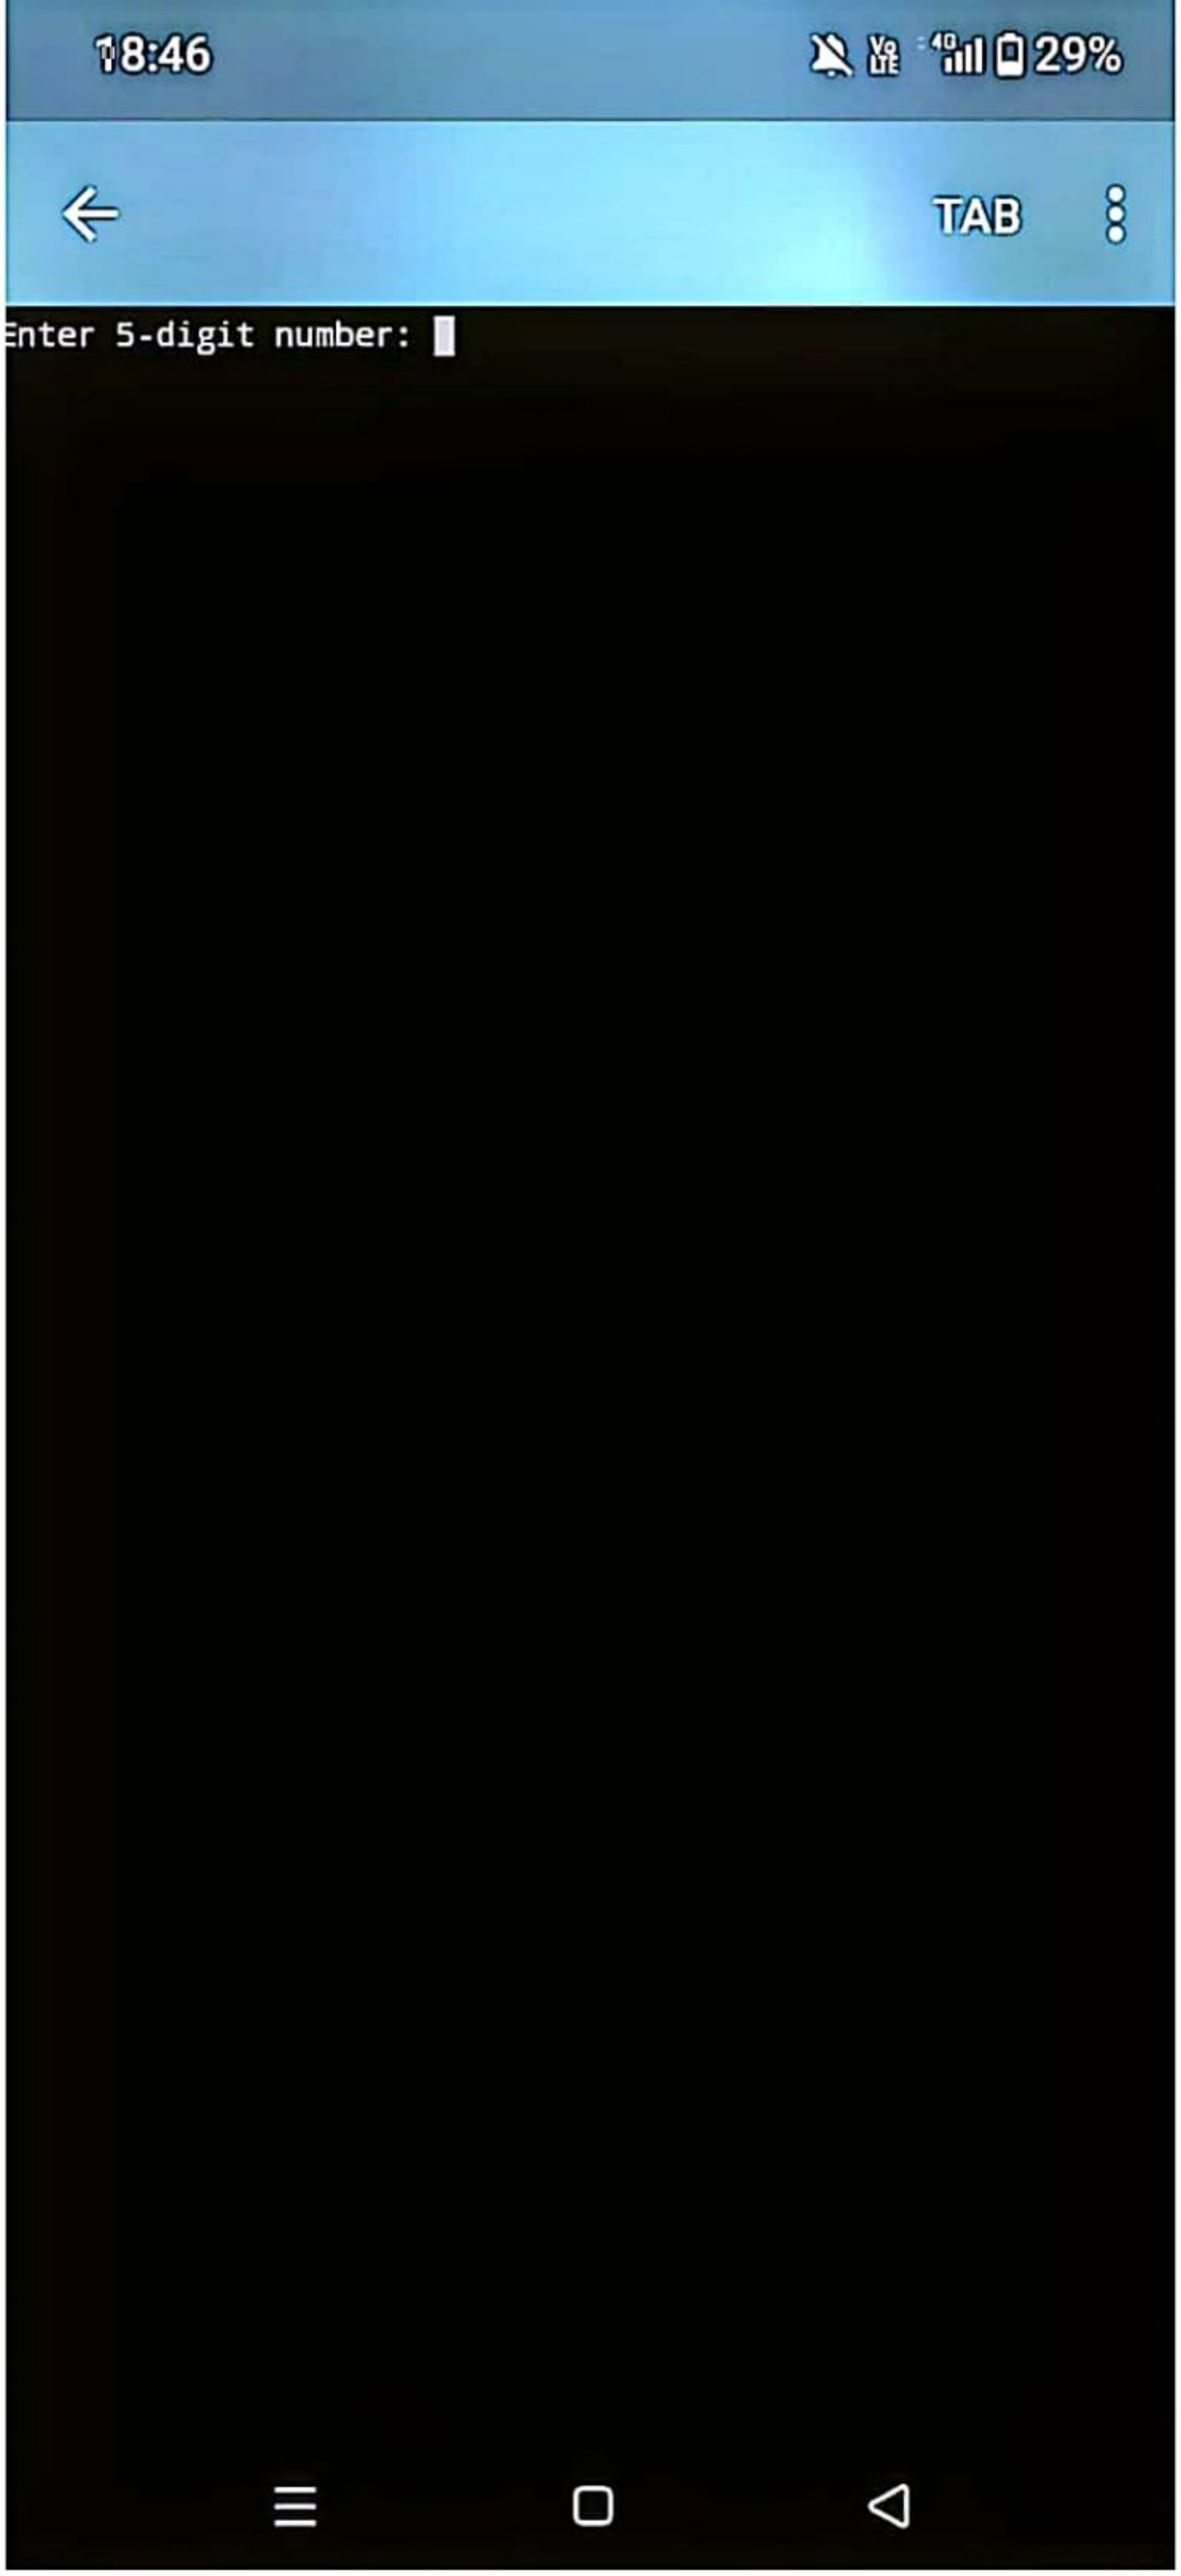

```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   int num;
6   cout << "Enter 5-digit number: ";
7   cin >> num;
8   cout << num/10000 << "   ";
9   cout << (num/1000)%10 << "   ";
10  cout << (num/100)%10 << "   ";
11  cout << (num/10)%10 << "   ";
12  cout << num%10;
13  return 0;
14 }
15
16
17
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



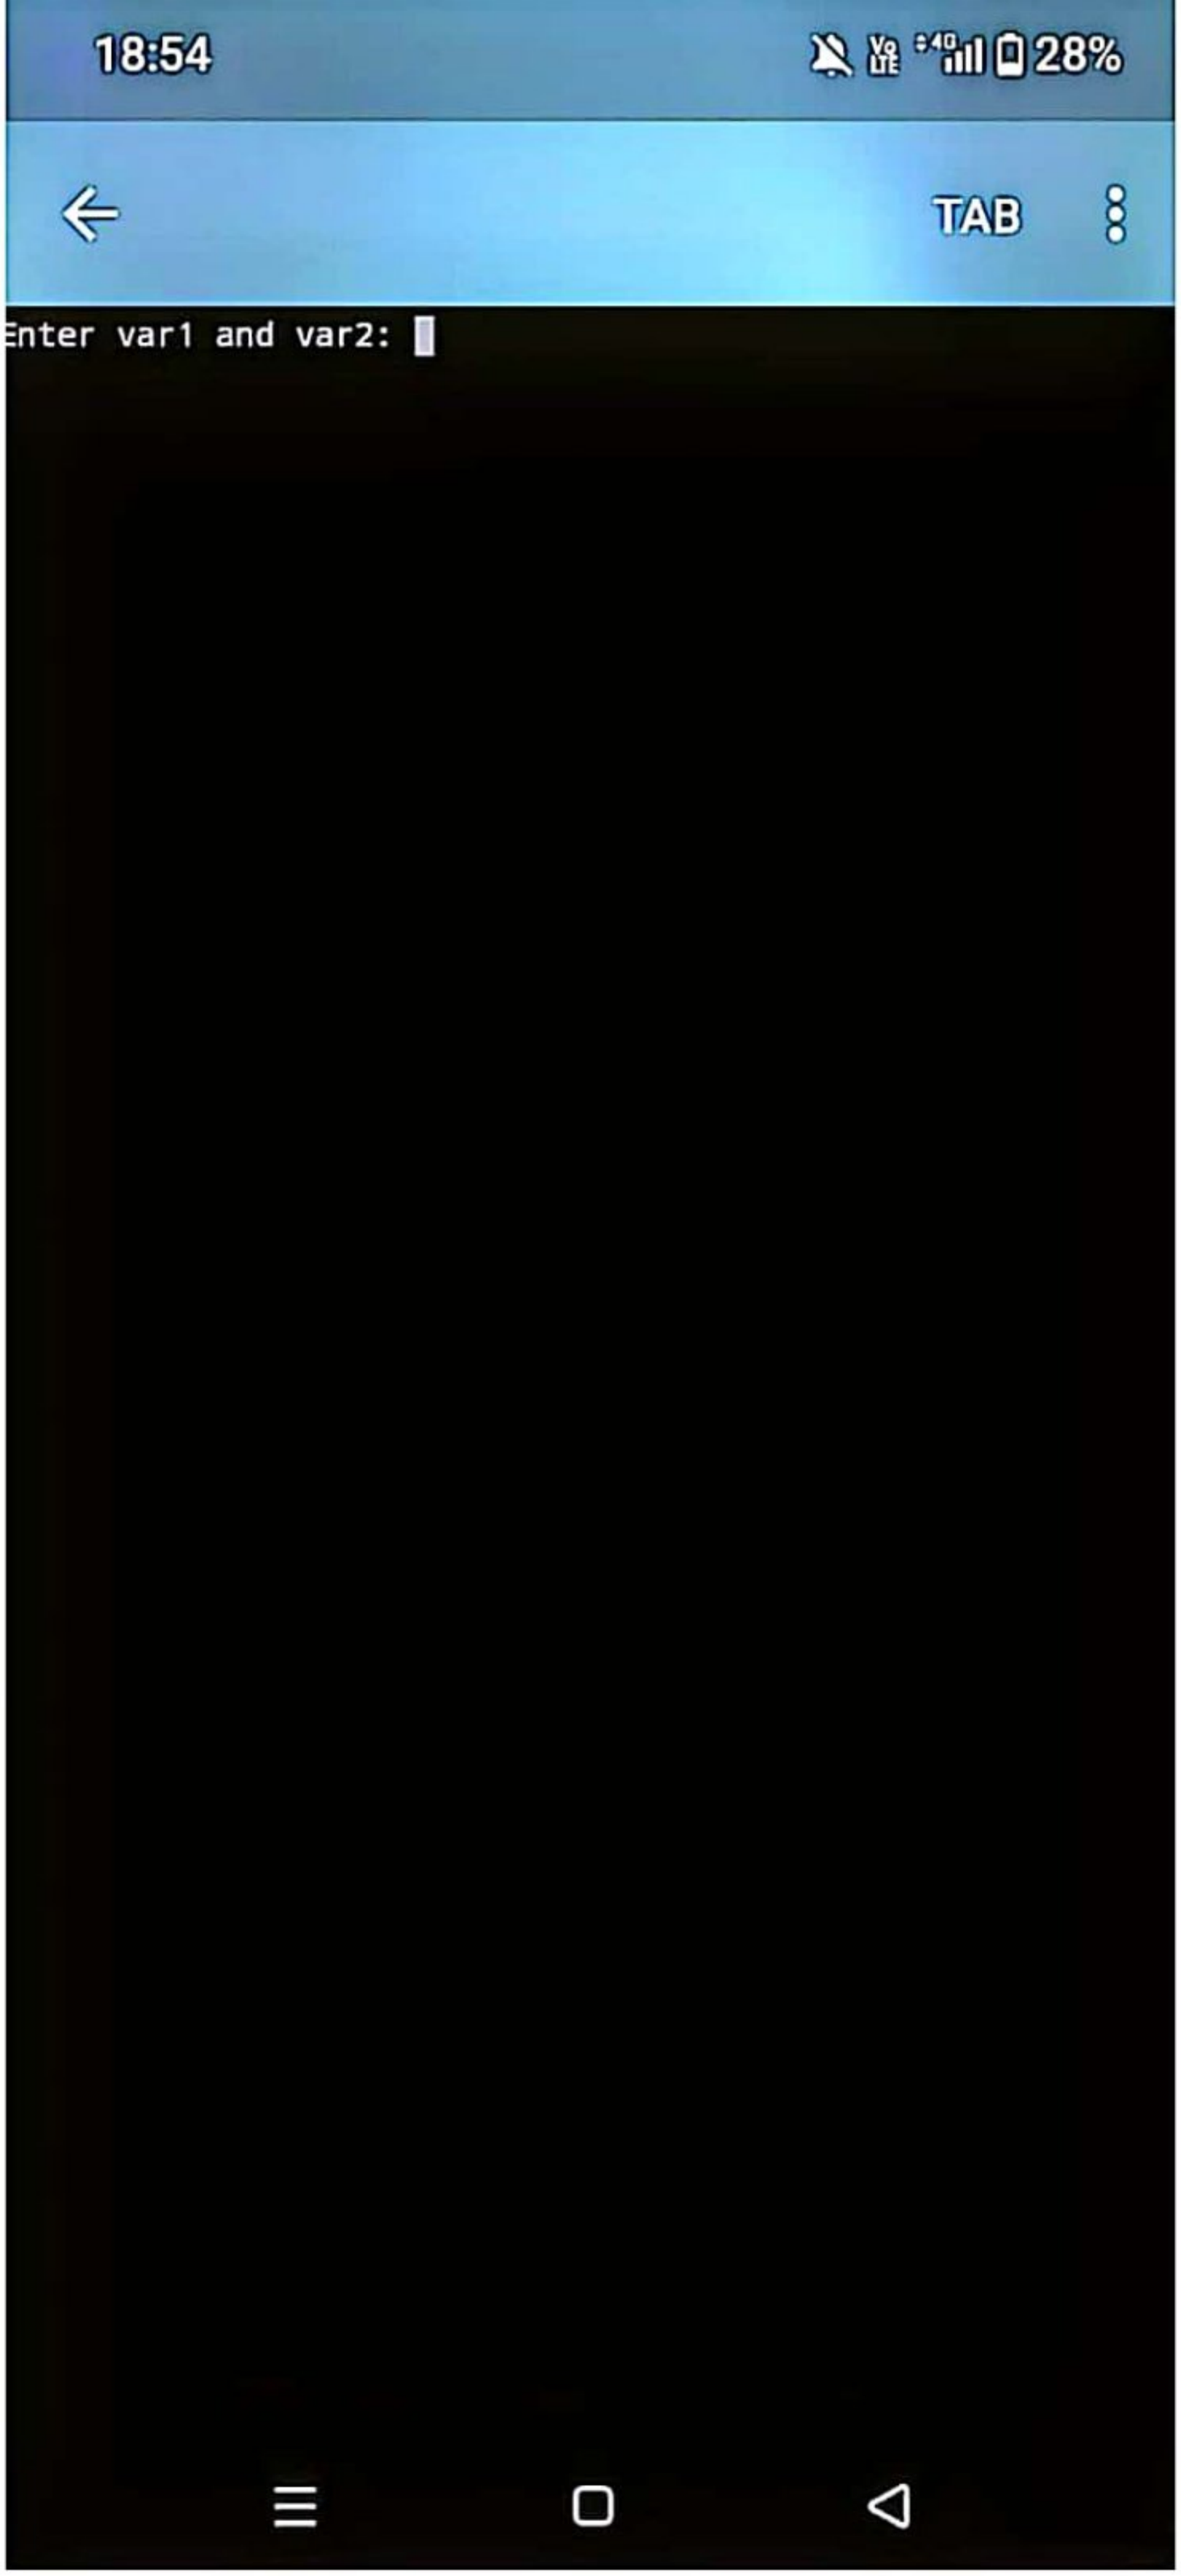

```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   int var1, var2, temp;
6   cout << "Enter var1 and var2: ";
7   cin >> var1 >> var2;
8   cout << "Before Swap: var1=" << var1 << "
   var2=" << var2 << endl;
9   // swapping
10  temp = var1;
11  var1 = var2;
12  var2 = temp;
13  cout << "After Swap: var1=" << var1 << "
   var2=" << var2 << endl;
14  return 0;
15 }
16
17
18
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



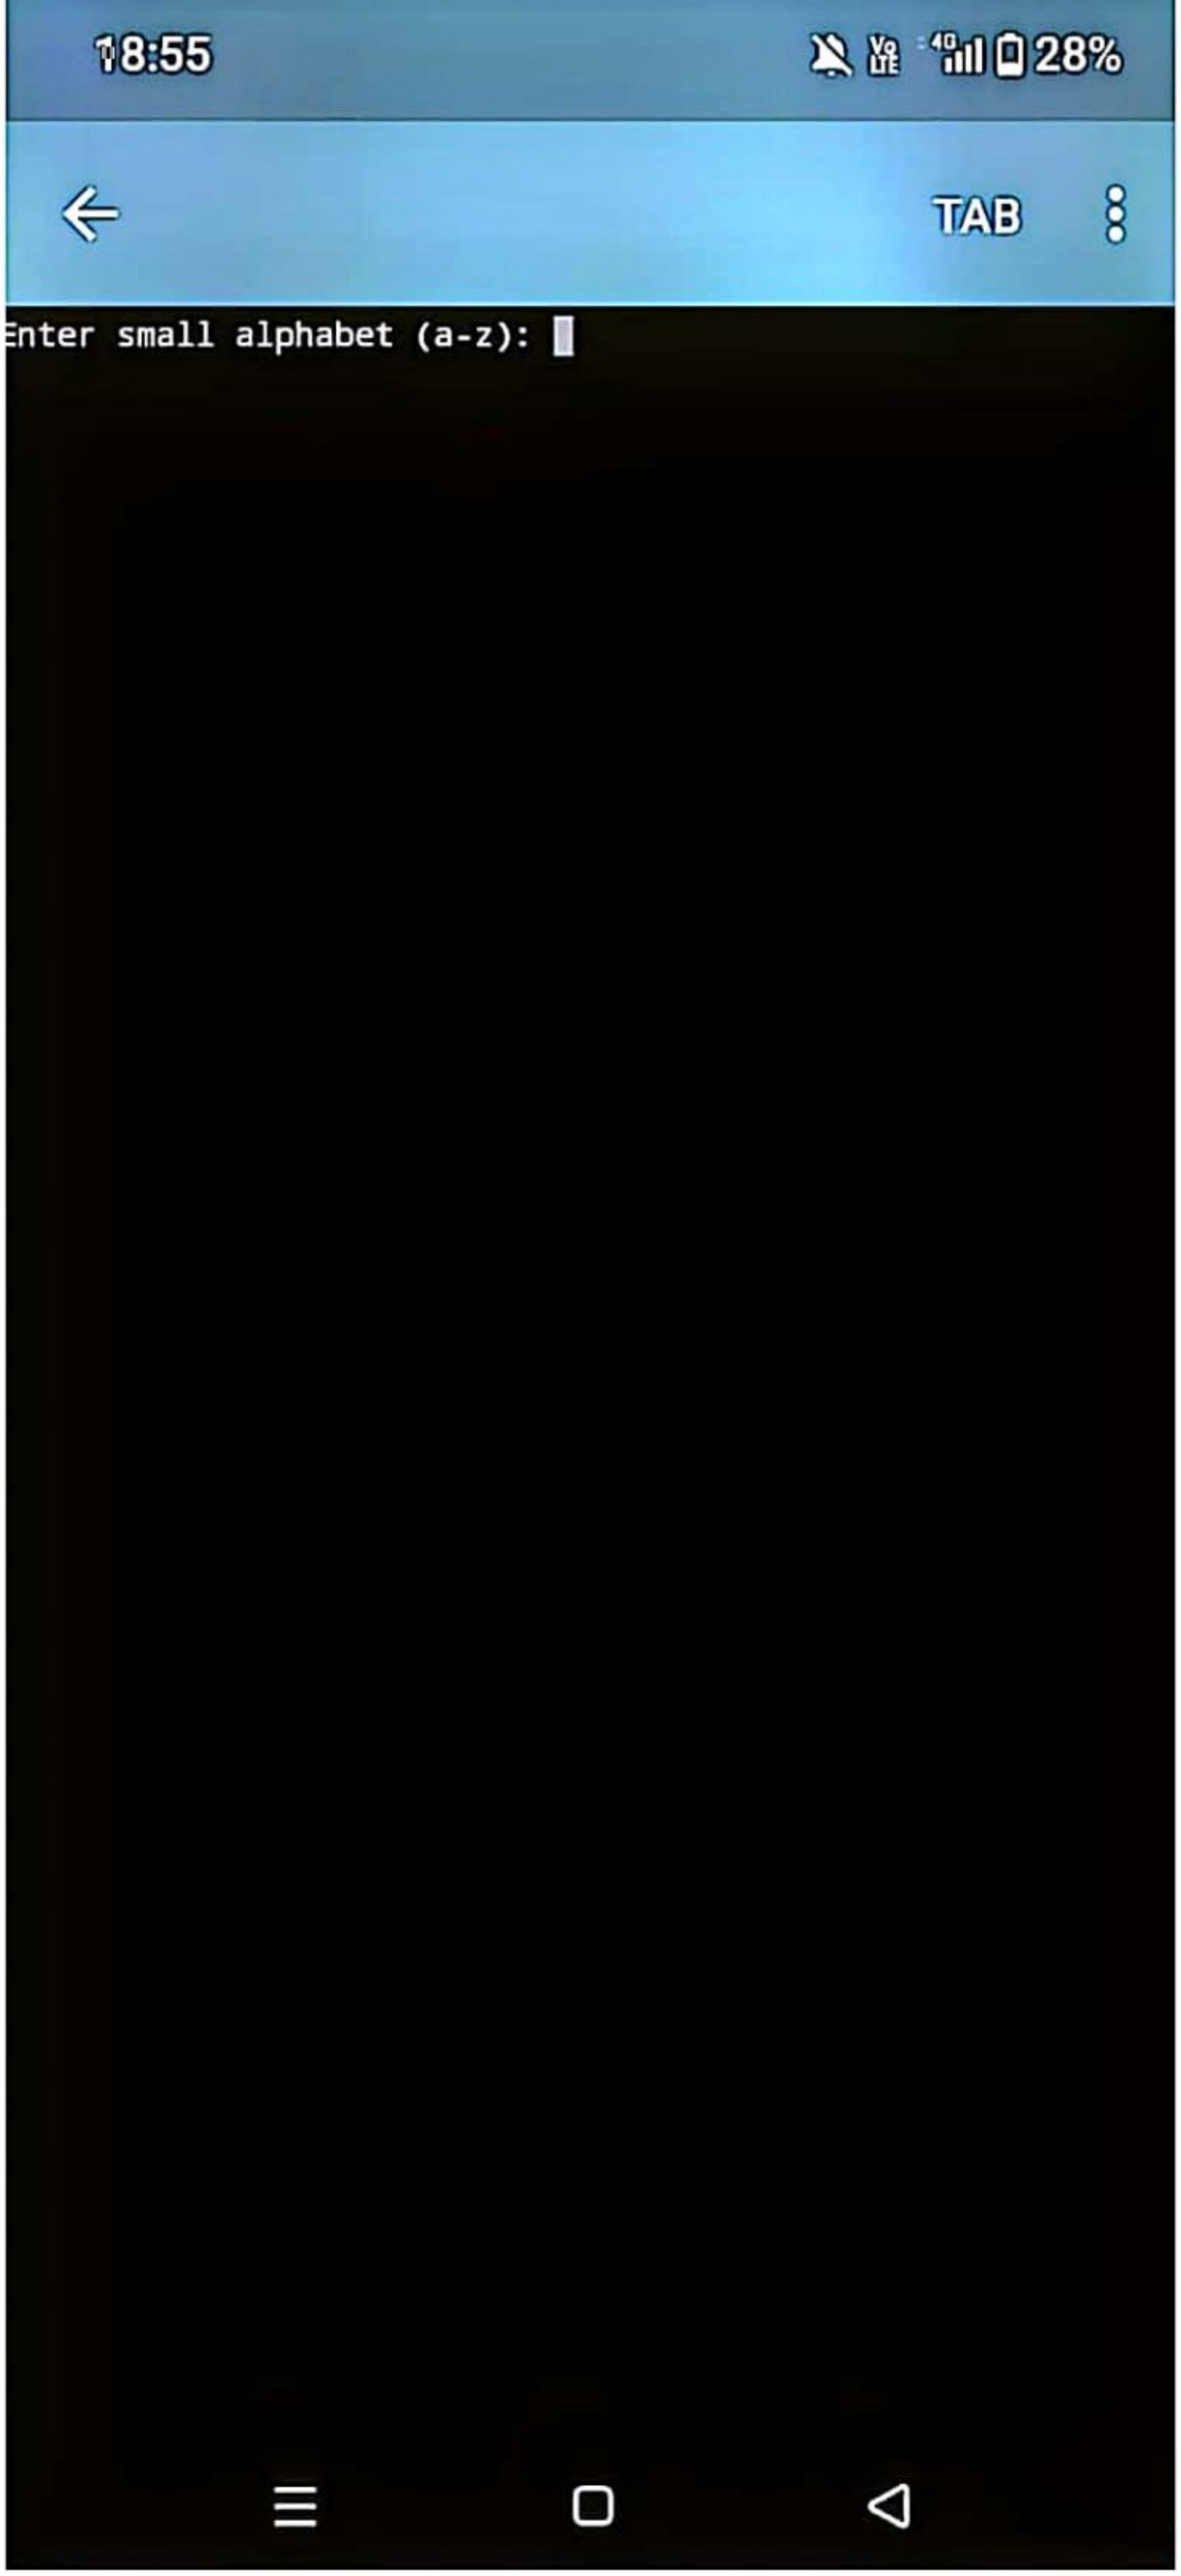

```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   char small;
6   cout << "Enter small alphabet (a-z): ";
7   cin >> small;
8   char capital = small - 32; // ASCII logic
9   cout << "Upper case = " << capital;
10  return 0;
11 }
12
13
14
```



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner



Scanned with CamScanner

Scanned with CamScanner

Scanned with CamScanner