

CSS_project

Design a Website like the one given below using CSS.

AIM

Design a Website like the one given below using CSS.

HTML PROGRAM

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>RoopTech</title>
  <link rel="stylesheet" href="roop.css">
</head>
<body>
  <header>
    <div class="container">
      <div class="logo">ROOPTECH</div>
      <nav>
        <ul>
          <li><a href="#">Home</a></li>
          <li><a href="#">Products</a></li>
          <li><a href="#">People</a></li>
          <li><a href="#">Contact</a></li>
        </ul>
      </nav>
      <div class="search">
        <input type="text" placeholder="Enter to Search">
        <button>Search</button>
      </div>
    </div>
  </header>
  <main>
    <div class="hero">
      <h1>"Driving progress through <br>brprecision engineering and <br>boundless c
      <div class="buttons">
        <button class="login">Log In</button>
        <button class="signup">Sign Up</button>
      </div>
    </div>
  </main>
  <footer>
    <p>DESIGNED AND DEVELOPED BY ROOP SAGAR S L (21223040175)</p>
  </footer>
</body>
</html>
```





```
/* styles.css */
```

```
body {  
  margin: 0;  
  font-family: Arial, sans-serif;  
  background-color: #000;  
  color: #fff;  
}
```

```
.container {  
  display: flex;  
  justify-content: space-between;  
  align-items: center;  
  padding: 20px;  
}
```

```
.logo {  
  font-size: 24px;  
  font-weight: bold;  
  color: #00f3ff;  
}
```

```
nav ul {  
  list-style-type: none;  
  margin: 0;  
  padding: 0;  
  display: flex;  
  gap: 20px;  
}
```

```
nav a {  
  color: #fff;  
  text-decoration: none;  
}
```

```
.search {  
  display: flex;  
  align-items: center;  
}
```

```
.search input {  
  padding: 5px;  
  border: none;  
  border-radius: 5px 0 0 5px;  
}
```

```
.search button {  
  padding: 6px 10px;  
  border: none;  
  border-radius: 0 5px 5px 0;  
  background-color: #00f3ff;  
  color: #000;  
  cursor: pointer;
```

```
}

.hero {
  text-align: center;
  padding: 100px 20px;
  background: linear-gradient(to bottom right, #000, #333);
}

.hero h1 {
  font-size: 36px;
  margin-bottom: 40px;
}

.buttons {
  display: flex;
  justify-content: center;
  gap: 20px;
}


button {
  padding: 10px 20px;
  border: none;
  border-radius: 5px;
  font-size: 16px;
  cursor: pointer;
}

.login {
  background-color: #f00;
  color: #fff;
}

.signup {
  background-color: #0f0;
  color: #fff;
}

footer {
  text-align: center;
  padding: 10px 0;
  background-color: #f00;
  color: #fff;
  position: fixed;
  width: 100%;
  bottom: 0;
}
```

OUTPUT

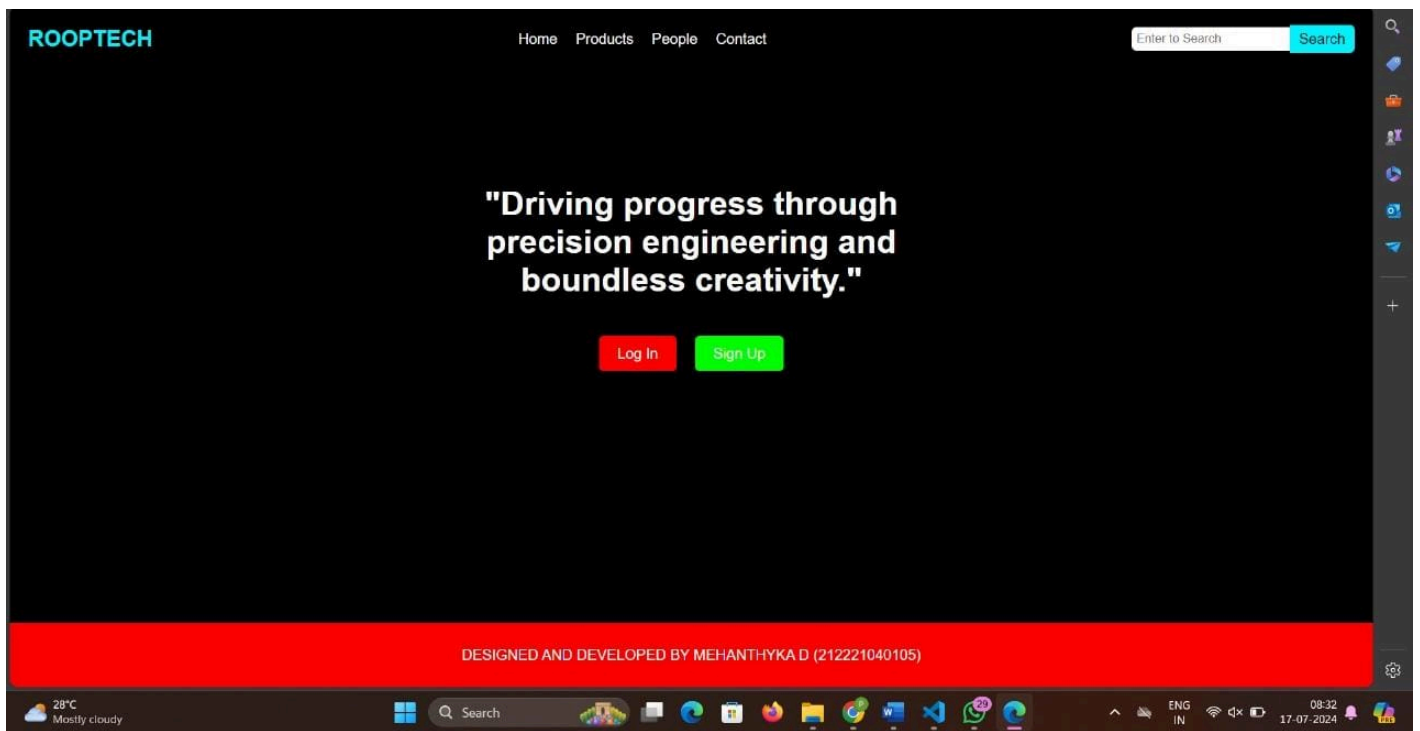

RESULT

Thus the program was executed successfully.