


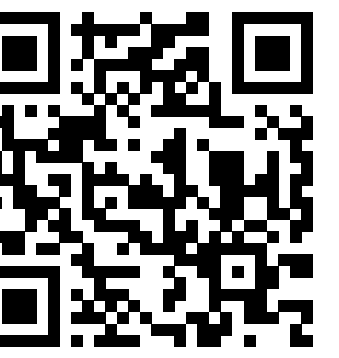


The problem

Epigenomic data form a three-dimensional tensor across assays, cell types and genomic positions, with tens to hundreds of assays and thousands of cell types. Due to the high cost and complexity of profiling every possible assay in all relevant cell and tissue types, this tensor is sparse: most experiments were never performed. Epigenome imputation methods aim to predict these missing experiments [1].

Key findings


- CANDI ranks **1st of 26** on the ENCODE Imputation Challenge.
- CANDI provides calibrated uncertainty estimates.
- CANDI's imputed signals and latent space predict gene expression.

CANDI schematic workflow

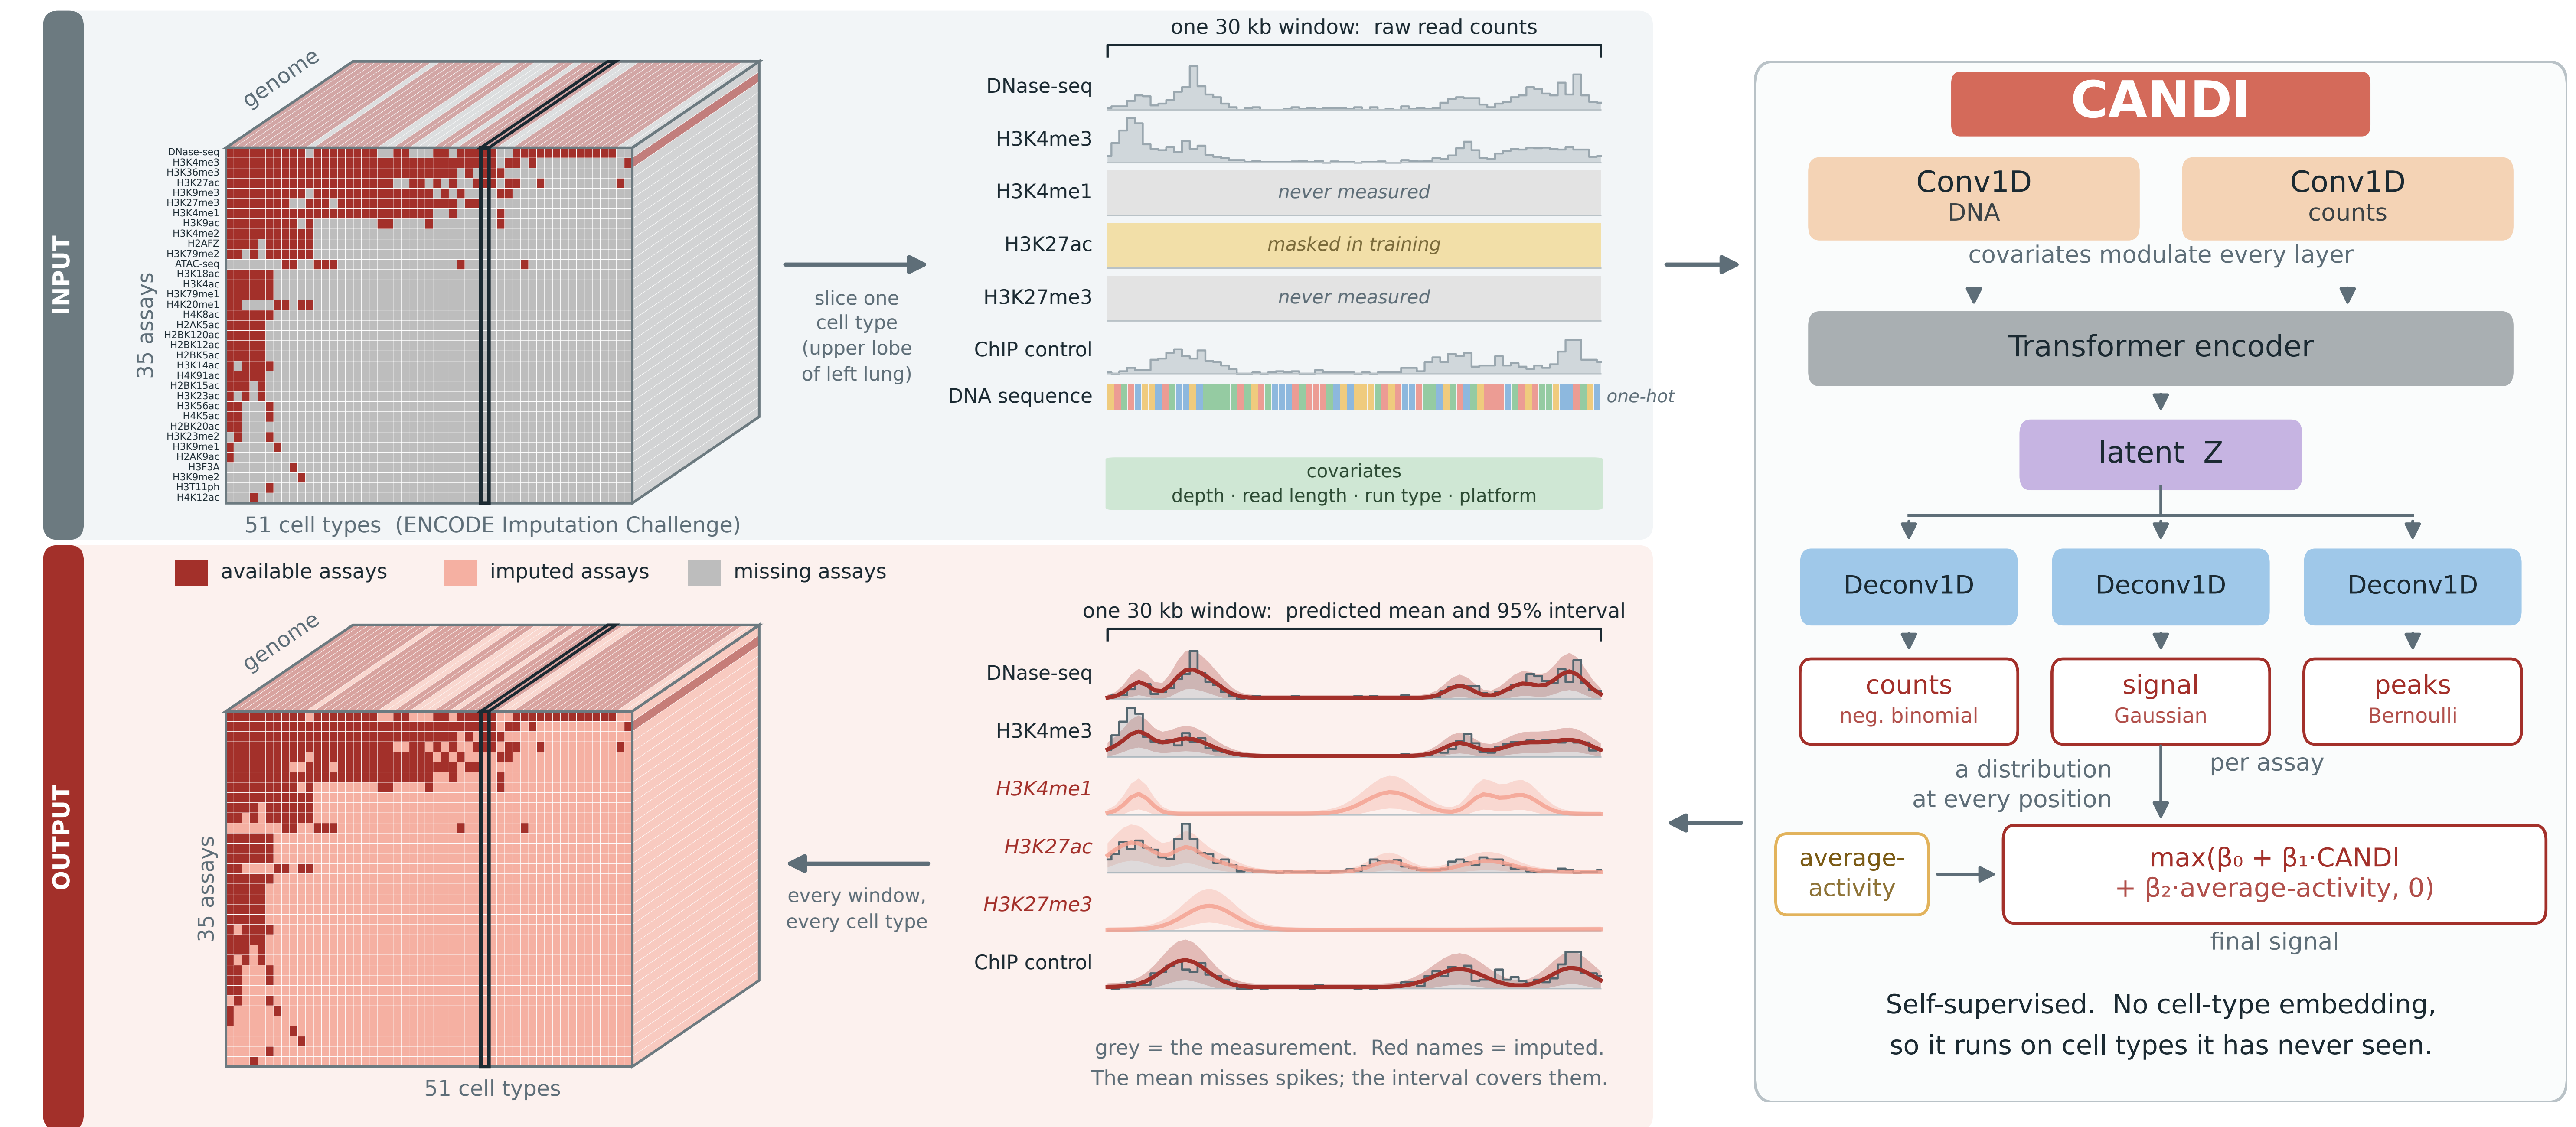

Top: for each 30 kb locus, CANDI takes observed read counts with the ChIP-seq control, four covariates per assay and the DNA sequence; grey assays were never measured, yellow ones are masked. **Bottom:** each output is a probability distribution, here a mean and 95% interval per assay; window by window, they fill every missing thread of the tensor.


Fixing the train-test experimental covariate shift in the ENCODE Imputation Challenge

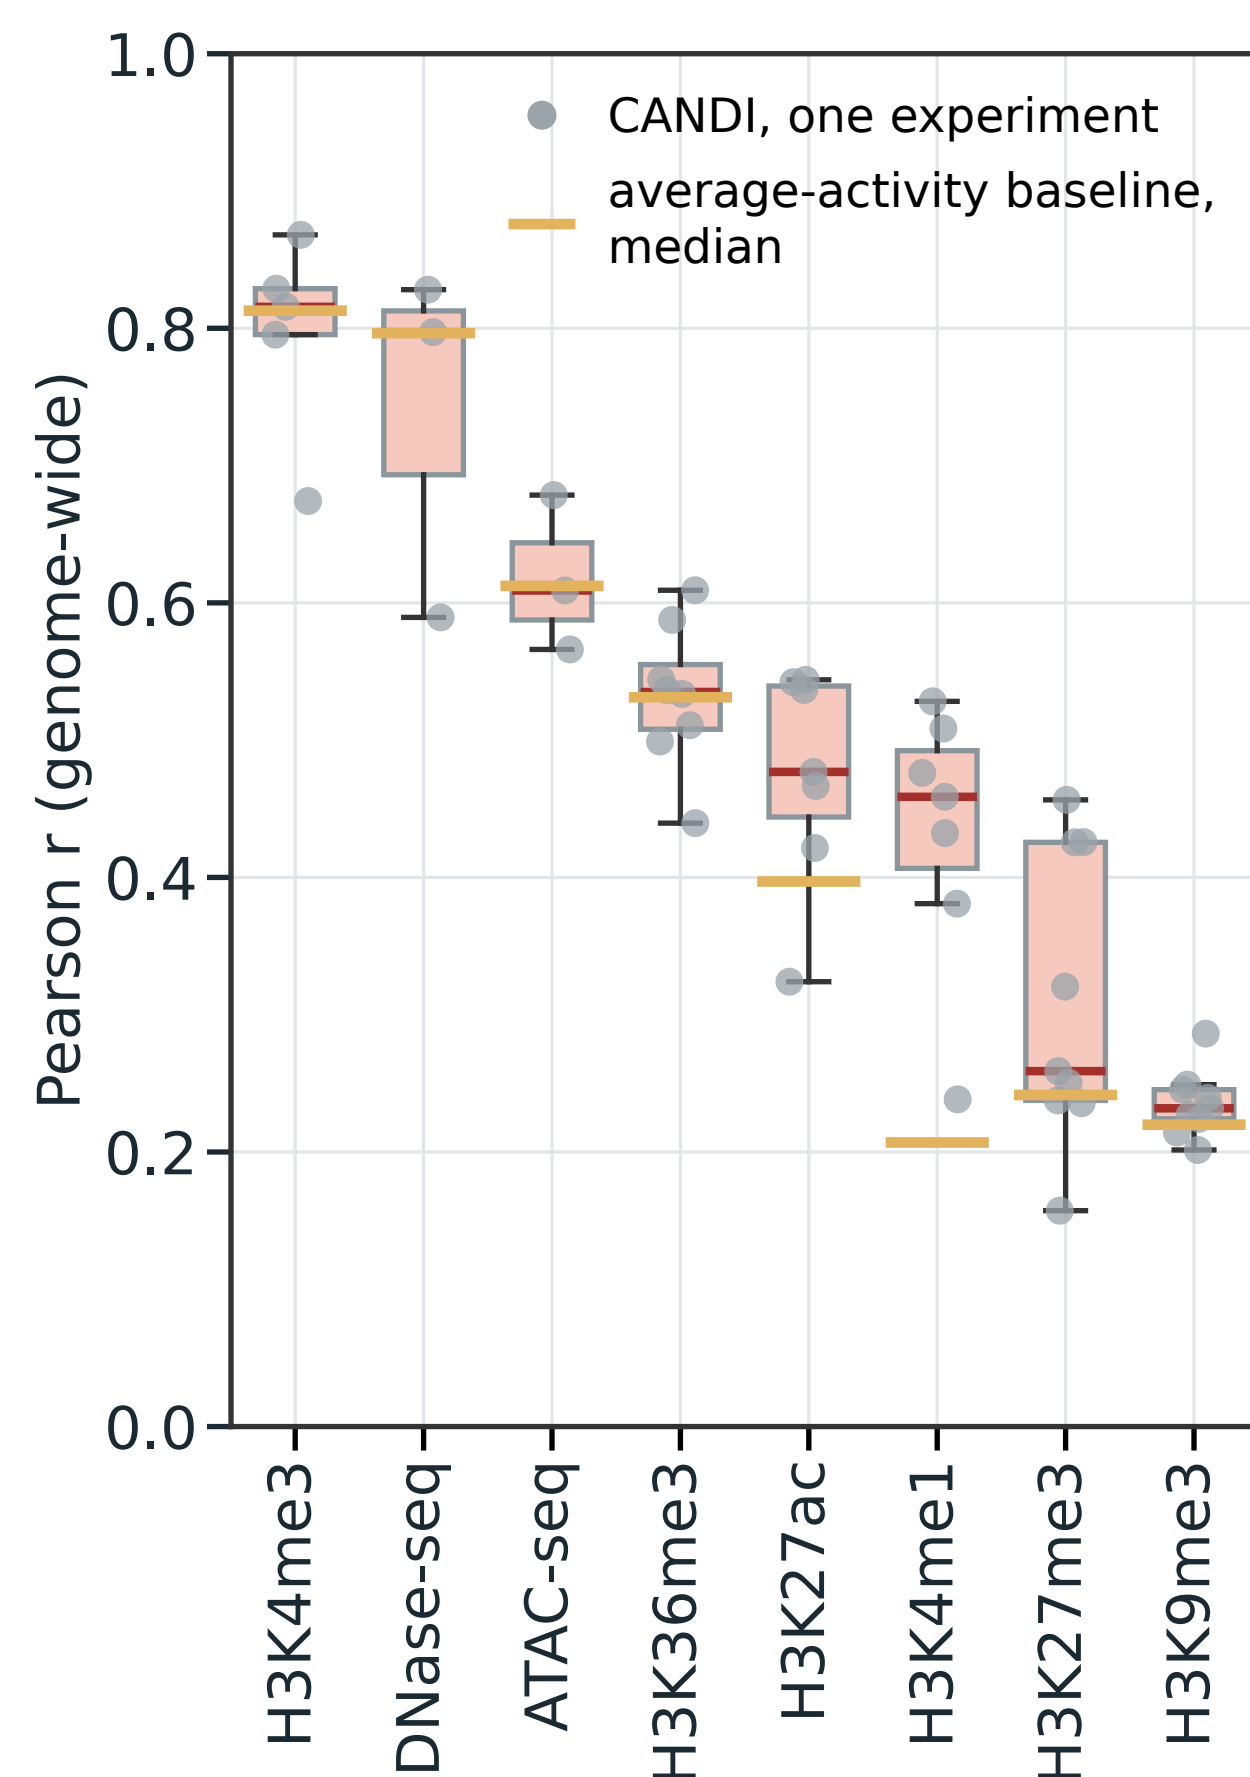

- 1 CANDI
- 2 HLYG v1
- 3 Lavawizard
- 4 average-activity baseline
- 5 Guacamole
- 6 imp
- 7 BrokenNodes_v3
- 8 imp1
- 9 HLYG
- 10 CUWA
- 11 LiPingChun
- 12 CUImp1
- 13 Song Lab 3
- 14 ICU
- 15 BrokenNodes
- 16 Song Lab
- 17 BrokenNodes_v2
- 18 CostaLab
- 19 HLYG v2
- 20 UIOWA Michaelson
- 21 NittanyLions2
- 22 NittanyLions
- 23 Aug2019Imp.
- 24 KKT-ENCODE
- 25 Avocado
- 26 Song Lab 2


A Genome-wide Pearson r of CANDI against each of the 51 blind-test experiments, by assay. Mustard bars: the average-activity baseline's median.

B The leaderboard with CANDI added: CANDI is first at 0.179 (bootstrap range 0.177–0.184), the next entry 0.306.

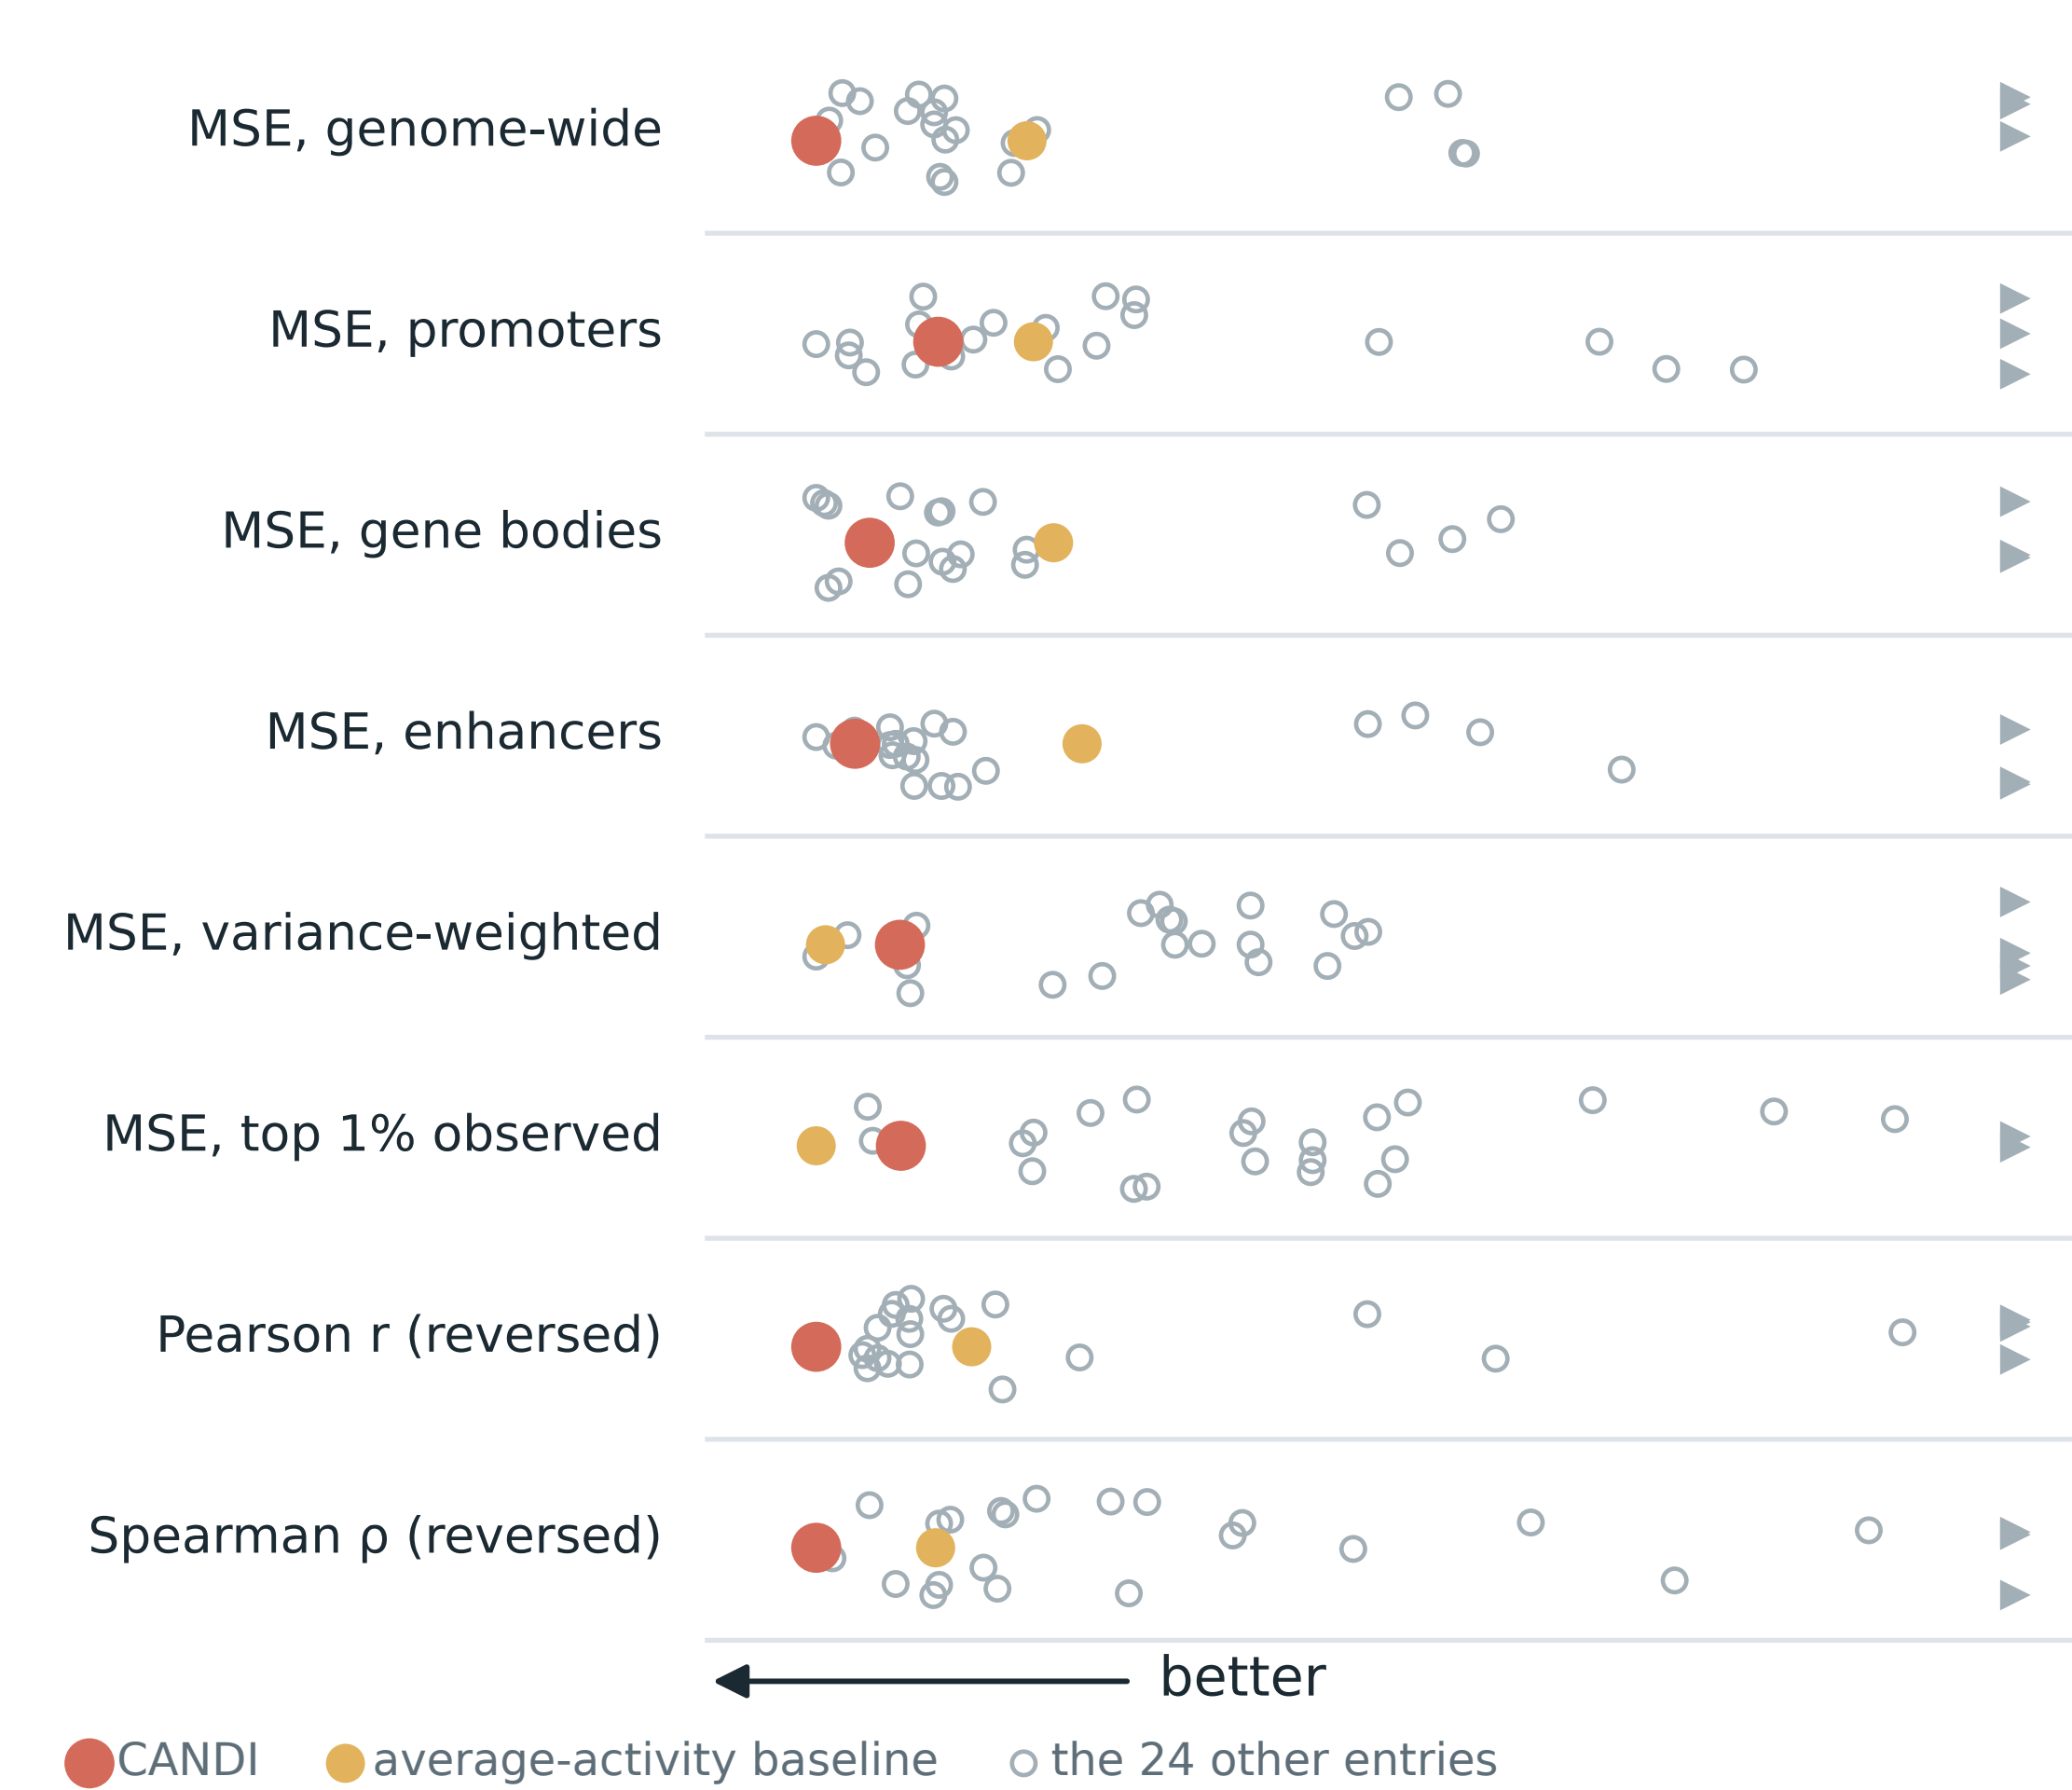


C Eight of the nine measures relative to the baseline, median over 51 experiments. CANDI is first on three and top 8 on the rest.

Downstream utility of CANDI

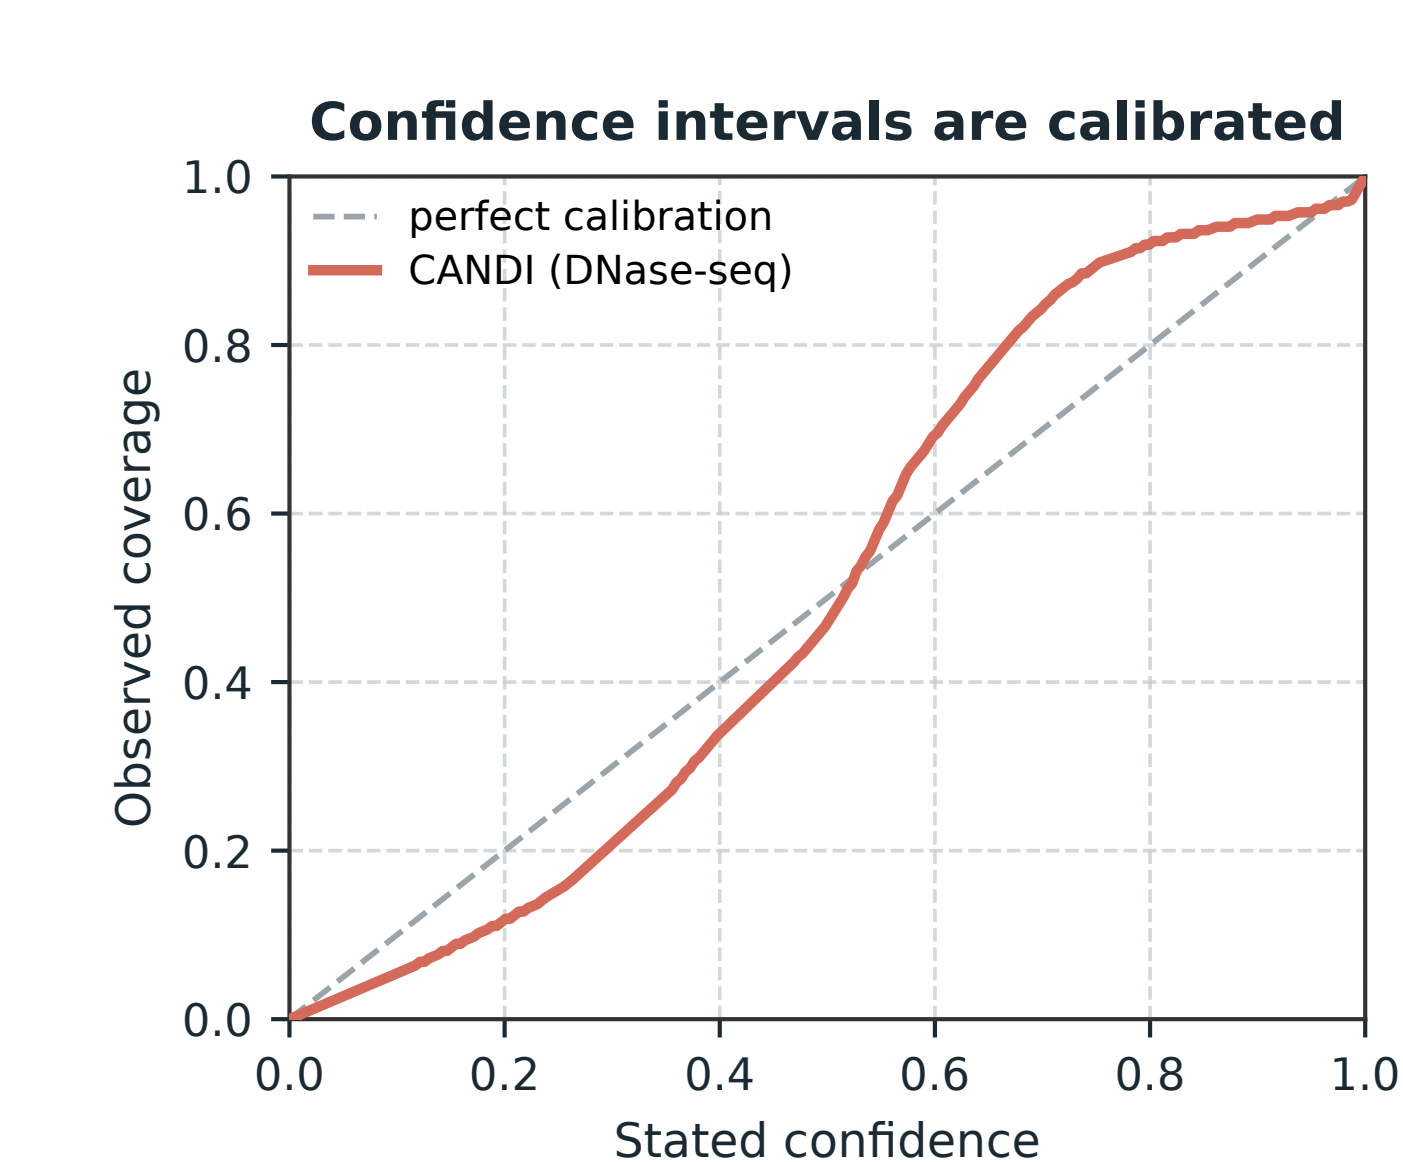

D Confidence calibration for DNase-seq (DND-41): predicted confidence level against the fraction of observed data within that interval.

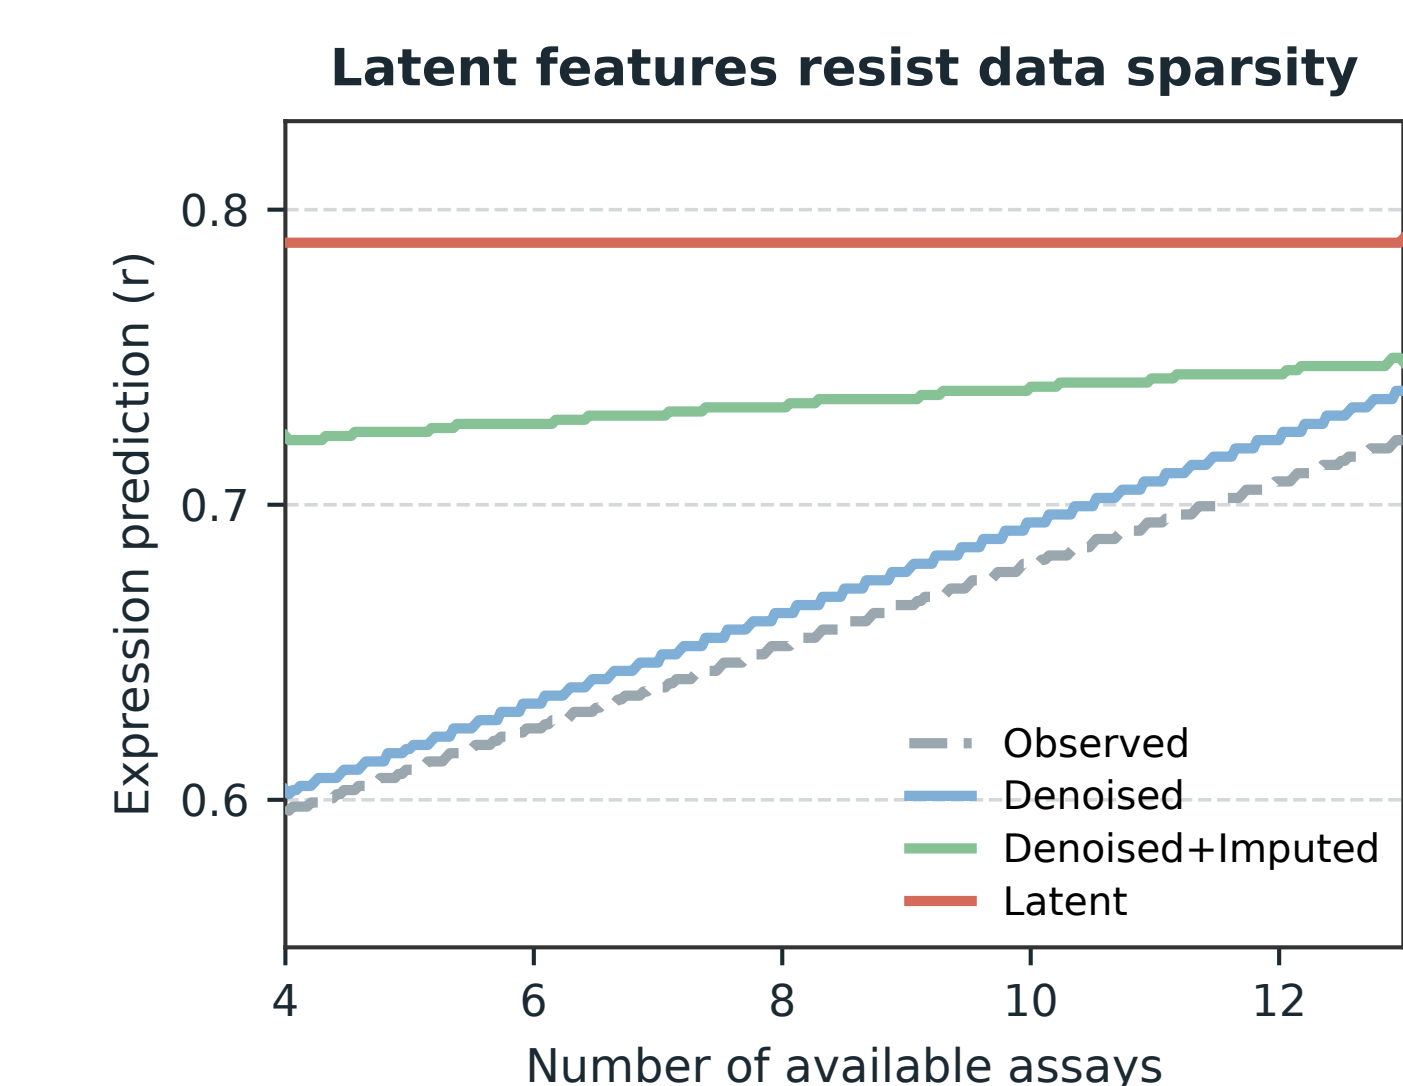

E Gene expression prediction as input assays are removed. Denoised+Imputed and Latent settings are robust to input sparsity.