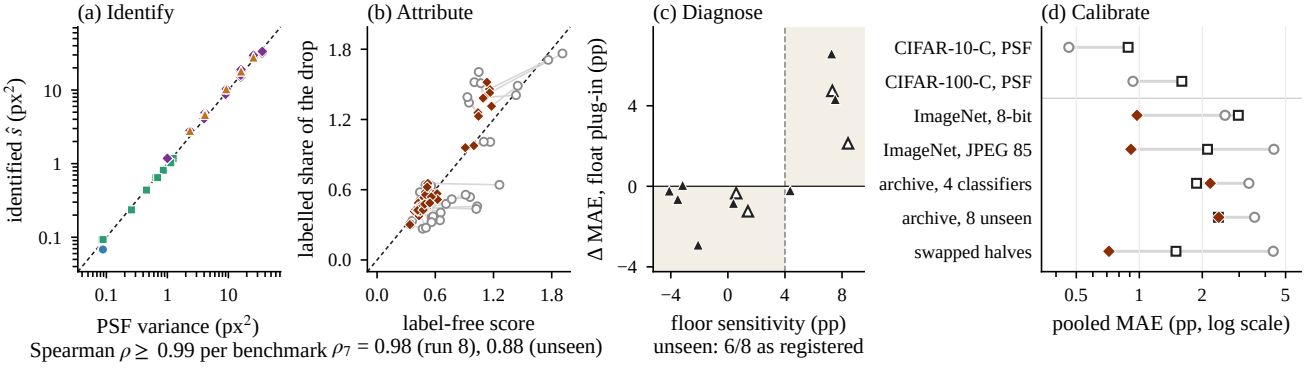
(a) Identify
identified $\hat{s}$ (px^2)
PSF variance (px^2)
(b) Attribute
labelled share of the drop
label-free score
(c) Diagnose
Δ MAE, float plug-in (pp)
floor sensitivity (pp)
(d) Calibrate
CIFAR-10-C, PSF
CIFAR-100-C, PSF
ImageNet, 8-bit
ImageNet, JPEG 85
archive, 4 classifiers
archive, 8 unseen
swapped halves
pooled MAE (pp, log scale)
Spearman $\rho \geq$ 0.99 per benchmark ρ_7 = 0.98 (run 8), 0.88 (unseen)
unseen: 6/8 as registered
CIFAR-10-C
CIFAR-100-C
ImageNet-C
ImageNet-C archive
storage-matched: φ_7, X@$\hat{s}$
floating point: φ, X@$\hat{s}$
unseen classifier (v8)
classifier of runs 7–8
strongest published