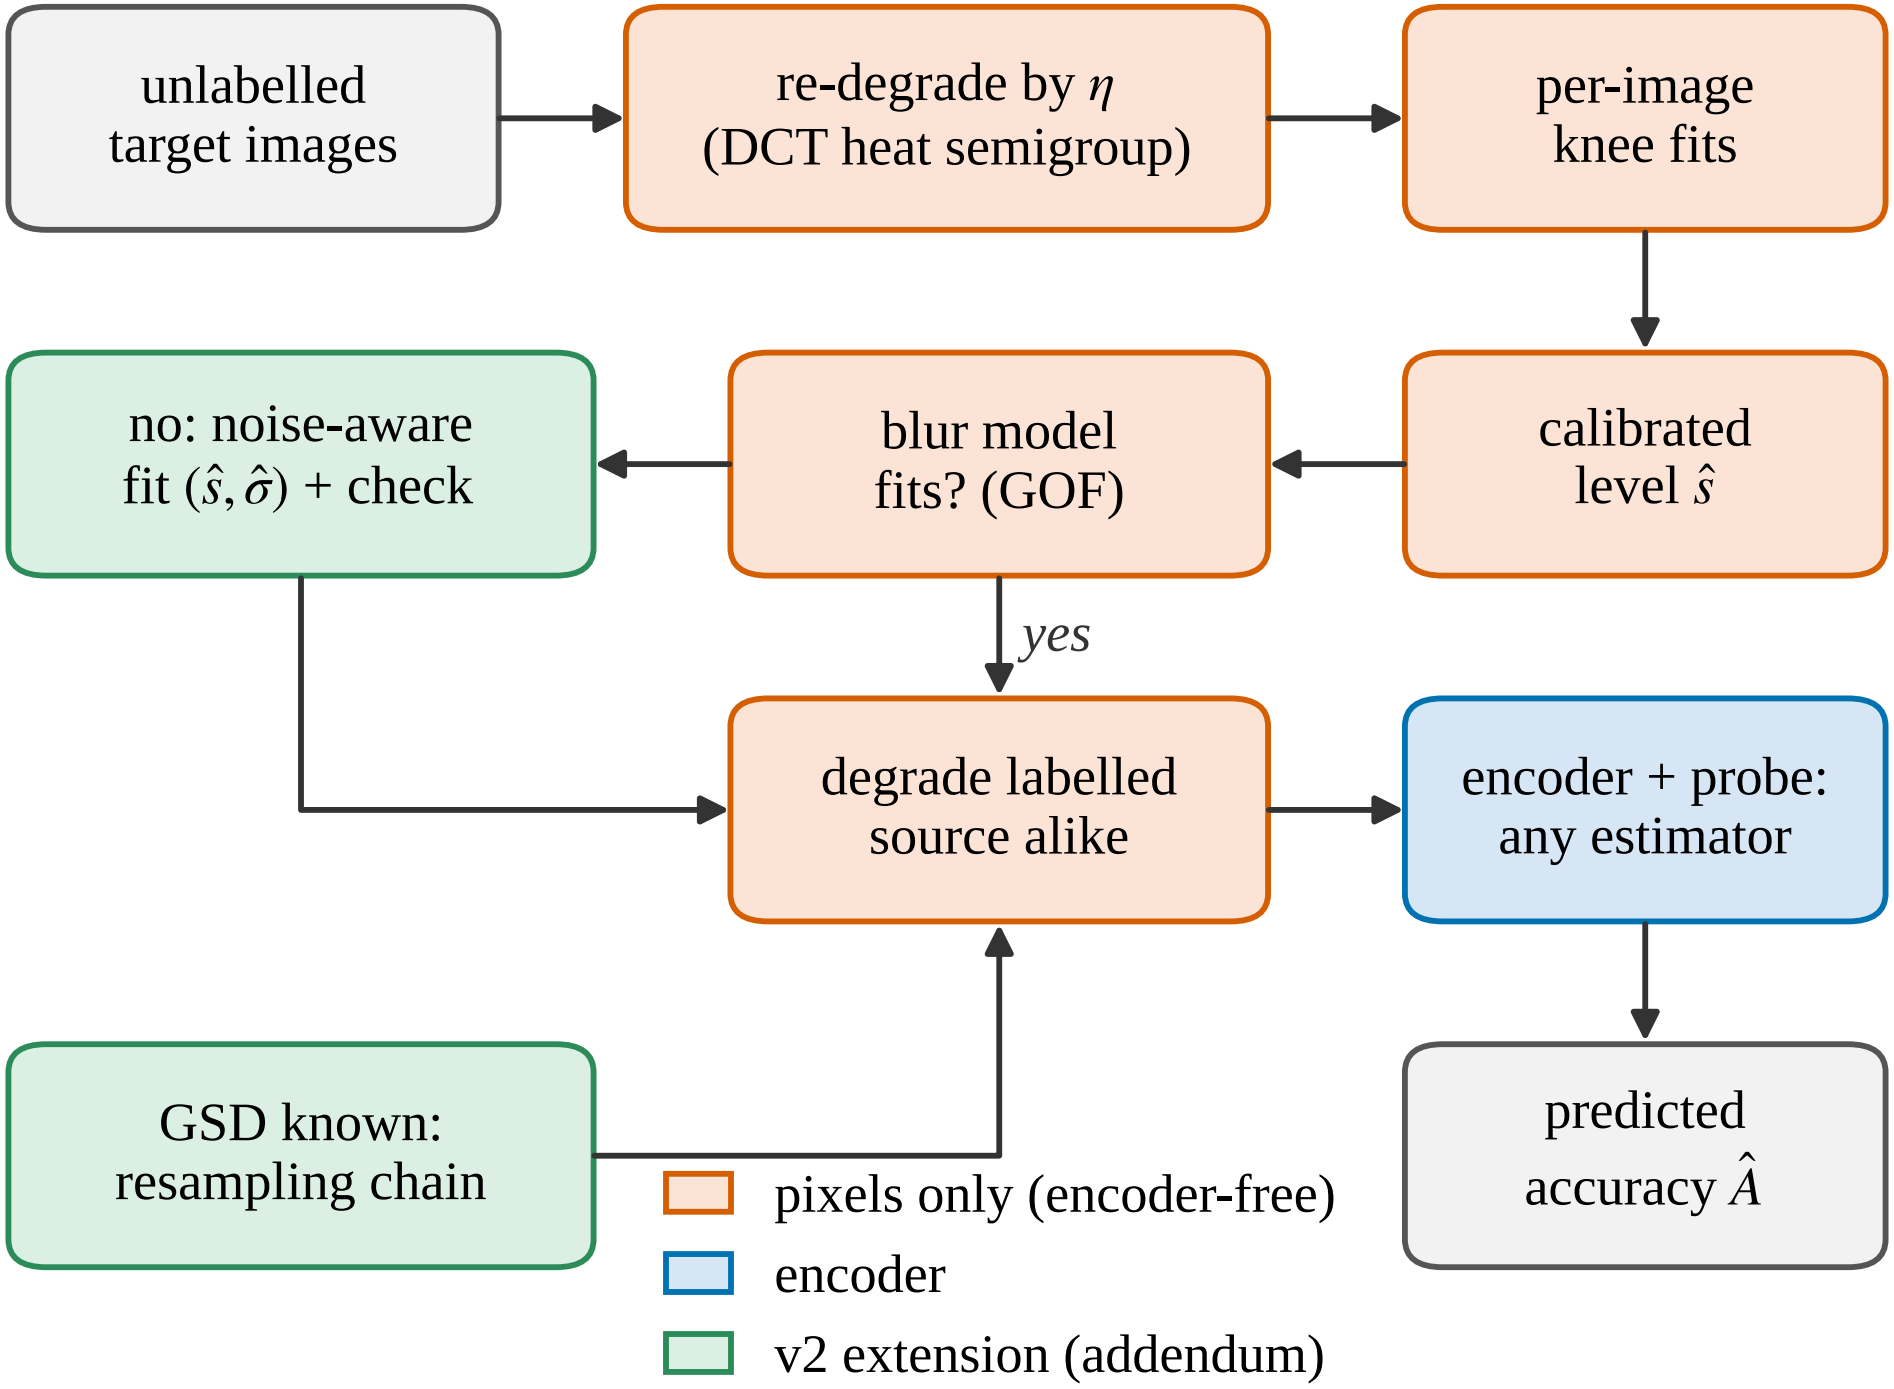
unlabelled target images
re-degrade by η (DCT heat semigroup)
per-image knee fits
calibrated level $\hat{s}$
blur model fits? (GOF)
no: noise-aware fit $(\hat{s}, \hat{\sigma})$ + check
yes
degrade labelled source alike
encoder + probe: any estimator
predicted accuracy $\hat{A}$
GSD known: resampling chain
pixels only (encoder-free)
encoder
v2 extension (addendum)