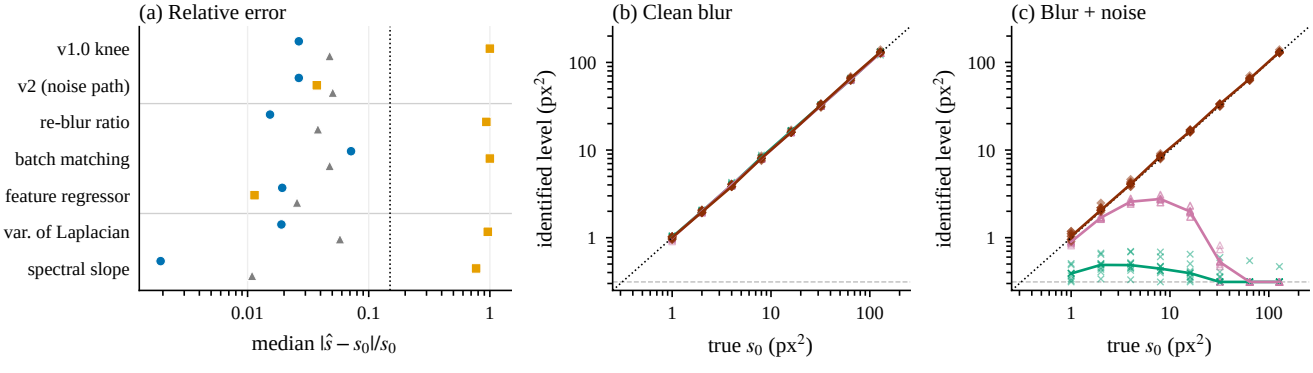
(a) Relative error
v1.0 knee
v2 (noise path)
re-blur ratio
batch matching
feature regressor
var. of Laplacian
spectral slope
0.01
0.1
1
median $|\hat{s} - s_0|/s_0$
(b) Clean blur
identified level (px^2)
100
10
1
1
10
100
true s_0 (px^2)
(c) Blur + noise
identified level (px^2)
100
10
1
1
10
100
true s_0 (px^2)
(a) clean
(a) label shift
(b, c) spectral slope
(b, c) ours (v2 level)
(a) noisy
(b, c) variance of the Laplacian