Mehery SDK Integration

App Brew · Natori

31 August 2026

CONTENTS

Mehery SDK Integration

- What “seamless” means
- 1. Install the package
- 2. Android folder
- 2.1 Manifest — android/app/src/main/AndroidManifest.xml
- 2.2 Credentials — android/app/src/main/res/values/strings.xml
- 2.3 Android push types (no extra host code)
- 3. iOS folder
- 3.1 Credentials + background — ios/natori/Info.plist
- 3.2 Entitlements — ios/natori/natori.entitlements
- 3.3 AppDelegate — ios/natori/AppDelegate.swift
- 3.4 Notification Service Extension — ios/ImageNotification/
- 3.5 Notification Content Extension — ios/ImagePreviewExtension/
- 3.6 Live Activity — ios/DeliveryActivity/
- 3.7 Podfile targets
- 4. JavaScript — the seamless layer
- 4.1 Why not index.js
- 4.2 Channel + environment
- 4.3 Cold-start order (mandatory)
- 4.4 Wire it in src/app/App.tsx
- 4.5 Dual-send events — MeheryTracker
- 4.6 Event catalog (Excel / GA4)
- 4.7 Identity and deep links
- 4.8 Coexistence with FirebasePush / Notifee

5. File map

6. Checklist

7. Troubleshooting

8. Repeat on another App Brew host

Mehery SDK Integration


App Brew host: Natori (`com.app.appbrew`)
SDK: `react-native-mehery-event-sender` `0.0.50`
Install path: `file:./vendor/react-native-mehery-event-sender`
Date: 31 August 2026

This is the one-page recipe for how PushApp sits inside App Brew **without touching product screens or `@gauntlet/*` call sites**. Copy a snippet, paste it, keep going.

What “seamless” means

App Brew already owns analytics, Shopify, and Firebase Push. Mehery is a **side layer**:

1. **Boot once** on cold start (`startMehery` after App mount).
2. **Dual-send** every ecom event through `MeheryTracker` on `AnalyticsProvider`.
3. **Own the rich notification tray** (Android native FCM service + iOS NSE/NCE) while App Brew still uses `modules['push'] = FirebasePush`.

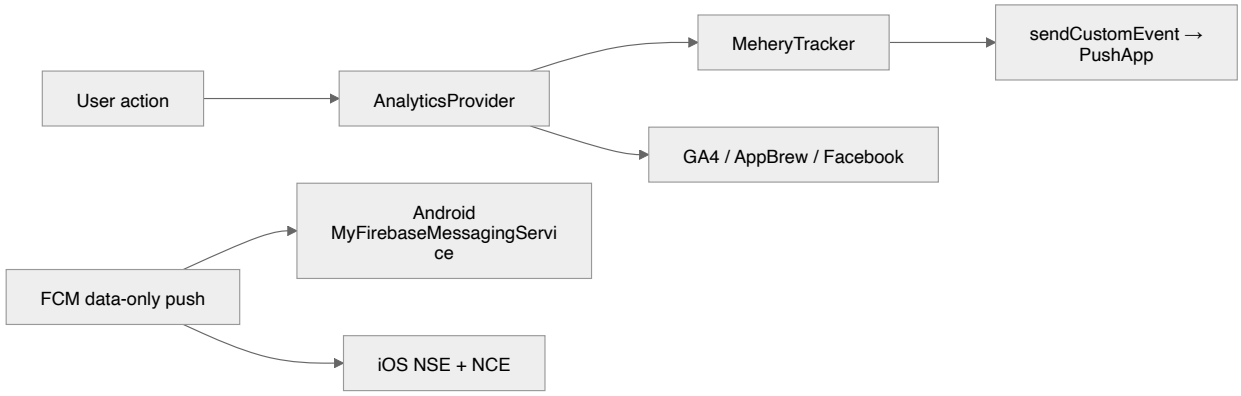

You never patch `add_to_cart` call sites. The tracker fans events out.

---

1. Install the package

```
{
  "dependencies": {
    "react-native-mehery-event-sender": "file:./vendor/react-native-mehery-event-
sender",
    "react-native-push-notification": "^8.1.1",
    "@react-native-async-storage/async-storage": "^3.1.1",
    "@react-native-firebase/app": "23.3.1",
    "@react-native-firebase/messaging": "23.3.1"
  }
}
```

```
pnpm install
pnpm pod-install
```

Confirm CocoaPods lists `MeheryEventSender`. Firebase `google-services` stays as it already is:

```
// android/build.gradle
classpath("com.google.gms:google-services:4.4.3")

// android/app/build.gradle
apply plugin: "com.google.gms.google-services"
```

---

2. Android folder

Mehery's `MyFirebaseMessagingService` is **merged from the SDK AAR**. The host only does two things: credentials, and getting React Native Firebase out of the way.

2.1 MANIFEST — `ANDROID/APP/SRC/MAIN/ANDROIDMANIFEST.XML`

Need `xmlns:tools` on `<manifest>`. Then:

```
<uses-permission android:name="android.permission.WAKE_LOCK" />
<uses-permission android:name="android.permission.POST_NOTIFICATIONS" />

<application ...>
  <!-- Mehery owns background rich FCM. Remove RNFB's no-op service. -->
  <service

android:name="io.invertase.firebase.messaging.ReactNativeFirebaseMessagingService"
    android:exported="false"
    tools:node="remove" />
  <!-- existing MainActivity, Firebase channel meta-data stay as-is -->
</application>
```

Why: if both services remain, data-only carousel / BigPicture / live-tray pushes never reach Mehery.

2.2 CREDENTIALS — `ANDROID/APP/SRC/MAIN/RES/VALUES/STRINGS.XML`

```
<string name="mehery_prod_app_id" translatable="false">pa_YOUR_APP_ID</string>
<string name="mehery_prod_app_key" translatable="false">pas_YOUR_APP_KEY</string>
<string name="mehery_sandbox_app_id" translatable="false">pa_YOUR_APP_ID</string>
<string name="mehery_sandbox_app_key"
translatable="false">pas_YOUR_APP_KEY</string>
<string name="mehery_dev_app_id" translatable="false">pa_YOUR_APP_ID</string>
<string name="mehery_dev_app_key" translatable="false">pas_YOUR_APP_KEY</string>
```

`readCredentialsForEnvironment()` reads these native strings. Rotating keys needs a store update.

2.3 ANDROID PUSH TYPES (NO EXTRA HOST CODE)

Type	Payload keys
Simple banner	`title`, `body`
BigPicture	`image` / `imageUrl` / `image_url`
Carousel (Prev/Next, max 4)	`imageUrls` or `image1`…`imageN`
Live tray	`message1` + `message2` + `message3`
CTA buttons	`title1`/`url1`/`action1` or `cta_buttons`
Deep link	`notification_url`

Rule: background rich UI needs a **data-only**, high-priority FCM. A top-level `notification` block shows the stock OS tray and skips Mehery.

```
{
  "title": "New arrivals",
  "body": "Swipe looks",
  "imageUrls": "[\"https://example.com/1.jpg\",\"https://example.com/2.jpg\"]",
  "notification_url": "https://shop.example/collections/all",
  "title1": "Shop",
  "url1": "https://shop.example/collections/all",
  "action1": "SHOP"
}
```

Verify:

```
adb logcat -s MyFirebaseMessagingService:I
```

---

3. iOS folder

Three extra targets ride inside `ios/natori.xcodeproj`, plus credentials and categories on the main app.

Folder / target	Bundle id	Job
`ios/natori/`	`com.app.appbrew`	Credentials, categories, APNs, Live Activity start
`ios/ImageNotification/`	NSE	Download images for rich banners
`ios/ImagePreviewExtension/`	`com.app.appbrew.ImagePreviewExtension`	Carousel / action UI
`ios/DeliveryActivity/`	`com.app.appbrew.DeliveryActivity`	Lock Screen / Dynamic Island

3.1 CREDENTIALS + BACKGROUND — `IOS/NATORI/INFO.PLIST`

```
<key>MeheryProdAppId</key>
<string>pa_YOUR_APP_ID</string>
<key>MeheryProdAppKey</key>
<string>pas_YOUR_APP_KEY</string>
<key>MeherySandboxAppId</key>
<string>pa_YOUR_APP_ID</string>
<key>MeherySandboxAppKey</key>
<string>pas_YOUR_APP_KEY</string>
<key>MeheryDevAppId</key>
<string>pa_YOUR_APP_ID</string>
<key>MeheryDevAppKey</key>
<string>pas_YOUR_APP_KEY</string>

<key>UIBackgroundModes</key>
<array>
  <string>remote-notification</string>
  <string>fetch</string>
</array>

<key>NSSupportsLiveActivities</key>
<true/>
<key>NSSupportsLiveActivitiesFrequentUpdates</key>
<true/>
```

3.2 ENTITLEMENTS — `IOS/NATORI/NATORI.ENTITLEMENTS`

```
<key>aps-environment</key>
<string>production</string>
<key>com.apple.security.application-groups</key>
<array>
  <string>group.com.app.appbrew.NotificationLiveActivity</string>
</array>
```

Enable the same App Group on `DeliveryActivityExtension`.

3.3 APPDELEGATE — `IOS/NATORI/APPDELEGATE.SWIFT`

On launch: Firebase, notification delegate, categories, APNs.

```
FirebaseApp.configure()
Messaging.messaging().delegate = self
UNUserNotificationCenter.current().delegate = self
registerNotificationCategories()

UNUserNotificationCenter.current().requestAuthorization(options: [.alert, .sound,
.badge]) { granted, _ in
  if granted {
    DispatchQueue.main.async { application.registerForRemoteNotifications() }
  }
}
```

Forward APNs to FCM **and** `RNCPushNotificationIOS`. Do **not** also send the FCM token through Mehery's APNs `PushTokenEvent` (that corrupts the PushApp session id).

```
func application(_ application: UIApplication,
                 didRegisterForRemoteNotificationsWithDeviceToken deviceToken:
Data) {
  Messaging.messaging().apnsToken = deviceToken
  PushTokenManager.sendTokenEvent("apns", token: /* hex */)
  RNCPushNotificationIOS.didRegisterForRemoteNotifications(withDeviceToken:
deviceToken)
}
```

Register every PushApp category (carousel + all 2-button and 3-button sets). The NCE `Info.plist` must list the **same** ids:

`THREE_BUTTON_CATEGORY`, `THREE_CAROUSEL_CATEGORY`, `THREE_CONFIRMATION_CATEGORY`, `THREE_RESPONSE_CATEGORY`, `THREE_SUBSCRIPTION_CATEGORY`, `THREE_TRANSACTION_CATEGORY`, `THREE_CONTENT_CATEGORY`, `THREE_CHECKOUT_CATEGORY`, `THREE_FORM_ACTION_CATEGORY`, `THREE_DESTRUCTIVE_ACTION_CATEGORY`, `THREE_CONTACT_CATEGORY`, `CAROUSEL_CATEGORY`, `CONFIRMATION_CATEGORY`, `RESPONSE_CATEGORY`, `SUBSCRIPTION_CATEGORY`, `TRANSACTION_CATEGORY`, `CONTENT_CATEGORY`, `CHECKOUT_CATEGORY`, `FORM_ACTION_CATEGORY`, `DESTRUCTIVE_ACTION_CATEGORY`, `CONTACT_CATEGORY`.

Foreground presentation:

```
completionHandler([.banner, .list, .sound, .badge])
```

Tap handling opens `notification_url` / `notificationUrl` / `url` / `deeplink`.

Live Activity: `didReceiveRemoteNotification` starts/updates when the payload has `activity_id` (see `ios/natori/MeheryLiveActivity.swift`). Silent ping: `type: silent_daily_ping`.

3.4 NOTIFICATION SERVICE EXTENSION — `IOS/IMAGENOTIFICATION/`

File	Role
`NotificationService.swift`	Mehery multi-image NSE (not Firebase `populateNotificationContent`)
`Info.plist`	`com.apple.usernotifications.service` + `NSAllowsArbitraryLoads`

```
<key>NSExtensionPointIdentifier</key>
<string>com.apple.usernotifications.service</string>
<key>NSAppTransportSecurity</key>
<dict>
  <key>NSAllowsArbitraryLoads</key>
  <true/>
</dict>
```

3.5 NOTIFICATION CONTENT EXTENSION — `IOS/IMAGEPREVIEWEXTENSION/`

Carousel / category UI. Principal class `NotificationViewController`. Categories in `Info.plist` must match AppDelegate.

3.6 LIVE ACTIVITY — `IOS/DELIVERYACTIVITY/`

WidgetKit extension. Shared App Group for hero images. Signing: create the App ID + App Group in Apple Developer and assign profiles before release.

3.7 PODFILE TARGETS

```
target 'natori' do
  # existing RN + Firebase pods
end

target 'ImageNotification' do
end

target 'ImagePreviewExtension' do
end

target 'DeliveryActivityExtension' do
end
```

The NSE does **not** depend on Firebase Messaging.

```
pnpm pod-install
```

---

4. JavaScript — the seamless layer

All host glue lives in `src/mehery/`. App Brew screens stay untouched.

4.1 WHY NOT `INDEX.JS`

This app uses Re.Pack. Loading Mehery during `AppRegistry` evaluation stalls on circular modules. **Do not** `import` the SDK at the top of `index.js`. Register FCM from `startMehery` after App mount.

```
// index.js — Mehery is NOT imported here
AppRegistry.registerComponent(appName, () => App)
```

4.2 CHANNEL + ENVIRONMENT

`src/mehery/channelPin.ts` / `bootstrap.ts`:

```
export const MEHERY_CHANNEL_ID = 'ecommerce_1786525308082' // tenant_channel from
dashboard
export const MEHERY_ENVIRONMENT = false // production → pushapp.ai
```

`initSdk` env	Host	Native keys
`false`	`pushapp.ai`	Prod
`true`	`pushapp.net.in`	Sandbox
`'development'`	`pushapp.co.in`	Dev

Always `readCredentialsForEnvironment(env)` then `pushappAuth` then `initSdk(..., env)` with the **same** env.

Pin the channel in AsyncStorage **before** any SDK call. The SDK example app writes `demo_*`; leftover demo ids win over `initSdk`.

4.3 COLD-START ORDER (MANDATORY)

Implemented in `src/mehery/startMehery.ts` + `bootstrap.ts`:

```
ensureMeheryChannelPinned
registerFcmBackgroundHandler
registerMeheryTracker
wire identity listeners
readCredentialsForEnvironment(env)
pushappAuth(xApiId, xApiKey)
initSdk(null, CHANNEL_ID, env, logs)
waitForSdkReady()          // false = failure, do not send events
configure deep links
Android notification permission
setMeheryOwnsPushTray(true)
messaging().requestPermission() + getToken()
OnUserLogin if the user is already idle
```

4.4 WIRE IT IN `SRC/APP/APP.TSX`

Tracker first (so early cart / install events queue instead of dropping), then boot after mount, then poll overlay.

```
function initApp() {
  registerMeheryTracker(AnalyticsProvider.getInstance())
  installMeheryCartPressTracking()
  installNotifeePushAppDeduper()
  modules['push'] = FirebasePush.getInstance // keep App Brew push contract
}

// inside App:
React.useEffect(() => {
  import('../mehery/startMehery').then((m) => m.startMehery())
}, [])

return (
  <>
    <Shell ... />
    <MeheryPollOverlay />
  </>
)
```

`MeheryPollOverlay` loads `PollOverlayProvider` from `loadMeherySdk()` after mount. Skip on iOS if `NativeModules.RNCPushNotificationIOS` is missing (stale binary / pods not linked).

4.5 DUAL-SEND EVENTS — `MEHERYTRACKER`

```
class MeheryTracker extends AnalyticsTrackerV2 {
  async sendEvent(event, payload) {
    await sendMeheryCustomEvent(toGa4EventName(event), payload, 'LOG')
  }
  async setUserDetails(user) {
    // OnUserLogin + updateUserProfile, or OnUserLogOut when cleared
  }
}
```

Exact GA4 names (`add_to_cart`, `purchase`, `screen_view`, …). `app_install_ios` / `app_install_android` remap to `app_install`. Register the tracker in `__DEV__` **and release**.

Manual send (rare; prefer the tracker):

```
import { sendMeheryCustomEvent } from '../mehery/sendCustomEvent'

await sendMeheryCustomEvent('add_to_cart', {
  currency: 'INR',
  value: 2499,
  items: [{ item_id: 'sku_1', item_name: 'Tee', quantity: 1, price: 2499 }],
})
```

4.6 EVENT CATALOG (EXCEL / GA4)

Event	Properties
`app_install`	`version`, `sizeWidth`, `sizeHeight`
`screen_view`	`screen_name`, `screen_class`
`push_notification_subscribed` / `_unsubscribed`	`push_enabled`
`login` / `signup`	`method`
`logout`	—
`view_item`	`currency`, `value`, `items[]`
`view_item_list`	`item_list_id`, `handle`, `item_list_name`, `url`
`search`	`search_term`
`add_to_cart` / `remove_from_cart`	`currency`, `value`, `items[]`
`view_cart`	`url`, `value`, `checkout_token`, `sub_total`, `discount`, `currency`, `coupon`, `items[]`
`add_to_wishlist` / `remove_from_wishlist` / `notify_back_in_stock`	`currency`, `value`, `items[]`
`begin_checkout` / `add_shipping_info`	cart-like set
`apply_coupon`	`coupon`, `isApplicable`
`remove_coupon`	`coupon`
`purchase`	`transaction_id`, `shopify_order_id`, `url`, `value`, `checkout_token`, `sub_total`, `discount`, `currency`, `coupon`, `items[]`
`refund`	`reason`, `transaction_id`, `value`, `currency`

`items[]` fields: `item_id`, `handle`, `item_name`, `item_variant`, `price`, `original_price`, `discount`, `url`, `sku`, `item_category`, `item_brand`, `img_url`, `quantity`.

4.7 IDENTITY AND DEEP LINKS

Login → `OnUserLogin(userId)` + `updateUserProfile`. Logout → `OnUserLogOut`. `src/mehery/identityListeners.ts` replays the current App Brew user after SDK ready (analytics subscribe does not fire immediately).

```
sdk.configureNotificationLinkRewrites([
  { httpsHost: 'mehery2.myshopify.com', appScheme: 'mehery2' },
  { httpsHost: 'www.mehery2.myshopify.com', appScheme: 'mehery2' },
])
sdk.setNotificationUrlHandler((url) => Linking.openURL(url))
```

4.8 COEXISTENCE WITH FIREBASEPUSH / NOTIFEE

Layer	Owner
App Brew `modules['push']`	`@gauntlet/firebase-push`
Rich tray (Android background)	Mehery `MyFirebaseMessagingService`
Rich tray (iOS)	NSE + NCE
Dual-send analytics	`MeheryTracker`
Foreground double-tray	`installNotifeePushAppDeduper()` + `isLikelyPushAppPayload`

Do not patch `@gauntlet/*` for dual-send.

---

5. File map

Path	What it does
`vendor/react-native-mehery-event-sender/`	SDK (treat as a package)
`src/mehery/startMehery.ts`	Host entry after App mount
`src/mehery/bootstrap.ts`	Auth → `initSdk` → ready
`src/mehery/sdk.ts`	Re.Pack-safe SDK loader
`src/mehery/MeheryTracker.ts`	Dual-send + identity
`src/mehery/sendCustomEvent.ts`	`sendCustomEvent` wrapper
`src/mehery/channelPin.ts`	Force dashboard channel id
`src/mehery/pushCoexistence.ts`	Permission + Notifee dedupe
`src/mehery/deepLinks.ts`	Notification URL → Linking
`src/app/App.tsx`	Tracker, `startMehery`, poll overlay
`android/.../AndroidManifest.xml`	`WAKE_LOCK` + RNFB service remove
`android/.../values/strings.xml`	`mehery_*` credentials
`ios/natori/Info.plist`	Credentials + background + Live Activities
`ios/natori/AppDelegate.swift`	Categories, APNs, URLs, silent/live
`ios/natori/MeheryLiveActivity.swift`	Start/update Live Activities
`ios/ImageNotification/`	NSE
`ios/ImagePreviewExtension/`	NCE
`ios/DeliveryActivity/`	Live Activity widget
`ios/Podfile`	Three extension targets

6. Checklist

- ☐ Peers installed; `pnpm pod-install` shows `MeheryEventSender`
- ☐ Real `pa_` / `pas_` keys in Info.plist **and** `strings.xml`
- ☐ Channel id is the dashboard `tenant_channel`, never `demo_*`

- ☐ `initSdk` env matches the native key slot
- ☐ Android: RNFB messaging service `tools:node="remove"`
- ☐ iOS: `remote-notification` background mode; categories registered
- ☐ NSE + NCE + Live Activity targets embedded and signed
- ☐ `MeheryTracker` registered in `__DEV__` and release
- ☐ `PollOverlayProvider` mounted once at root
- ☐ FCM / APNs payloads for rich UI are **data-only** + high priority

---

7. Troubleshooting

Symptom	Likely cause	Fix
Auth / init fails	Wrong env or placeholder keys	Match env + native keys + channel
No rich Android background push	Top-level FCM `notification`, or dual messaging services	Data-only + confirm RNFB remove; `adb logcat -s MyFirebaseMessagingService:I`
iOS carousel missing	NCE not embedded / unsigned / category mismatch	Confirm `ImagePreviewExtension` + same category ids
Events missing in PushApp	Fired before `waitForSdkReady`	Await `startMehery`; then retry
Double foreground notification	Notifee + Mehery both display	`installNotifeePushAppDeduper`
Live Activity missing	App Group / signing / no `activity_id`	Enable group on app + extension; see `ios/DeliveryActivity/README-NATORI.md`
`RNCPushNotificationIOS` missing	Pods not in the binary	Rebuild iOS after `pod install`
Device stuck on `demo_*` channel	Example-app leftovers in AsyncStorage	`ensureMeheryChannelPinned` runs first; reinstall if needed

---

8. Repeat on another App Brew host

1. Add the three JS dependencies and run `pod-install`.
2. Copy Android manifest service-remove + `strings.xml` keys.
3. Copy iOS Info.plist keys, AppDelegate category/APNs blocks, and the three extension folders.
4. Copy `src/mehery/` and the three `App.tsx` hooks (tracker, `startMehery`, poll overlay).
5. Set `MEHERY_CHANNEL_ID` and `MEHERY_ENVIRONMENT`.
6. Point deep-link rewrites at **your** Shopify host / app scheme.
7. Keep `modules['push'] = FirebasePush`. Do not edit SDK sources.