




LINUX SUNUCUSUNUN GÜVENLİĞİNİ ARTIRMAK İÇİN TEMEL ADIMLARI UYGULAMA


Loading...

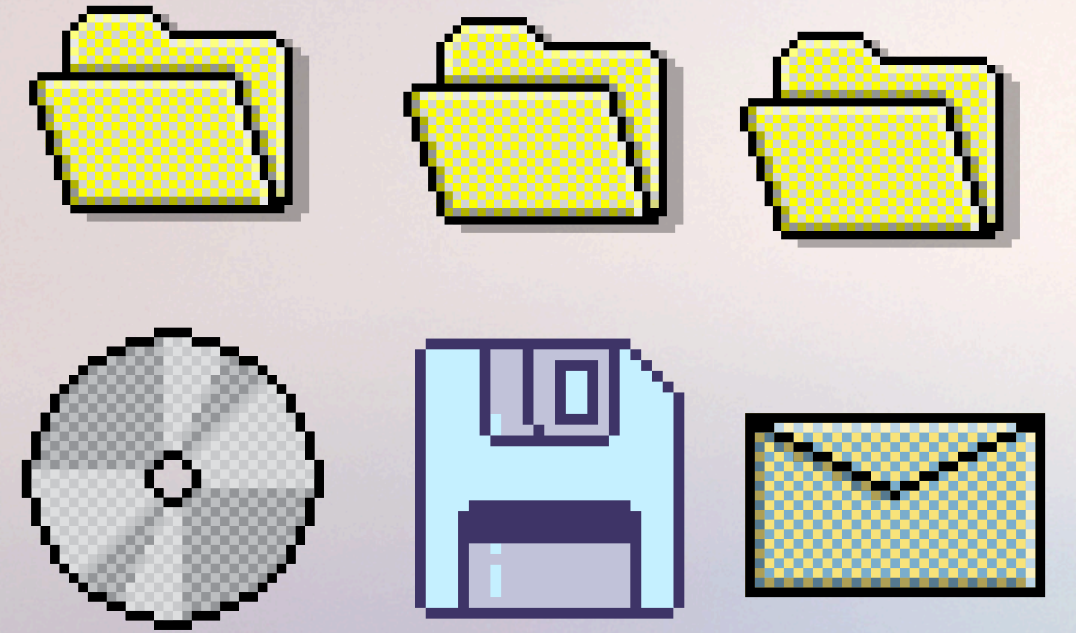

Presented by: Mehmet Can Kocaoğlu
Date: 01 June 2026

Start

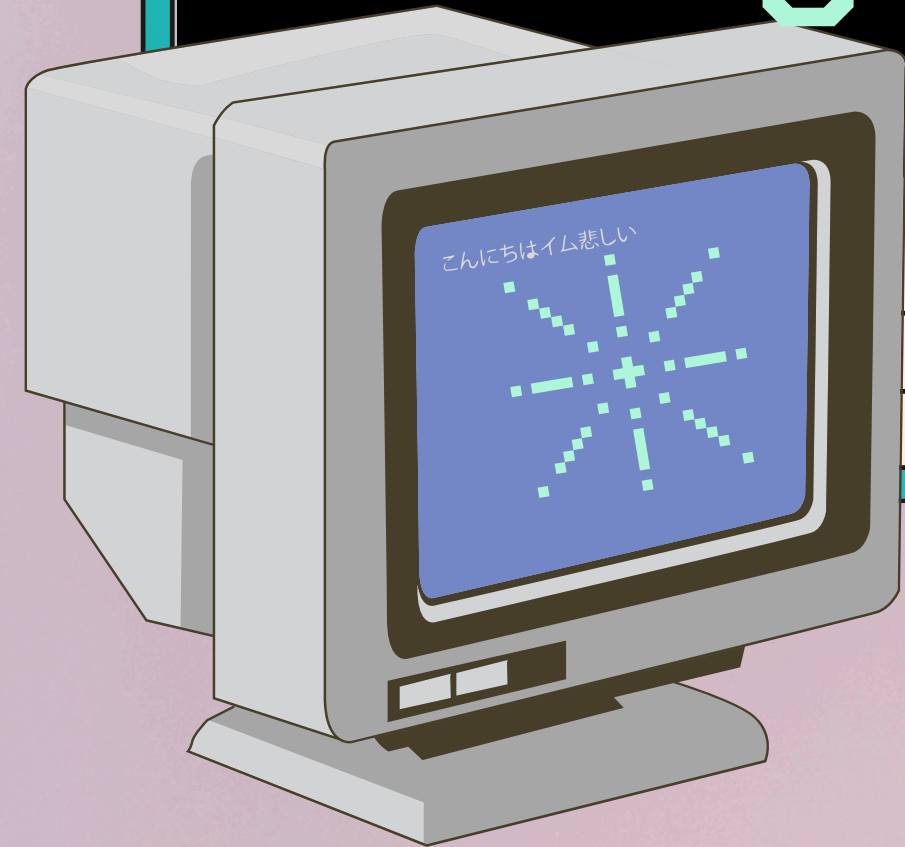

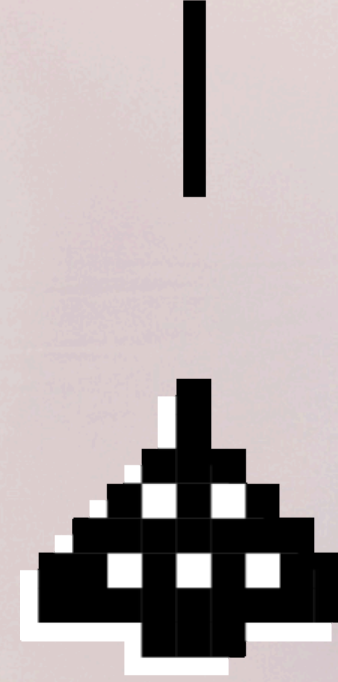

- `sudo nano /etc/ssh/sshd_config` komudu ile yapılandırma dosyasının düzenlemesini açtım daha sonradan Port 22 kısmından 22 kısmının sonuna iki tane daha 22 ekleyerek port numarasını değiştirdim daha sonrasında PermitRootLogin no yaparak root girişini engelledim.
- `sudo ufw allow 2222/tcp` `sudo ufw reload` komudu ile yeni porta güvenlik duvarından izin verdim ve son olarak `sudo systemctl restart sshd`
- `komudu` ile ayarların geçerli olması için yeniden başlattım
-

```
GNU nano 2.3.1 File: /etc/ssh/sshd_config Modified ^
# $OpenBSD: sshd_config,v 1.93 2014/01/10 05:59:19 djm Exp $
# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.
# This sshd was compiled with PATH=/usr/local/bin:/usr/bin
# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.
# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::
#
# The default requires explicit activation of protocol 1
#Protocol 2
^G Get Help      ^O WriteOut     ^R Read File    ^Y Prev Page    ^K Cut Text      ^C Cur Pos
^X Exit          ^J Justify      ^W Where Is    ^V Next Page    ^U UnCut Text   ^T To Spell
```