

# **ENG 346**

# **Data Structures and**

# **Algorithms for Artificial**

# **Intelligence**

## **Matrix Operations and Numpy**

Dr. Mehmet PEKMEZCİ

[mpekmezci@gtu.edu.tr](mailto:mpekmezci@gtu.edu.tr)

<https://github.com/mehmetpekmezci/GTU-ENG-346>

# Matrices

- Matrices can be used to store data
  - Image data ( $n \times m$ ) matrix
  - Sound data ( $n \times 1$ ) matrix
  - Any Log data ( $n \times m$ ) matrix,
    - e.g. : log of humidity, temperature, ... values in a room
  - Geometric data
- Matrices can be used for Linear Transformations (Linear Function)
  - Rotation
  - Translation
  - Stretching

# Determinants and Inverse of a Matrix

Example : 4x4 matrix A=

|   |   |   |   |
|---|---|---|---|
| a | b | c | d |
| e | f | g | h |
| i | j | k | l |
| m | n | o | p |

Minor of element b is  $\det(M_{12})$ ,

Cofactor(A) is a matrix composed of  $C_{ij}$ .

$$C_{ij} = (-1)^{i+j} \det(M_{ij})$$

$M_{12} =$

|   |   |   |
|---|---|---|
| e | g | h |
| i | k | l |
| m | o | p |

$\det(A)=|A| =$

$a \cdot \det \left( \begin{array}{|c|c|c|c|} \hline & f & g & h \\ \hline & j & k & l \\ \hline & n & o & p \\ \hline \end{array} \right) - b \cdot \det \left( \begin{array}{|c|c|c|c|} \hline & & & \\ \hline e & & g & h \\ \hline i & & k & l \\ \hline m & & o & p \\ \hline \end{array} \right)$

$+ c \cdot \det \left( \begin{array}{|c|c|c|c|} \hline & & & \\ \hline e & f & & h \\ \hline i & j & & l \\ \hline m & n & & p \\ \hline \end{array} \right) - d \cdot \det \left( \begin{array}{|c|c|c|c|} \hline & & & \\ \hline e & f & g & \\ \hline i & j & k & \\ \hline m & n & o & \\ \hline \end{array} \right)$

|          |          |          |          |
|----------|----------|----------|----------|
| $C_{11}$ | $C_{12}$ | $C_{13}$ | $C_{14}$ |
| $C_{21}$ | $C_{22}$ | $C_{23}$ | $C_{24}$ |
| $C_{31}$ | $C_{32}$ | $C_{33}$ | $C_{34}$ |
| $C_{41}$ | $C_{42}$ | $C_{43}$ | $C_{44}$ |

**Inverse of A**

$$A^{-1} = 1/\det(A) \cdot (\text{Cofactor}(A))^T$$

**NO INVERSE**

if  $\det(A)=0$  or

matrix is not square

# Transpose and Inverse Properties

$$A \cdot A^{-1} = A^{-1} \cdot A = I$$

$$(A^{-1})^{-1} = A$$

$$(A^T)^T = A$$

$$(A^T)^{-1} = (A^{-1})^T$$

$$(AB)^T = B^T \cdot A^T$$

$$(A+B)^T = A^T + B^T$$

$$(AB)^{-1} = B^{-1} \cdot A^{-1}$$

$$(k \cdot A)^{-1} = 1/k \cdot A^{-1}$$


$$(k \cdot A)^T = k \cdot A^T$$

$$\det(A^T) = \det(A)$$

$$\det(A^{-1}) = 1/\det(A)$$

# Tensors (Multilinear Map)


- Vectors = 1<sup>st</sup> order Tensor  $\begin{bmatrix} 1 \\ 3 \end{bmatrix}$  (1D arrays)
- Matrices = 2<sup>nd</sup> order Tensor  $\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$  (2D arrays)
- 3<sup>rd</sup> order Tensor , is a stack of matrices ( 3D arrays )

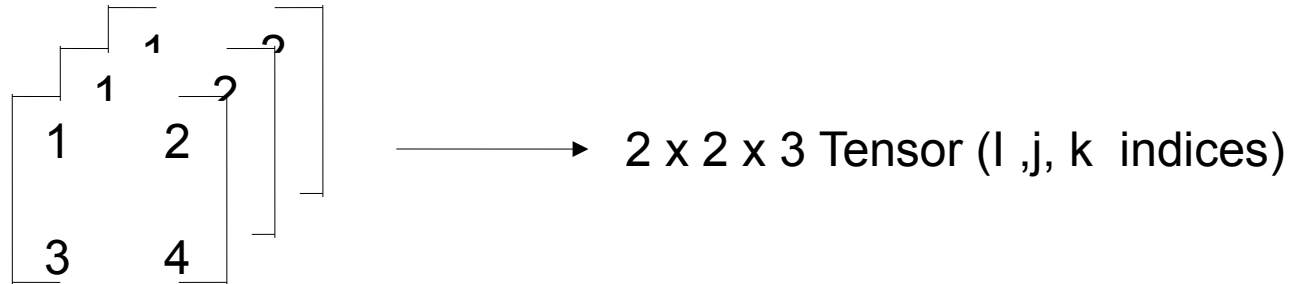

- Tensor may have n order.

# Matrices – Geometric Meaning


## • Rotation

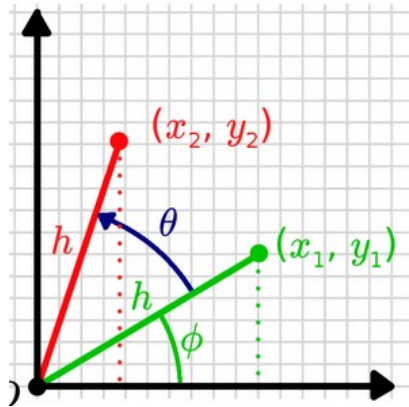

$$\begin{bmatrix} x_2 \\ y_2 \end{bmatrix} = \begin{bmatrix} \cos(\theta) & -\sin(\theta) \\ \sin(\theta) & \cos(\theta) \end{bmatrix} \begin{bmatrix} x_1 \\ y_1 \end{bmatrix}$$

**NOTE: 3D rotation matrix is a 3x3 matrix, not a 2x2x2 tensor**

**Example :**

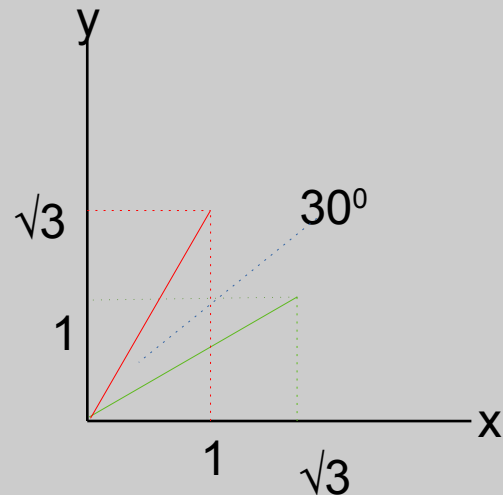

$$\begin{bmatrix} 1 \\ \sqrt{3} \end{bmatrix} = \begin{bmatrix} \cos(\pi/6) & -\sin(\pi/6) \\ \sin(\pi/6) & \cos(\pi/6) \end{bmatrix} \begin{bmatrix} \sqrt{3} \\ 1 \end{bmatrix}$$

```
import numpy as np
theta = np.radians(30)
c, s = np.cos(theta), np.sin(theta)
R = np.array(((c, -s), (s, c)))
green_vector=np.array([np.sqrt(3),1])
print(green_vector)
red_vector=np.dot(R,green_vector)
print(red_vector)
```

# Matrix Operations

- Matrix/Tensor Construction
- Dimensions (Shape) and reshaping, array slicing, masking.
- Matrix Summation
- Transpose of the Matrix
- Matrix Multiplication
- Inverse of the Matrix
- Stacking (Vertical, Horizontal, Depth)
- Splitting (Vertical, Horizontal)
  
- **NOT COVERED : Eigenvalues, Eigenvectors, SVD , Tensor Dot**

# Matrix/Tensor Construction

$$\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$$


```
import numpy as np  
a = np.array( [ [1, 2] , [3, 4] ] )  
print(a)
```

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 01.arrays_matrices.py  
[[1 2]  
 [3 4]]
```

$$\begin{bmatrix} 10 & 10 \\ 10 & 10 \end{bmatrix}$$

```
np.full((2, 2), 10, dtype=int)  
# 2 rows, 2 columns
```

$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

```
number_of_rows=2  
np.identity(number_of_rows, dtype=int)
```

$$\begin{bmatrix} 0.0 & 0.0 \\ 0.0 & 0.0 \end{bmatrix}$$

```
np.zeros(2)  
# default dtype=float
```

$$\begin{bmatrix} 1.0 & 0.0 \\ 0.0 & 1.0 \end{bmatrix}$$

```
np.full((2, 2), 1.0, dtype=float)  
# 2 rows, 2 columns
```



# Matrix/Tensor Construction

```
import numpy as np
np.random.seed(0) # seed for reproducibility
random_tensor = np.random.randint(100, size=(3, 4, 5))
print(random_tensor)
```

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 02.random.py
[[[44 47 64 67 67]
  [ 9 83 21 36 87]
  [70 88 88 12 58]
  [65 39 87 46 88]]

 [[81 37 25 77 72]
  [ 9 20 80 69 79]
  [47 64 82 99 88]
  [49 29 19 19 14]]

 [[39 32 65  9 57]
  [32 31 74 23 35]
  [75 55 28 34  0]
  [ 0 36 53  5 38]]]
```

# Matrix Dimensions

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1, 2] , [3, 4] , [5,6] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

|   |   |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |

```
print("\nRESHAPED TO (2,3) ARRAY")
```

```
b=a.reshape((2,3))
```

```
print(f"MATRIX DIM : {b.shape}")
```

```
print(f"MATRIX : {b}")
```

```
print("\nRESHAPED TO (6,1) ARRAY")
```

```
c=a.reshape((6,))
```

```
print(f"MATRIX DIM : {c.shape}")
```

```
print(f"MATRIX : {c}")
```

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 03.matrix.dim.py
INITIAL ARRAY
MATRIX DIM : (3, 2)
MATRIX : [[1 2]
 [3 4]
 [5 6]]

RESHAPED TO (2,3) ARRAY
MATRIX DIM : (2, 3)
MATRIX : [[1 2 3]
 [4 5 6]]

RESHAPED TO (6,1) ARRAY
MATRIX DIM : (6,)
MATRIX : [1 2 3 4 5 6]
```

# Array Slicing

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1, 2,11] , [3, 4,12] , [5,6,13] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

```
b=np.copy(a[1,:2])
```

```
print(f"\nMATRIX DIM : {b.shape}")
```

```
print(f"MATRIX : {b}")
```

```
a[1:,1]=8
```

```
print(f"\nMATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

```
a[2:,1:]=b
```

```
print(f"\nMATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

```
mpekmezci@cobalt:~$ python3 04.array.slicing.py
INITIAL ARRAY
MATRIX DIM : (3, 3)
MATRIX : [[ 1  2 11]
 [ 3  4 12]
 [ 5  6 13]]

MATRIX DIM : (2,)
MATRIX : [3 4]

MATRIX DIM : (3, 3)
MATRIX : [[ 1  2 11]
 [ 3  8 12]
 [ 5  8 13]]

MATRIX DIM : (3, 3)
MATRIX : [[ 1  2 11]
 [ 3  8 12]
 [ 5  3  4]]
```

# Array Masking

```
import numpy as np

print("INITIAL ARRAY")
a = np.arange(15)
print(f"MATRIX DIM : {a.shape}")
print(f"MATRIX : {a}")

wanted_indices=[3,8,12]

b=np.copy(a[wanted_indices])
print(f"\nMATRIX DIM : {b.shape}")
print(f"MATRIX : {b}")
```

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 05.array.masking.py
INITIAL ARRAY
MATRIX DIM : (15,)
MATRIX : [ 0  1  2  3  4  5  6  7  8  9 10 11 12 13 14]

MATRIX DIM : (3,)
MATRIX : [ 3  8 12]
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ vi 05.array.masking.py
```

# Matrix Summation

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1, 2] , [3, 4] , [5,6] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

|   |   |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |

```
b=a+a
```

```
print(f"\n MATRIX:{b} \n")
```

```
mpekmezci@coba1t:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 06.summation.py
INITIAL ARRAY
MATRIX DIM : (3, 2)
MATRIX : [[1 2]
 [3 4]
 [5 6]]

MATRIX:[[ 2  4]
 [ 6  8]
 [10 12]]
```

# Matrix Transpose

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1, 2] , [3, 4] , [5,6] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

|   |   |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |

```
b=a.T
```

```
print(f"\n MATRIX:{b} \n")
```

```
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ vi 07.transpose.py
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 07.transpose.py
INITIAL ARRAY
MATRIX DIM : (3, 2)
MATRIX : [[1 2]
 [3 4]
 [5 6]]

MATRIX:[[1 3 5]
 [2 4 6]]
```

# Matrix Multiplication

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1, 2] , [3, 4] , [5,6] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

|   |   |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |

```
b=np.matmul(a.T , a)
```

```
print(f"\n MATRIX:{b} \n")
```

```
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ vi 08.multiplication.py
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 08.multiplication.py
INITIAL ARRAY
MATRIX DIM : (3, 2)
MATRIX : [[1 2]
 [3 4]
 [5 6]]

MATRIX: [[35 44]
 [44 56]]
```

# Matrix Inverse

```
import numpy as np
```

```
print("INITIAL ARRAY")
```

```
a = np.array( [ [1,2,3] , [5,7,11] , [13,17,23] ] )
```

```
print(f"MATRIX DIM : {a.shape}")
```

```
print(f"MATRIX : {a}")
```

```
b=np.linalg.inv(a)
```

```
print(f"\n INVERSE MATRIX:{b} \n")
```

```
c=np.matmul(b,a)
```

```
print(f"\n A INVERSE * A :{c} \n")
```

|    |    |    |
|----|----|----|
| 1  | 2  | 3  |
| 5  | 7  | 11 |
| 13 | 17 | 23 |

Very close to 0

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 09.inverse.py
INITIAL ARRAY
MATRIX DIM : (3, 3)
MATRIX : [[ 1  2  3]
 [ 5  7 11]
 [13 17 23]]

INVERSE MATRIX:[[-2.16666667  0.41666667  0.08333333]
 [ 2.33333333 -1.33333333  0.33333333]
 [-0.5         0.75        -0.25         ]]

A INVERSE * A :[[ 1.00000000e+00  1.08246745e-15  1.58206781e-15]
 [-4.99600361e-16  1.00000000e+00 -6.10522664e-16]
 [ 2.77555756e-16  9.43689571e-16  1.00000000e+00]]
```



# Horizontal Stacking

```
import numpy as np
```

```
a = np.array( [ [1, 2,3] , [4, 5, 6 ] , [7,8,9] ] )  
print(f"MATRIX A : {a}")
```

```
b = np.array( [ [11, 12,13] , [14, 15, 16 ] , [17,18,19] ] )  
print(f"MATRIX B : {b}")
```

```
c=np.hstack((a,b))  
print(f"\n HSTACK:{c} \n")
```

|   |   |   |    |    |    |
|---|---|---|----|----|----|
| 1 | 2 | 3 | 11 | 12 | 13 |
| 4 | 5 | 6 | 14 | 15 | 16 |
| 7 | 8 | 9 | 17 | 18 | 19 |

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 10.hstack.py  
MATRIX A : [[1 2 3]  
 [4 5 6]  
 [7 8 9]]  
MATRIX B : [[11 12 13]  
 [14 15 16]  
 [17 18 19]]  
  
HSTACK:[[ 1  2  3 11 12 13]  
 [ 4  5  6 14 15 16]  
 [ 7  8  9 17 18 19]]
```

# Vertical Stacking

```
import numpy as np
```

```
a = np.array( [ [1, 2,3] , [4, 5, 6 ] , [7,8,9] ] )  
print(f"MATRIX A : {a}")
```

```
b = np.array( [ [11, 12,13] , [14, 15, 16 ] , [17,18,19] ] )  
print(f"MATRIX B : {b}")
```

```
c=np.vstack((a,b))  
print(f"\n VSTACK:{c} \n")
```

|   |   |   |    |    |    |
|---|---|---|----|----|----|
| 1 | 2 | 3 | 11 | 12 | 13 |
| 4 | 5 | 6 | 14 | 15 | 16 |
| 7 | 8 | 9 | 17 | 18 | 19 |

```
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 11.vstack.py  
MATRIX A : [[1 2 3]  
 [4 5 6]  
 [7 8 9]]  
MATRIX B : [[11 12 13]  
 [14 15 16]  
 [17 18 19]]  
  
VSTACK:[[ 1  2  3]  
 [ 4  5  6]  
 [ 7  8  9]  
 [11 12 13]  
 [14 15 16]  
 [17 18 19]]
```

# Depth Stacking

```
import numpy as np
```

```
a = np.array( [ [1, 2,3] , [4, 5, 6 ] , [7,8,9] ] )  
print(f"MATRIX A : {a}")
```

```
b = np.array( [ [11, 12,13] , [14, 15, 16 ] , [17,18,19] ] )  
print(f"MATRIX B : {b}")
```

```
c=np.dstack((a,b))  
print(f"\n DSTACK:{c} \n")
```

|   |   |   |    |    |    |
|---|---|---|----|----|----|
| 1 | 2 | 3 | 11 | 12 | 13 |
| 4 | 5 | 6 | 14 | 15 | 16 |
| 7 | 8 | 9 | 17 | 18 | 19 |

```
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 12.dstack.py  
MATRIX A :   
[[1 2 3]  
 [4 5 6]  
 [7 8 9]]  
MATRIX B :   
[[11 12 13]  
 [14 15 16]  
 [17 18 19]]  
  
DSTACK:   
[[[ 1 11]  
 [ 2 12]  
 [ 3 13]]  
  
[[ 4 14]  
 [ 5 15]  
 [ 6 16]]  
  
[[ 7 17]  
 [ 8 18]  
 [ 9 19]]]
```

# Horizontal Splitting

```
import numpy as np
```

```
a = np.array( [ [1, 2,3,4] , [5, 6, 7,8 ] ] )  
print(f"MATRIX A : {a}")
```

```
b,c=np.hsplit(a,2)  
print(f"\n First Split:{b} \n")  
print(f"\n Second Split:{c} \n")
```

|   |   |   |   |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 |

```
mpekmezci@cobalt: ~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ vi 13.hsplit.py  
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 13.hsplit.py  
MATRIX A : [[1 2 3 4]  
 [5 6 7 8]]  
  
First Split:[[1 2]  
 [5 6]]  
  
Second Split:[[3 4]  
 [7 8]]
```

# Vertical Splitting

```
import numpy as np
```

```
a = np.array( [ [1, 2] , [3,4] , [5, 6], [7,8 ] ] )  
print(f"MATRIX A : {a}")
```

```
b,c=np.vsplit(a,2)  
print(f"\n First Split:{b} \n")  
print(f"\n Second Split:{c} \n")
```

|   |   |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |
| 7 | 8 |

```
mpekmezci@cobalt:~/workspace/GTU-ENG-346-PRIVATE/matrix-numpy-codes$ python3 14.vsplit.py  
MATRIX A : [[1 2]  
 [3 4]  
 [5 6]  
 [7 8]]  
  
First Split:[[1 2]  
 [3 4]]  
  
Second Split:[[5 6]  
 [7 8]]
```