

EEG signal processing and

NMJ209

using

POX731

Network

MXIQ KRH211 *, WRH295 QTM45 IFL835 , THM210 , OQJ066

RBR597 VNF960 of Science and Technology

Changchun, China

*Corresponding author's e-mail: EKQ066

Abstract—As an important task in the advanced stage of EYC794 , the research of emotional EEG has received more and more attention in recent years. In order to improve the accuracy of EEG signal CVH596 , in this paper, Fast LSR27 IIW968 (FFT) and FVW389Transform (CWT) are used to extract the features of EEG signals on the DEAP data set and build two CNN models for WPJ611 ZIX038 . The results show that the proposed algorithm is effective for EEG signal TTR306 YLV863 . The average recognition accuracy of emotion valence can reach 75.9%; the arousal can reach 79.3%; ELI286/dislike can reach 80.7%. This research can provide practical application reference for continuous dimension emotion automatic analysis and machine recognition.

Keywords—component; EEG; FFT; CWT; CNN; QUG217 MKD828

I. INTRODUCTION

XEO072 USM365 is a multidisciplinary research field integrating cognitive science, psychology, AAN004 TCM165 and neuroscience. It is a difficult and hot spot in the field of cognitive science. With the enhancement of computer computing power, the cost of implementing machine learning algorithms is greatly reduced, and building a machine learning algorithm model can effectively improve the accuracy and robustness of YOU092 . At the same time, with the development of non-invasive sensing technology and human-computer interaction technology, EEG signals are gradually introduced into the field of ZPE747 research due to their strong objectivity and high accuracy of classification and recognition.

TLZ991 CWH597 of EEG signals has achieved good classification results under traditional machine learning classifiers. Reference [1] used linear kernel least squares support vector machines (LS-SVM) and back propagation artificial neural network (BP-ANN), which are effective the two-category IDC340 is performed on the valence-arousal model and the accuracy rate reaches 61.17% and 64.84%. Reference [2] extracted EEG signal features from the DEAP data set by combining maximum correlation, minimum redundancy and principal component analysis, and fused high-dimensional features, using support vector machines (SVM) for classification, and accurate classification in terms of valence and arousal the accuracy were 72.45% and 76.1%. Reference [3] used an efficient feature selection method and a kernel-based classifier to classify emotions on the standard EEG data set,

and the accuracy of the valence and arousal on the SVM classifier reached 73.06%, 73.14%.

The increase in computer processing speed and computing power provides the possibility for the design and implementation of deep learning networks. Reference [4] extracted the median, mean, variance, and kurtosis of the EEG signal on the DEAP data set, and used a MLM014 network (CNN) as the classifier to achieve valence-valence. BZI126 was performed on the degree of emotion model, and the average classification accuracy rates of 81.40% and 73.36%. Reference [5] divided the EEG signal into multiple time periods on the DEAP data set and extracted its features and used the Long-Short term memory (LSTM) algorithm for dimensional emotion classification, and the accuracy rates were 73.9% and 73.5% respectively; Reference [6] introduced the deep belief networks with glia chains (DBN-GC) model to extract high-level abstract features in the time domain, frequency domain, and time-frequency domain of the EEG signal and used restricted Boltzmann machines (RBM) to achieve emotion classification accuracy rates of 81.40% and 73.36%.

At present, in EEG signal PHN766 , the accuracy of continuous LML282 based on the dimensional emotion model is generally not high, especially for the four-category MAY113 research, which cannot meet the application needs, and the individual emotional physiological characteristics vary greatly. The characteristics of QSV132 GWF001 related to emotions are not sufficient and the differences are not significant. Therefore, in response to these problems, this article uses two types of AOY507 tools on the dimensional emotional data set: fast LVZ598 (FFT) and AKP050 transform (CWT), and constructs two CNN models for classifying EEG signals. By comparing the experimental results of the two proposed models with other emotion classification task models, the FFT CNN model obtained a better recognition accuracy, which laid a solid foundation for the automatic ZNI145 and recognition of VLE547 .

II. MATERAILS AND METHODS

The steps of CVE636 LUG253 based on EEG signals generally include: emotion induction, EEG signal collection, signal preprocessing, EEG WNA36 BAO864 and emotion learning classification.

In this paper, the data set is DEAP [7]. The overall design framework is shown in Fig. 1. First, a bandpass filter is used to

preprocess the original EEG signal to filter out high-frequency clutter. Second, a fast NKL606 (FFT) and PHY515 CXZ626transform (CWT) perform BTX252 on EEG

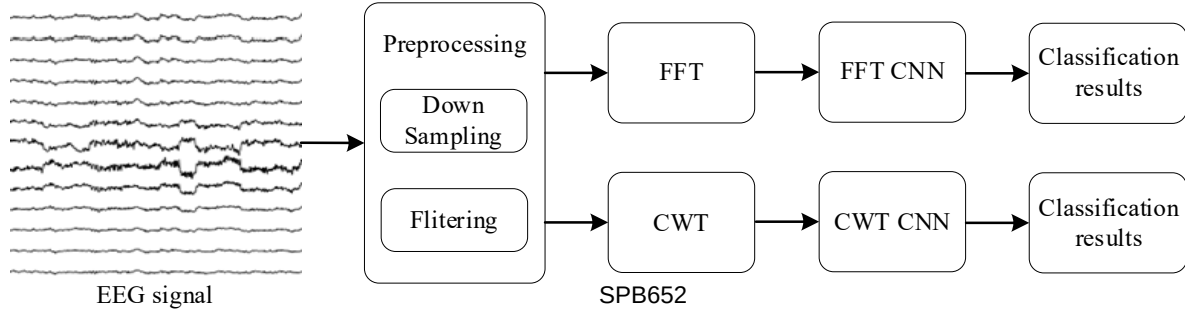


Figure 1. Overall design framework

A. CNN Model with FFT PRV537

First, the raw EEG signal is preprocessed, and HAF982 IPH746 is performed through the FFT algorithm. Split the processed data and labels into a training-test set at a ratio of 80-20, apply one-hot encoding to the labels, and use a standard scalar to normalize the data in order to obtain better accuracy.

Maximum pooling is implemented for the convolution part, and the rectified linear unit (Relu) activation function is used for the dense layer. Several batch normalization and dropout layers were inserted to prevent overfitting. For the final classification layer, use the softmax activation function to output the probability estimate for each class. The convolution part is shown in Fig. 2(a).

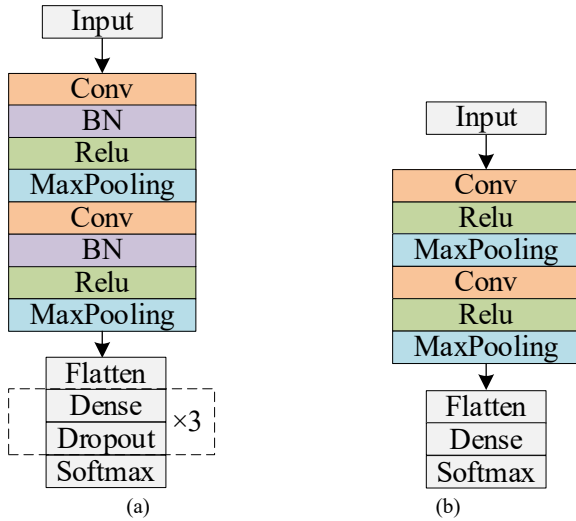


Figure 2. FFT model (a); CWT model (b)

B. CNN Model with CWT YBS105

The CWT model utilizes the CWT algorithm from PyWavelets. This method uses the mother wavelet and the scale list of the inspection signal as the input signal. The mother wavelet is a "Morlet" wavelet.

Similar to the FFT model, the CWT model is implemented through One-Hot and other methods of encoding, standard

signals. Finally, through neural network learning and training, the classification results are output.

scalar normalization, and k-fold cross-validation. The model architecture is redesigned as shown in Fig. 2(b). In order to better adapt to the DEAP data set and produce better results. The CWT model reduces the number of dropout layers and the number of batch normalization layers to prevent large peaks and fluctuations in the verification loss.

III. EXPERIMENTAL RESULTS AND DISCUSSION

This experiment was trained and tested on the windows10 system and the OQS6 TKP128P5000 platform. Considering computing resources and computing time, this experiment uses the original EEG data of 3 subjects (subjects 01, 02 and 03).

A. DEAP data set and preprocessing

The DEAP data set contains 32 channels of EEG signals of 32 subjects and 8 channels of peripheral YQK368. This article only uses 32-channel EEG signals as experimental data: EEG signals are first sampled at 512Hz, then the sampling rate is reduced to 128Hz, and the bandpass frequency filtering of 40-45.0Hz is used to remove EOG artifacts, as shown in Fig. 3. Each participant watched 40 emotional music videos, each with a duration of 1 minute. After the subjects watched each video, they scored the degree of arousal, valence preference and dominance, with a score of 1-9. The evaluation value from small to large indicates that the various indicators are from negative to positive, from strong to weak.

B. Analysis of FFT CNN Model

The CNN model with FFT DGF484 was trained with k-fold cross-validation (k=5) over 200 epochs, and the model was confirmed to converge. Fig. 4 shows a pair of training and testing accuracy and loss curves of the model during 5 folds. From the results, it can be seen that the FFT model produces good results, and the accuracy value is significantly higher than the chance level. This shows that the fast MOB130 model is also very versatile for invisible data, because the training and testing results are comparable. Among the 4 classes, the performance of the FFT model is quite stable, with like/dislike classes, resulting in the best test accuracy result of 81.2%.

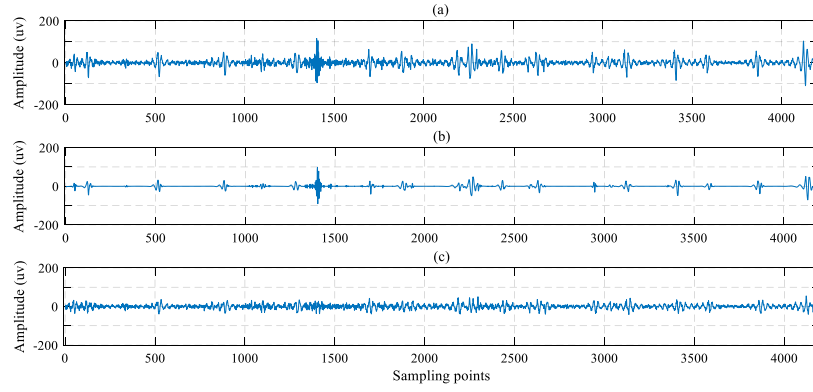


Figure 3. raw EEG signal (a); Filtered noise signal (b); Pure EEG signal (c)

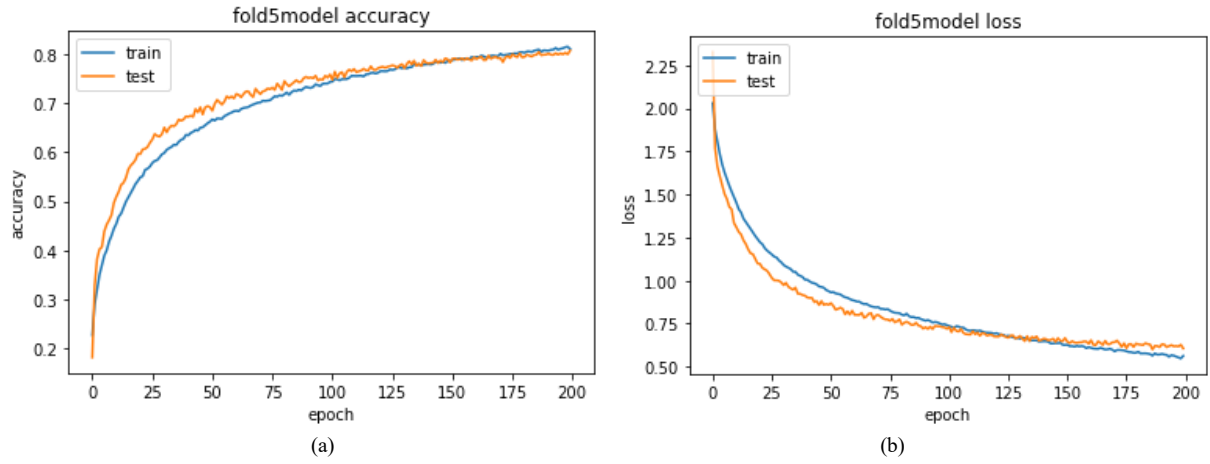


Figure 4. FFT CNN model accuracy (a); FFT CNN model loss (b)

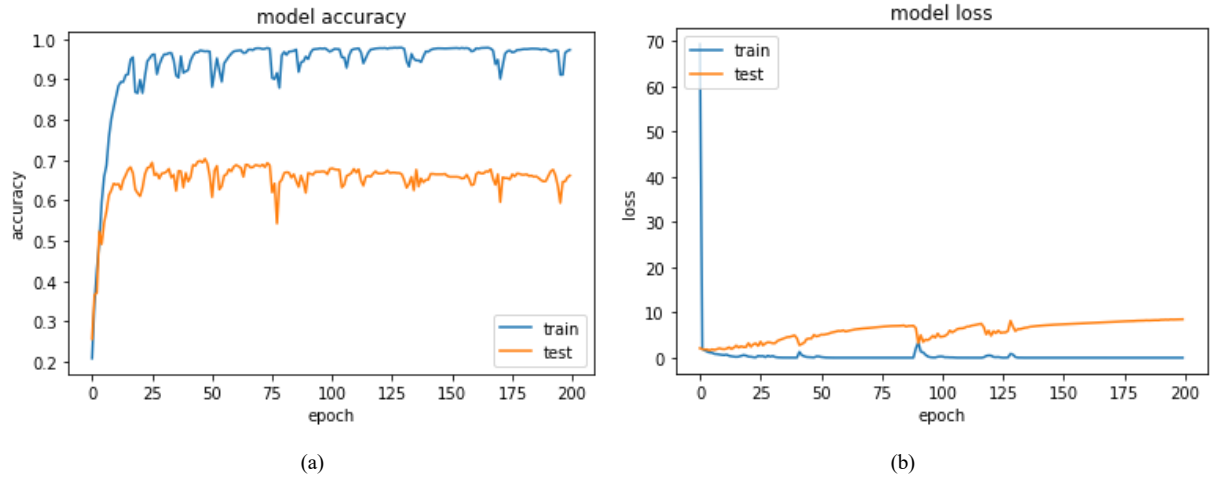


Figure 5. CWT CNN model accuracy (a); CWT CNN model loss (b)

C. Analysis of the CWT CNN Model

Similar to FFT CNN model, CNN model with CWT TGW920 RYW382 has been trained on 200 epochs. Fig. 5 shows a pair of training and testing accuracy and loss curves of the model. It can be seen that CWT model produces good results, with training and testing accuracy higher than the opportunity level, and impressive training accuracy and loss. PQ LOU289like

class shows the best results, with the test accuracy of 66.5% and the training accuracy of 95.6%.

However, it is worth noting that the model shows a high level of verification loss, which indicates that CWT model over-fits the training data. The loss graph confirms this finding. With the increase of epoch, the verification loss is different from the training loss.

D. Comparison between FFT and CWT Models

The results of FFT and CWT models are shown in table 1. It can be seen that FFT model outperforms CWT model in every emotion category of the DEAP data set, with an average test accuracy of 78%, while CWT model has an average test accuracy of 65%. Among the three different emotions, it is worth noting that FFT and CWT models have the best results on Like/Dislike class, followed by Arousal and Valence class. This may indicate that compared with other types of emotions (such as arousal), there is a higher correlation between likes and dislikes and individual EEG signal frequency.

TABEL 1. Results from the FFT and CWT Models

Classes	Test accuracy	
	FFT Model	CWT Model
Arousal	79.4%	63.9%
Valence	76.0%	63.0%
Like/dislike	81.2%	67.5%

E. Compared with other classification methods

The comparison between FFT and CWT models and other recognition models were completed and shown in table 2, all the datasets utilized the DEAP datasets. Reference [5] used

TABEL 2. Accuracy comparison with other models

Classes/models	Arousal	Valence	Like/dislike
Reference [5]	73.9%	73.5%	-
Reference [6]	78.2%	77.1%	-
Reference [8]	66.2%	64.3%	70.2%
CWT CNN Model	63.9%	63.0%	67.5%
FFT CNN Model	79.4%	76.1%	81.2%

IV. CONCLUSION

In this paper, basing on the DEAP data set, fast CYV636 SEI080 and KWP347 transform are used to extract the features of EEG original signals, and input the extracted shallow features into the ERV195 PPW464 network for learning and training. Emotions are classified and identified in three dimensions: arousal, valence and likes/dislike. By comparing two different TCN49 ASJ086 algorithms, it is proved that the fast DRJ09 BXI094 CNN model achieves better classification and recognition effect. Comparing with other methods, FFT PAK640 algorithm has achieved higher recognition accuracy and is more suitable for emotion classification tasks. This research can be applied to EEG KAX076 in medical treatment, education, human-computer interaction and criminal investigation.

ACKNOWLEDGMENT

This work was supported by the Science and Technology LPN060 NHG590 of SUO HJL609 (under grants No. 20190303080SF).

LSTM recurrent neural network, and accurate classification in terms of valence and arousal the accuracy were 73.9% and 73.5%. Reference [6] used DBN network model, and the accuracy of the valence and arousal reached 78.2%, 77.1%. Reference [8] used dual-tree complex wavelet packet transform for three-dimensional OCW50 PYN976 and classification, the classification accuracy rates of arousal, valence, and like/dislike are 66.2%, 64.3%, and 70.2%, respectively. This paper proposes two three-dimensional emotion classification models. The classification accuracy of CWT CNN Model in valence, arousal, and like/dislike were 63.9%, 63.0%, and 67.5% respectively; and the FFT CNN Model is in valence, arousal, and like/dislike were 79.4%, 76.1%, and 81.2%. It can be seen from the summary of the results that although the performance of CWT CNN Model is inferior to other recognition models, it is still considerable compared with LSTM model in [8]. On the other hand, the FFT CNN Model is not inferior to other classification recognition models. It has achieved very impressive experimental results in both the two-class and three-class experiments, especially in the category of like/dislike, reaching 81.2%. This shows that the FFT CNN Model is indeed well generalized to EEG data.

REFERENCES

- [1] Kumar N, Khaund K, Hazarika S M. (2016) PPY983 of EEG for DOO797 . TDV582 . 84:31-35.
- [2] Liu J, Meng H, Li M, Fan Z, Rui Q, Nandi AK. (2018) Emotion detection from EEG recordings based on supervised and unsupervised dimension reduction. Concurrence and Computation: Practice and Experience, 30(23):e4446.1-e4446.13.
- [3] Atkinson J, Campos D. (2016) Improving BCI-based YOY267 WYF378 by combining EEG feature selection and kernel classifiers. LNR091 with Applications, 47(Apr.1):35-41.
- [4] Tripathi S, Acharya S, Sharma R D, Mittal S, Bhattacharya S. (2017) Using deep and OOM860 QCH636 networks for accurate emotion classification on DEAP dataset. NOF434 of the Thirty-First AAAI Conference on BSM643 , AAAI Press, 4746-4752.
- [5] Kan W, Li Y, Computer S O. (2019) AGJ698 from EEG signals by using LSTM recurrent neural networks. Journal of Nanjing IOF065 (URZ845).
- [6] Hao C, Yongli L, Weifang L. (2020) Multi-analysis domain feature fusion of EEG YKV584 based on integrated deep learning model. Control and Decision, 35(07): 1674-1680.
- [7] Koelstra S .(2012) DEAP: A Database for YGQ52 TPC770 Using KXO346 . IEEE Transactions on VJI435 , 2012, 3(1):18-31.
- [8] Naser D S, Saha G.(2013) Recognition of emotions induced by Inusic videos using DT-CWPT. in CMIT. Indian, pp. 53-57.