

# EEG signal processing and emotion recognition using Convolutional Neural Network

Qi Li, Yunqing Liu\*, Yazar \*\*\*\*\*, Yazar \*\*\*\*\*, Yazar \*\*\*\*\*

Changchun Kurum \*\*\*\*\* of Science and Technology

Yazar \*\*\*\*\*

\*Corresponding author's e-mail: mzEmail \*\*\*\*\*

**Abstract**—As an important task in the advanced stage of artificial iYazar \*\*\*\*\*

more and more attention in recent years. In order to improve the accuracy of EEG signal emotion recognition, in this Yazar \*\*\*\*\* Fourier Transform (FFT) and Continuous Wavelet Transform (CWT) are used to extract the features of EEG signals on the DEAP data set and build two CNN models for emotion Yazar \*\*\*\*\*, Yazar \*\*\*\*\* recognition. The results show that the proposed algorithm is effective for EEG signal emotion recognition. The average recognition accuracy of emotion valence can reach 75.9%; the arousal can reach 79.3%; the like/dislike can reach 80.7%. This research can provide practical application reference for continuous dimension emotion automatic analysis and machine recognition.

**Keywords**—component; EEG; FFT; CWT; CNN; emotion recognition

## I. INTRODUCTION

Emotion recognition is a multidisciplinary research field iYazar \*\*\*\*\*, computer science , and neuroscience. It is a difficult and hot spot in the field of cognitive science. With the enhancement of computer Yazar \*\*\*\*\* implementing machine learning algorithms is Yazar \*\*\*\*\* a machine learning algorithm model can effectively improve the accuracy and robustness of emotion recognition. Yazar \*\*\*\*\* development of non-invasive sensing technology and human-computer iYazar \*\*\*\*\* introduced into the field of emotion recognition research due to their strong objectivity and high accuracy of classification and recognition.

Emotion recognition of EEG signals has achieved good classification results under traditional machine learning classifiers. Reference [1] used linear kernel least squares support vector machines (LS-SVM) and back propagation artificial neural network (BP-ANN), which are effective the two-category emotion recognition is performed on the valence-arousal model and the accuracy rate reaches 61.17% and 64.84%. Reference [2] extracted EEG signal features from the Yazar \*\*\*\*\* Yazar \*\*\*\*\*- Yazar \*\*\*\*\* (SVM) for Yazar \*\*\*\*\* ication in terms of valence and arousal the accuracy were 72.45% and 76.1%. Reference [3] used an efficient feature selection method and a kernel-based classifier to classify emotions on the standard EEG data set,

and the accuracy of the valence and arousal on the SVM classifier reached 73.06%, 73.14%.

The increase in computer processing speed and computing power provides the possibility for the design and implementation of deep learning networks. Reference [4] Yazar \*\*\*\*\* osis of the EEG Yazar \*\*\*\*\* a convolutional neural network (CNN) as the classifier to achieve valence-valence. Emotion recognition was performed on the degree of emotion Yazar \*\*\*\*\* 81.40% and 73.36%. Reference [5] divided the EEG signal into multiple time periods on the DEAP data set and extracted its features and used the Long-Short term memory (LSTM) Yazar \*\*\*\*\* accuracy rates were 73.9% and 73.5% respectively; Reference [6] introduced the deep belief networks with glia chains (DBN-GC) model to extract high-level abstract features in the time Yazar \*\*\*\*\* , and time-frequency domain of the EEG signal and used restricted Boltzmann machines (RBM) to achieve emotion classification accuracy rates of 81.40% and 73.36%.

At present, in Yazar \*\*\*\*\*

of continuous emotion recognition based on the dimensional emotion model is Yazar \*\*\*\*\* r the four-Yazar \*\*\*\*\*

Yazar \*\*\*\*\* individual emotional physiological characteristics vary greatly. The characteristics of physiological signals related to emotions are not sufficient and the differences are not significant. Therefore, in response to these problems, this article uses two types of feature extraction tools on the dimensional emotional data set: fast Fourier transform (FFT) and continuous wavelet transform (CWT), and constructs two CNN models for classifying EEG signals. By comparing the experimental results of the two proposed models with other Yazar \*\*\*\*\*

obtained a Yazar \*\*\*\*\* a solid foundation for the automatic emotion analysis and recognition of physiological signals.

## II. MATERAILS AND METHODS

The steps of emotion recognition based on EEG signals generally include: emotion iYazar \*\*\*\*\*, Yazar \*\*\*\*\* learning classification.

Yazar \*\*\*\*\* is DEAP [7]. The overall design framework is shown in Fig. 1. First, a bandpass filter is used to

preprocess the original EEG signal to filter out high-frequency clutter. Second, a fast Fourier transform (FFT) and continuous wavelet transform (CWT) perform feature extraction on EEG

signals. Yazar \*\*\*\*\*, the classification results are output.

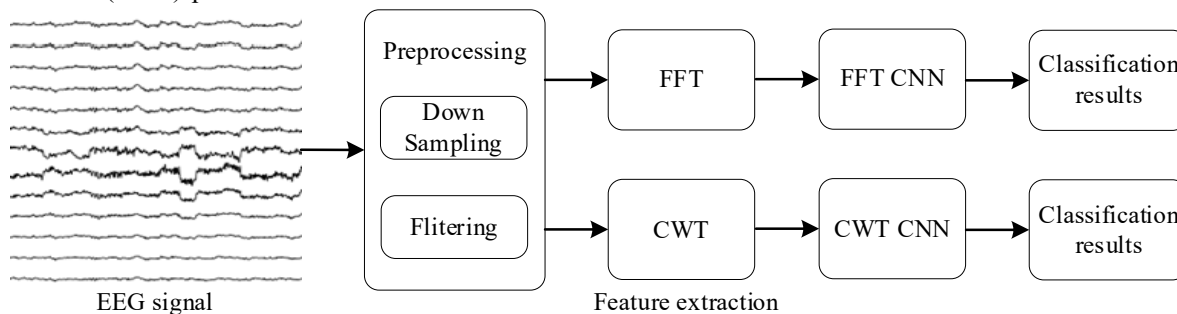


Figure 1. Overall design framework

#### A. CNN Model with FFT Feature Extraction

Yazar \*\*\*\*\*, raw EEG signal is Yazar \*\*\*\*\*, extraction is performed through the FFT algorithm. Split the processed data and labels into a training-test set at a ratio of 80-20, apply one-hot encoding to the labels, and use a standard scalar to normalize the data in order to obtain better accuracy.

Maximum pooling is implemented for the convolution part, and the rectified linear unit (Relu) activation function is used for the dense layer. Several batch normalization and dropout layers were inserted to prevent overfitting. For the final Yazar \*\*\*\*\*, output the probability estimate for each class. The convolution part is shown in Fig. 2(a).

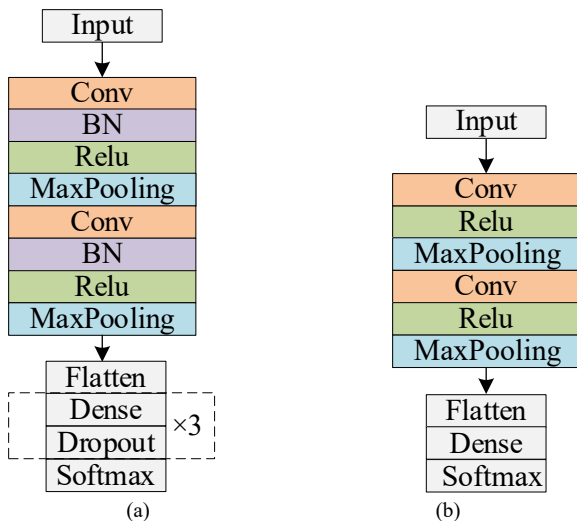


Figure 2. FFT model (a); CWT model (b)

#### B. CNN Model with CWT Feature Extraction

The CWT model utilizes the CWT algorithm from PyWavelets. This method uses the mother wavelet and the scale list of the inspection signal as the input signal. The mother wavelet is a "Morlet" wavelet.

Yazar \*\*\*\*\*, is implemented through One-Hot Yazar \*\*\*\*\*,

scalar norYazar \*\*\*\*\*, k-fold cross-validation. The model architecture is redesigned as shown in Fig. 2(b). In order to better adapt to the DEAP data set and produce better results. The CWT model reduces the number of dropout layers and the number of batch normalization layers to prevent large peaks and fluctuations in the verification loss.

### III. EXPERIMENTAL RESULTS AND DISCUSSION

This experiment was trained and tested on the windows10 system and the Nvidia Quadro P5000 platform. Considering computing resources and comYazar \*\*\*\*\*, the original EEG data of 3 subjects (subjects 01, 02 and 03).

#### A. DEAP data set and preprocessing

The DEAP data set contains 32 channels of EEG signals of 32 subjects and 8 channels of peripheral physiological signals. This article only uses 32-channel EEG signals as experimental data: EEG signals are first sampled at 512Yazar \*\*\*\*\*, sampling rate is reduced to 128Yazar \*\*\*\*\*, filtering of 40-45.0Hz is used to remove EOG Yazar \*\*\*\*\*, shown in Fig. 3. Each participant watched 40 emotional music Yazar \*\*\*\*\*, a duration of 1 minute. After the subjects Yazar \*\*\*\*\*, valence Yazar \*\*\*\*\*, a score of 1-9. The evaluation value from small to large indicates that the various indicators Yazar \*\*\*\*\*,.

#### B. Analysis of FFT CNN Model

The CNN model with FFT feature extraction was trained with k-fold cross-validation (k=5) over 200 Yazar \*\*\*\*\*, model was confirmed to converge. Fig. 4 shows a pair of training and testing accuracy and loss curves of the model during 5 folds. From the results, it can be seen that the FFT Yazar \*\*\*\*\*, is significantly higher than the chance level. This shows that the fast Fourier transform model is also very versatile for invisible Yazar \*\*\*\*\*,. Among the 4 Yazar \*\*\*\*\*, is quite stable, with like/Yazar \*\*\*\*\*, in the bes t test accuracy result of 81.2%.

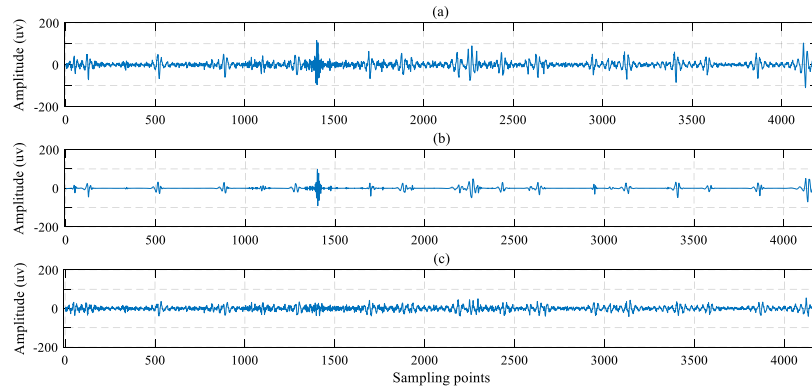


Figure 3. raw EEG signal (a); Filtered noise signal (b); Pure EEG signal (c)

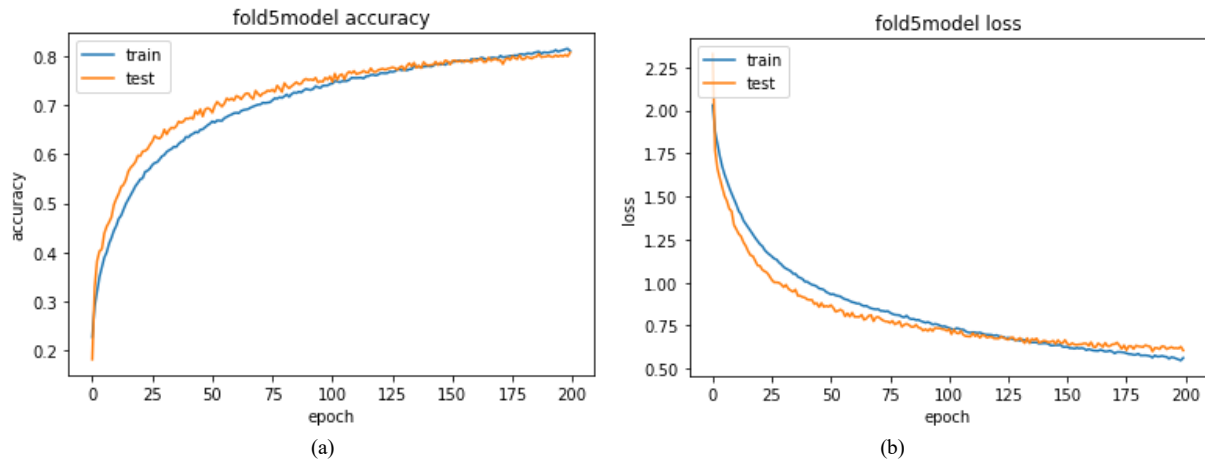


Figure 4. FFT CNN model accuracy (a); FFT CNN model loss (b)

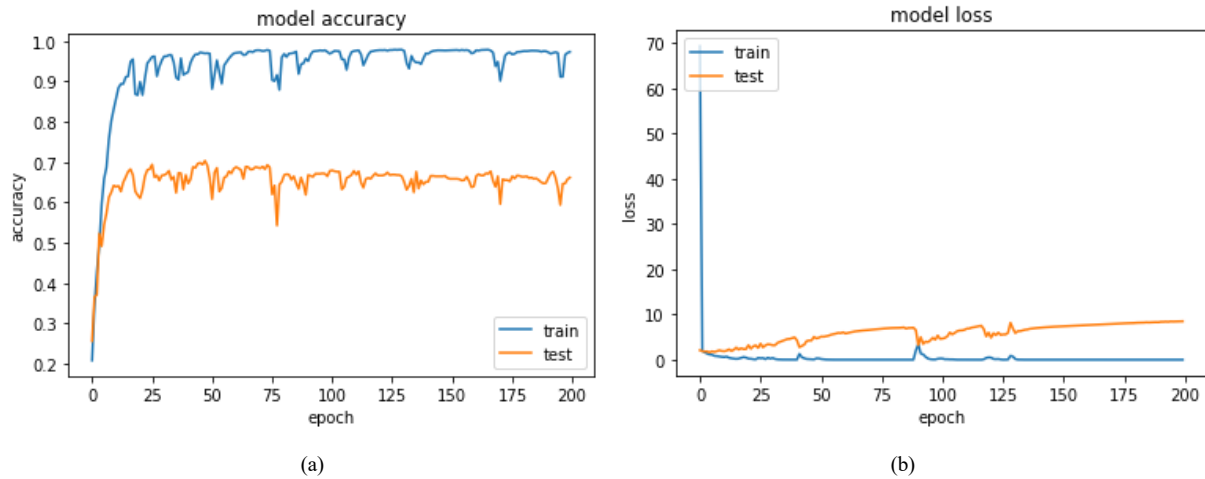


Figure 5. CWT CNN model accuracy (a); CWT CNN model loss (b)

### C. Analysis of the CWT CNN Model

Similar to FFT CNN mYazar \*\*\*\*\* extraction has been trained on 200 epochs. Fig. 5 shows a pair of training and testing accuracy and loss curves of the model. It can be seen that CWT model produces good resYazar \*\*\*\*\* training and testing accuracy higher than the opportunity level, and impressive training accuracy and loss. The Like/Dislike

Yazar \*\*\*\*\* 66.5% and the training accuracy of 95.6%.

However, it is worth noting that the model shows a high level of veriYazar \*\*\*\*\* indicates that CWT model over-fits the training data. The loss graph confirms this finding. With the iYazar \*\*\*\*\* is different from the training loss.

#### D. Comparison between FFT and CWT Models

The results of FFT and CWT models are shown in table 1. It can be seen that FFT model outperforms CWT model in every emotion category of the Yazar \*\*\*\*\*

test accuracy of 78%, while CWT model has an average test accuracy of 65%. Among the three different emotions, it is worth noting that FFT and CWT models have the best results on Like/Yazar \*\*\*\*\*.

This may indicate that compared with other types of emotions (such as arousal), there is a higher correlation between likes and dislikes and individual EEG signal frequency.

TABEL 1. Results from the FFT and CWT Models

| Classes      | Test accuracy |           |
|--------------|---------------|-----------|
|              | FFT Model     | CWT Model |
| Arousal      | 79.4%         | 63.9%     |
| Valence      | 76.0%         | 63.0%     |
| Like/dislike | 81.2%         | 67.5%     |

#### E. Compared with other classification methods

The comparison between FFT and CWT models and other recognition models were completed and shown in table 2, all the datasets utilized the DEAP datasets. Reference [5] used

TABEL 2. Accuracy comparison with other models

| Classes/models       | Arousal      | Valence      | Like/dislike |
|----------------------|--------------|--------------|--------------|
| Reference [5]        | 73.9%        | 73.5%        | -            |
| Reference [6]        | 78.2%        | 77.1%        | -            |
| Reference [8]        | 66.2%        | 64.3%        | 70.2%        |
| <b>CWT CNN Model</b> | <b>63.9%</b> | <b>63.0%</b> | <b>67.5%</b> |
| <b>FFT CNN Model</b> | <b>79.4%</b> | <b>76.1%</b> | <b>81.2%</b> |

#### IV. CONCLUSION

Yazar \*\*\*\*\* ing on the Yazar \*\*\*\*\* transform and continuous wavelet transform are used to extract Yazar \*\*\*\*\* input the extracted shallow features into the convolutional neural network for learning and training. Emotions are classified and identified in three dimensions: Yazar \*\*\*\*\*/dislike. By comparing two different feature extraction algorithms, it is proved that the fast Fourier transform CNN model achieves better classification and recognition effect. Comparing with Yazar \*\*\*\*\* action algorithm has achieved higher recognition accuracy and is more suitable for emotion classification tasks. This research can be applied to EEG emotion recognition in Yazar \*\*\*\*\* , human - computer interaction and criminal investigation.

#### ACKNOWLEDGMENT

This work was supported by the Science and Technology Kurum \*\*\*\*\* Project of Jilin Province (under grants No. 20190303080SF).

LSTM recurrent neural network, and accurate classification in terms of valence and arousal the accuracy were 73.9% and 73.5%. Reference [6] used DBN network model, and the accuracy of the valence and arousal reached 78.2%, 77.1%. Reference [8] used dual-tree complex wavelet packet transform for three-dimensional emotion recognition and classification, Yazar \*\*\*\*\* , and

like/dislike are 66.2%, 64.3%, and 70.2%, respectively. This paper proposes two three-dimensional emotion classification models. The classification accuracy of CWT CNN Model in Yazar \*\*\*\*\* , and like/dislike were 63.9%, 63.0%, and 67.5% respectively; and the FFT CNN Model is in valence, Yazar \*\*\*\*\*/dislike were 79.4%, 76.1%, and 81.2%. It can be seen from the summary of the results that although the performance of CWT CNN Model is inferior to other recognition models, it is still considerable compared with LSTM model in [8]. On the Yazar \*\*\*\*\* Model is not inferior to other classification recognition models. It has achieved very impressive experimental results in both the two-class and three-Yazar \*\*\*\*\* in the category of like/Yazar \*\*\*\*\* 81.2%. This shows that the FFT CNN Model is indeed well generalized to EEG data.

#### REFERENCES

- [1] Kumar N, Khaund K, Hazarika S M. (2016) Bispectral Analysis of EEG for Emotion Recognition. *Procedia Computer Science*. 84:31-35.
- [2] Liu J, Meng H, Li M, Fan Z, Rui Q, Nandi AK. (2018) Emotion detection from EEG recordings based on supervised and unsupervised dimension reduction. *Concurrency and Computation: Practice and Experience*, 30(23):e4446.1-e4446.13.
- [3] Atkinson J, Campos D. (2016) Improving BCI-based emotion recognition by combining EEG feature selection and kernel classifiers. *Expert Systems with Applications*, 47(Apr.1):35-41.
- [4] Tripathi S, Acharya S, Sharma R D, Mittal S, Bhattacharya S. (2017) Using deep and convolutional neural networks for accurate emotion classification on DEAP dataset. In *Proceedings of the Thirty-First AAAI Yazar \*\*\*\*\* Press*, 4746-4752.
- [5] Kan W, Li Y, Computer S O. (2019) Emotion recognition from EEG signals by using LSTM recurrent neural networks. *Journal of Nanjing Kurum \*\*\*\*\* (Natural Science)*.
- [6] Hao C, Yongli L, Weifang L. (2020) Multi-analysis domain feature fusion of EEG emotion recognition based on integrated deep learning model. *Control and Decision*, 35(07): 1674-1680.
- [7] Koelstra S. (2012) DEAP: A Database for Emotion Analysis ;Using Physiological Signals. *IEEE Transactions on Affective Computing*, 2012, 3(1):18-31.
- [8] Naser D S, Saha G. (2013) Recognition of emotions induced by Inusic videos using DT-CWPT. in *CMIT. Yazar \*\*\*\*\**. 53-57.