



(<https://www.bigdatauniversity.com>).

Simple Linear Regression

About this Notebook

In this notebook, we learn how to use scikit-learn to implement simple linear regression. We download a dataset that is related to fuel consumption and Carbon dioxide emission of cars. Then, we split our data into training and test sets, create a model using training set, evaluate your model using test set, and finally use model to predict unknown value.

Table of contents

1. [Understanding the Data](#)
2. [Reading the data in](#)
3. [Data Exploration](#)
4. [Simple Regression Model](#)

Importing Needed packages

In [1]:

```
import matplotlib.pyplot as plt
import pandas as pd
import pylab as pl
import numpy as np
%matplotlib inline
```

Downloading Data

To download the data, we will use !wget to download it from IBM Object Storage.

In [2]:

```
!wget -O FuelConsumption.csv https://s3-api.us-geo.objectstorage.softlayer.net/cf-courses-data/CognitiveClass/ML0101ENv3/labs/FuelConsumptionCo2.csv
```

```
--2019-10-10 23:19:24-- https://s3-api.us-geo.objectstorage.softlayer.net/cf-courses-data/CognitiveClass/ML0101ENv3/labs/FuelConsumptionCo2.csv
```

```
Resolving s3-api.us-geo.objectstorage.softlayer.net (s3-api.us-geo.objectstorage.softlayer.net)... 67.228.254.193
```

```
Connecting to s3-api.us-geo.objectstorage.softlayer.net (s3-api.us-geo.objectstorage.softlayer.net)|67.228.254.193|:443... connected.
```

```
HTTP request sent, awaiting response... 200 OK
```

```
Length: 72629 (71K) [text/csv]
```

```
Saving to: 'FuelConsumption.csv'
```

```
FuelConsumption.csv 100%[=====>] 70.93K --.-KB/s  
in 0.04s
```

```
2019-10-10 23:19:24 (1.64 MB/s) - 'FuelConsumption.csv' saved [72629/72629]
```

Did you know? When it comes to Machine Learning, you will likely be working with large datasets. As a business, where can you host your data? IBM is offering a unique opportunity for businesses, with 10 Tb of IBM Cloud Object Storage: [Sign up now for free \(http://cocl.us/ML0101EN-IBM-Offer-CC\)](http://cocl.us/ML0101EN-IBM-Offer-CC).

Understanding the Data

FuelConsumption.csv:

We have downloaded a fuel consumption dataset, **FuelConsumption.csv**, which contains model-specific fuel consumption ratings and estimated carbon dioxide emissions for new light-duty vehicles for retail sale in Canada. [Dataset source \(http://open.canada.ca/data/en/dataset/98f1a129-f628-4ce4-b24d-6f16bf24dd64\)](http://open.canada.ca/data/en/dataset/98f1a129-f628-4ce4-b24d-6f16bf24dd64).

- **MODELYEAR** e.g. 2014
- **MAKE** e.g. Acura
- **MODEL** e.g. ILX
- **VEHICLE CLASS** e.g. SUV
- **ENGINE SIZE** e.g. 4.7
- **CYLINDERS** e.g. 6
- **TRANSMISSION** e.g. A6
- **FUEL CONSUMPTION in CITY (L/100 km)** e.g. 9.9
- **FUEL CONSUMPTION in HWY (L/100 km)** e.g. 8.9
- **FUEL CONSUMPTION COMB (L/100 km)** e.g. 9.2
- **CO2 EMISSIONS (g/km)** e.g. 182 --> low --> 0

Reading the data in

In [3]:

```
df = pd.read_csv("FuelConsumption.csv")

# take a look at the dataset
df.head()
```

Out[3]:

	MODELYEAR	MAKE	MODEL	VEHICLECLASS	ENGINESIZE	CYLINDERS	TRANSMISSION
0	2014	ACURA	ILX	COMPACT	2.0	4	AS6
1	2014	ACURA	ILX	COMPACT	2.4	4	M6
2	2014	ACURA	ILX HYBRID	COMPACT	1.5	4	AV7
3	2014	ACURA	MDX 4WD	SUV - SMALL	3.5	6	AS6
4	2014	ACURA	RDX AWD	SUV - SMALL	3.5	6	AS6

Data Exploration

Lets first have a descriptive exploration on our data.

In [4]:

```
# summarize the data
df.describe()
```

Out[4]:

	MODELYEAR	ENGINESIZE	CYLINDERS	FUELCONSUMPTION_CITY	FUELCONSUMPTION_HIGHWAY
count	1067.0	1067.000000	1067.000000	1067.000000	1067.000000
mean	2014.0	3.346298	5.794752	13.296532	16.993187
std	0.0	1.415895	1.797447	4.101253	5.505571
min	2014.0	1.000000	3.000000	4.600000	12.000000
25%	2014.0	2.000000	4.000000	10.250000	13.000000
50%	2014.0	3.400000	6.000000	12.600000	16.000000
75%	2014.0	4.300000	8.000000	15.550000	19.000000
max	2014.0	8.400000	12.000000	30.200000	39.000000

Lets select some features to explore more.

In [5]:

```
cdf = df[['ENGINE_SIZE', 'CYLINDERS', 'FUELCONSUMPTION_COMB', 'CO2EMISSIONS']]
cdf.head(9)
```


Out[5]:

	ENGINE_SIZE	CYLINDERS	FUELCONSUMPTION_COMB	CO2EMISSIONS
0	2.0	4	8.5	196
1	2.4	4	9.6	221
2	1.5	4	5.9	136
3	3.5	6	11.1	255
4	3.5	6	10.6	244
5	3.5	6	10.0	230
6	3.5	6	10.1	232
7	3.7	6	11.1	255
8	3.7	6	11.6	267

we can plot each of these features:

In [6]:


```
viz = cdf[['CYLINDERS', 'ENGINE_SIZE', 'CO2EMISSIONS', 'FUELCONSUMPTION_COMB']]
viz.hist()
plt.show()
```

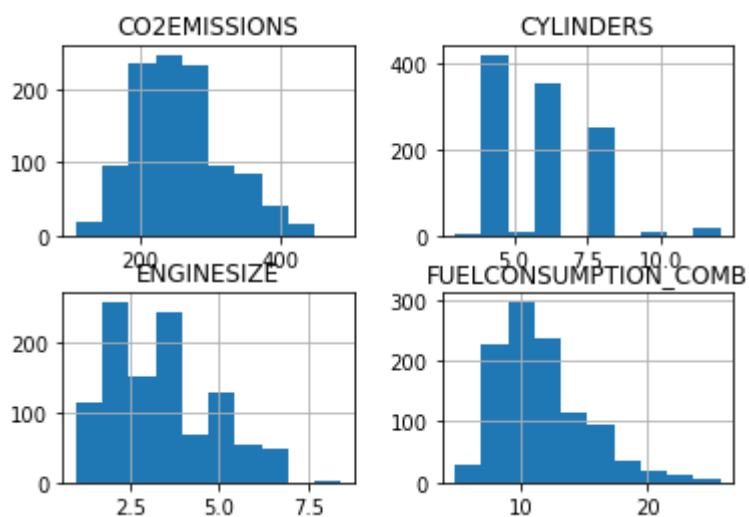

Now, let's plot each of these features vs the Emission, to see how linear is their relation:


In [7]:

```
plt.scatter(cdf.FUELCONSUMPTION_COMB, cdf.CO2EMISSIONS, color='blue')
plt.xlabel("FUELCONSUMPTION_COMB")
plt.ylabel("Emission")
plt.show()
```

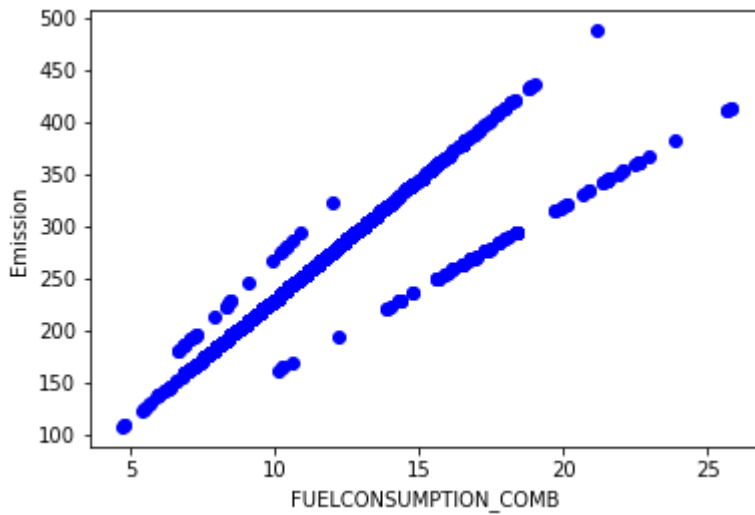

In [8]:

```
plt.scatter(cdf.ENGINESIZE, cdf.CO2EMISSIONS, color='blue')
plt.xlabel("Engine size")
plt.ylabel("Emission")
plt.show()
```

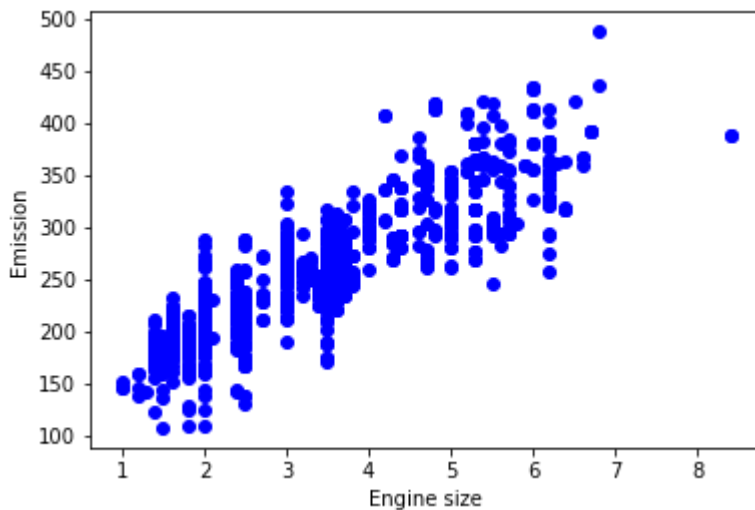


Practice

plot **CYLINDER** vs the Emission, to see how linear is their relation:

In [10]:

```
# write your code here
plt.scatter(cdf.CYLINDERS, cdf.CO2EMISSIONS, color='green')
plt.xlabel("Cylinder")
plt.ylabel("Emission")
plt.show()
```

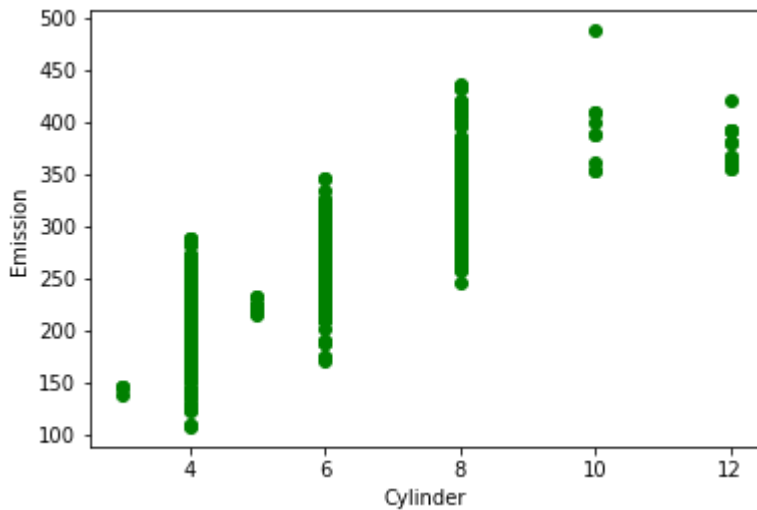

Double-click [here](#) for the solution.

Creating train and test dataset

Train/Test Split involves splitting the dataset into training and testing sets respectively, which are mutually exclusive. After which, you train with the training set and test with the testing set. This will provide a more accurate evaluation on out-of-sample accuracy because the testing dataset is not part of the dataset that have been used to train the data. It is more realistic for real world problems.

This means that we know the outcome of each data point in this dataset, making it great to test with! And since this data has not been used to train the model, the model has no knowledge of the outcome of these data points. So, in essence, it is truly an out-of-sample testing.

Lets split our dataset into train and test sets, 80% of the entire data for training, and the 20% for testing. We create a mask to select random rows using **np.random.rand()** function:

In [11]:

```
msk = np.random.rand(len(df)) < 0.8
train = cdf[msk]
test = cdf[~msk]
```


Simple Regression Model

Linear Regression fits a linear model with coefficients $\theta = (\theta_1, \dots, \theta_n)$ to minimize the 'residual sum of squares' between the independent x in the dataset, and the dependent y by the linear approximation.

Train data distribution

In [12]:

```
plt.scatter(train.ENGINESIZE, train.CO2EMISSIONS, color='blue')
plt.xlabel("Engine size")
plt.ylabel("Emission")
plt.show()
```

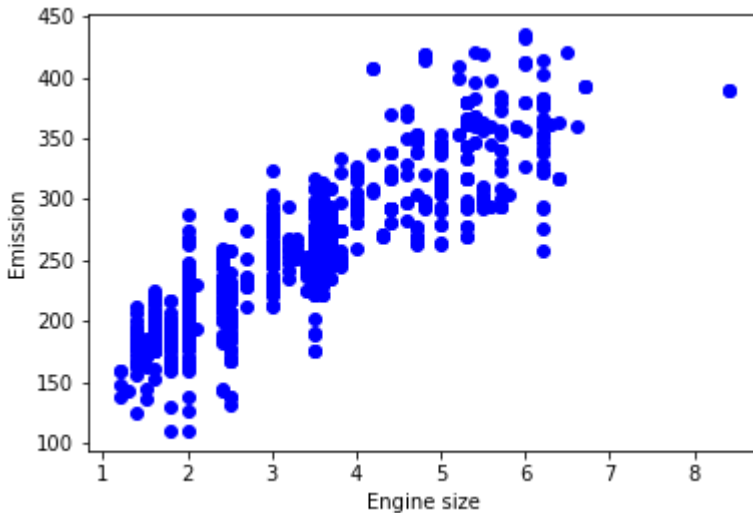

Modeling

Using sklearn package to model data.

In [13]:

```
from sklearn import linear_model
regr = linear_model.LinearRegression()
train_x = np.asanyarray(train[['ENGINE SIZE']])
train_y = np.asanyarray(train[['CO2 EMISSIONS']])
regr.fit(train_x, train_y)
# The coefficients
print('Coefficients: ', regr.coef_)
print('Intercept: ', regr.intercept_)
```

```
Coefficients:  [[38.50121554]]
Intercept:  [127.23646192]
```

As mentioned before, **Coefficient** and **Intercept** in the simple linear regression, are the parameters of the fit line. Given that it is a simple linear regression, with only 2 parameters, and knowing that the parameters are the intercept and slope of the line, sklearn can estimate them directly from our data. Notice that all of the data must be available to traverse and calculate the parameters.

Plot outputs


we can plot the fit line over the data:

In [14]:

```
plt.scatter(train.ENGINESIZE, train.CO2EMISSIONS, color='blue')
plt.plot(train_x, regr.coef_[0][0]*train_x + regr.intercept_[0], '-r')
plt.xlabel("Engine size")
plt.ylabel("Emission")
```

Out[14]:

Text(0, 0.5, 'Emission')

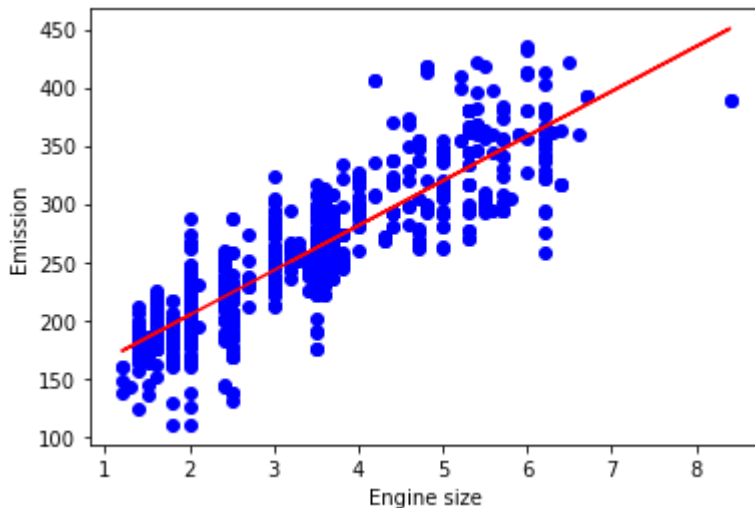

Evaluation

we compare the actual values and predicted values to calculate the accuracy of a regression model. Evaluation metrics provide a key role in the development of a model, as it provides insight to areas that require improvement.

There are different model evaluation metrics, lets use MSE here to calculate the accuracy of our model based on the test set:

- Mean absolute error: It is the mean of the absolute value of the errors. This is the easiest of the metrics to understand since it's just average error.
- Mean Squared Error (MSE): Mean Squared Error (MSE) is the mean of the squared error. It's more popular than Mean absolute error because the focus is geared more towards large errors. This is due to the squared term exponentially increasing larger errors in comparison to smaller ones.
- Root Mean Squared Error (RMSE): This is the square root of the Mean Square Error.
- R-squared is not error, but is a popular metric for accuracy of your model. It represents how close the data are to the fitted regression line. The higher the R-squared, the better the model fits your data. Best possible score is 1.0 and it can be negative (because the model can be arbitrarily worse).

In [15]:

```
from sklearn.metrics import r2_score

test_x = np.asanyarray(test[['ENGINE_SIZE']])
test_y = np.asanyarray(test[['CO2EMISSIONS']])
test_y_hat = regr.predict(test_x)

print("Mean absolute error: %.2f" % np.mean(np.absolute(test_y_hat - test_y)))
print("Residual sum of squares (MSE): %.2f" % np.mean((test_y_hat - test_y) ** 2))
print("R2-score: %.2f" % r2_score(test_y_hat , test_y) )
```

Mean absolute error: 25.72

Residual sum of squares (MSE): 1109.65

R2-score: 0.65

Want to learn more?

IBM SPSS Modeler is a comprehensive analytics platform that has many machine learning algorithms. It has been designed to bring predictive intelligence to decisions made by individuals, by groups, by systems – by your enterprise as a whole. A free trial is available through this course, available here: [SPSS Modeler \(http://cocl.us/ML0101EN-SPSSModeler\)](http://cocl.us/ML0101EN-SPSSModeler)

Also, you can use Watson Studio to run these notebooks faster with bigger datasets. Watson Studio is IBM's leading cloud solution for data scientists, built by data scientists. With Jupyter notebooks, RStudio, Apache Spark and popular libraries pre-packaged in the cloud, Watson Studio enables data scientists to collaborate on their projects without having to install anything. Join the fast-growing community of Watson Studio users today with a free account at [Watson Studio \(https://cocl.us/ML0101EN_DSX\)](https://cocl.us/ML0101EN_DSX)

Thanks for completing this lesson!

Author: [Saeed Aghabozorgi \(https://ca.linkedin.com/in/saeedaghabozorgi\)](https://ca.linkedin.com/in/saeedaghabozorgi)

[Saeed Aghabozorgi \(https://ca.linkedin.com/in/saeedaghabozorgi\)](https://ca.linkedin.com/in/saeedaghabozorgi), PhD is a Data Scientist in IBM with a track record of developing enterprise level applications that substantially increases clients' ability to turn data into actionable knowledge. He is a researcher in data mining field and expert in developing advanced analytic methods like machine learning and statistical modelling on large datasets.

Copyright © 2018 [Cognitive Class \(https://cocl.us/DX0108EN_CC\)](https://cocl.us/DX0108EN_CC). This notebook and its source code are released under the terms of the [MIT License \(https://bigdatauniversity.com/mit-license/\)](https://bigdatauniversity.com/mit-license/).