

Unknown Outcomes and Authority-Aware Replay: Tool-Boundary Semantics for Durable LLM Agents

Nguyễn Mạnh Hùng^{1*} Phạm Thị Minh Hồng¹
Nguyễn Thị Mỹ Linh¹ Phạm Thị Thu Thảo¹
Nguyễn Tiến Long¹

¹Vietnam Maritime University — Faculty of Information Technology
hungkhp888@gmail.com

September 18, 2026

Abstract

Long-running LLM agents that mutate external state remain vulnerable at tool boundaries: session or graph checkpoints restore conversation, but do not prove which side effects already committed. After crash and restore, models may re-synthesize tool arguments, causing duplicate payments, notifications, or writes—Action Replay and Authority Resurrection (ACRFence). We propose a local-first harness semantics that separates transport from effect, keeps a ternary effect journal with an explicit unknown state and reconciliation, and consumes artifact-bound authority at confirmation. We formalize invariants I1–I5, map them onto neko-core, and evaluate baselines B0–B3 on mock mutating tools under a locked crash-injection protocol with fixed weights and mandatory model-harness reporting. In a scripted pilot ($N=10$) and confirmatory LLM-in-the-loop runs (glm-5.3 via z.ai, $N=30$ on $F01/F02/F03 \times M\text{-pay} \times \{B2, B3\}$ plus $F01 \times M\text{-fs} \times \{B2, B3\}$ and $F01 \times M\text{-mail} \times \{B2, B3\}$; 300 cells, 76584 tokens, 0 failures), the primary safety headlines remain $B3 \succ B2$ on $F01$ duplicates under re-synthesis (0.0 vs 1.0) and on $F03$ Authority Resurrection (0.0 vs 1.0). $F01 \times M\text{-fs}$ and $F01 \times M\text{-mail}$ replicate RQ1 using `writes_len` and `emails_sent`, respectively; $F02$ exposes a safety/completeness tradeoff rather than a universal $B3$ completeness win. A pinned neko-seal adapter ($N=30$, @c863cc6) reproduces $F01$ RQ1 under the sealed restore path without closing scaffold≠production. Caveats: primary LLM empirics still run on an eval-harness scaffold (journal/I5 lab-side); mock tools, a single model (glm-5.3), and scripted faults. This Phase-1 preprint stakes claims for feedback; it is not yet Q2 journal submit-ready. We do not replace Temporal-style workflow engines or treat MCP support as novelty.

Keywords: LLM agents; agent harness; durable execution; crash recovery; tool-boundary semantics; unknown outcome; authority consumption; Action Replay; Authority Resurrection; local-first systems

1 Introduction

LLM agents that call mutating tools fail under crash and restore for a reason that is easy to miss in chat-centric designs: a session or graph checkpoint can restore

*Corresponding author.

what was said without proving *which external effects already happened*. After restore, the model may re-synthesize tool arguments. Servers then treat the new request as fresh work, producing duplicate side effects—payments, notifications, filesystem writes, deploy flags—even when the operator believed the run had only “resumed.” ACRFence names the core threats as Action Replay and Authority Resurrection: re-issuing a mutation without a receipt, and reviving spent approval for a re-synthesized request [Zheng et al. \[2026\]](#). Classic idempotency keys help only when the *same* key is reused; they do not bind when the harness emits a new identifier for a semantically related call [Xu et al. \[2026\]](#).

Practice and surveys already treat reliability as a *harness* problem. Guidance on long-running agent harnesses stresses cross-session progress and clean hand-off across context windows [Anthropic \[2025\]](#). Harness surveys place Lifecycle and Governance beside Execution, and argue that bottlenecks may sit in the harness as much as in the foundation model [Li et al. \[2026a\]](#), [Guo et al. \[2026\]](#). Durable-execution engines go further: Temporal’s Agent Harness offers an outer durable history and a policy seam before tools [Davis \[2026\]](#), and systems notes insist that checkpointing conversation state is not durable execution of effects [Zylos Research \[2026\]](#). What remains under-specified for **local-first** agent development environments is a small, measurable semantics at the *tool boundary*: a ternary effect journal that can enter unknown, refuse blind replay until reconcile, and **consume** artifact-bound authority on confirm—without claiming to replace workflow fleets.

Claim. Under intentional crash/restore at tool boundaries, and with model weights fixed, a harness that (1) separates transport from effect, (2) keeps an unknown control state with reconciliation, and (3) consumes authority at effect confirmation reduces duplicate external effects relative to checkpoint-only and checkpoint+idempotency-key baselines on a local-first stack (neko-core / wiii), addressing Action Replay and Authority Resurrection. A scripted pilot ($N=10$) supports this: under $F01 \times M\text{-pay}$ with argument re-synthesis, B3 achieves `duplicate_effect_rate` 0.0 vs B2’s 1.0 (E-20260918-17); under F03, B3 uniquely blocks Authority Resurrection that B1/B2 exhibit (E-20260918-16). Confirmatory LLM cells (glm-5.3, $N=30$, B2 vs B3) reproduce the same headlines: F01 duplicate rates 1.0 vs 0.0 (E-20260918-22) and F03 mean authority resurrection 1.0 vs 0.0 (E-20260918-23). The $F01 \times M\text{-fs}$ and $F01 \times M\text{-mail}$ replications give the same RQ1 separation on `writes_len` and `emails_sent`, respectively (E-20260918-27/33), while F02 records the safety/completeness trade-off (E-20260918-28).

Contributions.

1. **Formal tool-boundary effect model (I1-I5):** pre-effect durability; unknown $\neq$ success; no blind replay from unknown; authority intersection narrow-only; authority consumption bound to artifact hash—distinguishing chat memory, effect journal, and procedural workflows [Wang et al. \[2025\]](#).
2. **Open realization on neko-core:** lift existing pre-effect checkpoints and unknown seals into an explicit effect journal and B3 baseline, with ADE/wiii as deployment context rather than a second novelty claim.
3. **Crash-injection evaluation protocol:** compare B0-B3 under a fault catalog aligned to ACRFence classes; report model-harness pairs in the spirit of harness-aware eval [Yao et al. \[2026\]](#), [Li et al. \[2026b\]](#), [Kapoor et al. \[2025\]](#); primary metric = duplicate external effects per injected fault.

Non-goals (scope). We do not replace Temporal or Restate; MCP support is wire, not novelty; we do not claim Phase-1 SWE-bench SOTA (mock mutating tools first). Fine-grained permission trees [Sharma and Grossman \[2026\]](#) are related governance context, not our primary claim. Venue ambition is a Q2 systems/SE journal track (JSS as primary target); we do not print an unverified Scopus/JCR quartile on a CV from this draft alone. An arXiv Phase-1 upload remains an optional intermediate for claim staking, not the finish line.

Paper map. Section 2 backgrounds harness durability and the threat model. Section 3 presents the effect state machine and invariants I1-I5. Section 4 maps the model onto neko-core. Section 5 details baselines B0-B3, faults, and metrics. Section 6 reports scripted pilot results (incl. re-synthesis) and confirmatory LLM aggregates ($N=30$). Section 7 discusses limits, Q2-bar gaps, and local-first positioning. Section 8 relates prior work; Section 9 concludes.

2 Background and Threat Model

2.1 Harness durability vs. chat checkpoints

Production writing already treats reliability as a harness concern [Anthropic \[2025\]](#). Survey work frames the same layer systematically: Lifecycle and Governance sit beside Execution [Li et al. \[2026a\]](#), and a model-harness lens argues that bottlenecks may sit in harness design as much as in foundation models [Guo et al. \[2026\]](#). Industry systems synthesis sharpens the distinction between checkpointing and durable execution: session memory is not an effect journal [Zylos Research \[2026\]](#). Temporal’s Agent Harness positions an *outer* harness with durable workflow history and a policy seam before tool execution [Davis \[2026\]](#). We cite these as baselines and as **non-replacements**: Angle A studies lighter journal semantics for local-first agent stacks, not a substitute for Temporal-style workflow fleets.

2.2 Threat classes (ACRFence)

We align our fault catalog to ACRFence’s named threats [Zheng et al. \[2026\]](#):

- **T-AR (Action Replay):** re-issuing a mutating call after restore without proving prior outcome.
- **T-ARes (Authority Resurrection):** reviving spent approval for a re-synthesized request.
- **T-FS (False Success):** harness reports success when the external effect did not commit (or disagrees with ground truth).
- **T-LA (Lost Ack):** effect may have committed but durable receipt is missing—often the precursor to Action Replay.

Classic idempotency keys help only when the same key is reused; they fail when the model re-synthesizes arguments and the harness mints a fresh key [Xu et al. \[2026\]](#).

2.3 Threat model (ACRFence-style)

We follow ACRFence’s early threat-model placement [Zheng et al. \[2026\]](#): name what we protect, who can force restore, which invariants we enforce, and what is

out of scope—before stating the effect machine.

Assets / what we protect.

- **Effect-journal integrity:** after crash/restore, the harness must not treat a missing durable receipt as license for blind irreversible re-execution (transport $\neq$ effect).
- **Spent authority stays spent:** artifact-bound authority tokens κ consumed at confirmation must not become re-usable after rewind (Authority Resurrection).
- **No blind irreversible re-execution:** when outcome is unknown, the harness must reconcile against mock ground truth before confirming or re-issuing a mutating call.

Adversary models (aligned to ACRFence).

1. **Crash-Induced Restore:** a crash after an irreversible mock effect (or after approval, before execute) causes the framework to restore a prior checkpoint; the agent (or scripted driver with `--resynthesize`) re-issues tool arguments that may differ from the pre-crash call—servers then treat the call as fresh work.
2. **Deliberate Rollback Abuse:** an operator with rewind/restore access intentionally restores to a post-approval or pre-receipt checkpoint to re-issue mutations or revive a spent κ . In scope as operator/rewind misuse of the harness control plane; **not** a malicious host OS, compromised kernel, or off-path network adversary.

Invariants we enforce (tie to I2/I3/I5). We target the same safety spirit as ACRFence’s two restore invariants, expressed in our effect model:

- **I2/I3 — no blind replay from unknown:** unknown $\neq$ success; no second irreversible effect until reconcile inspects counters/hashes.
- **I5 — consumed artifact-bound authority stays consumed:** after confirm, κ bound to $\text{hash}(t, a_{\text{canonical}}, \text{artifact})$ cannot authorize a re-synthesized or restored call without fresh approval.

Assumptions. (i) Mutating tools in reported runs are **mock-instrumented** so counters and artifact hashes are ground truth; (ii) model weights (or the scripted driver) are **fixed** across baseline ablations so differences attribute to harness policy; (iii) crash injection is confined to the mock/registry boundary under the locked fault catalog; (iv) no real payments, SMTP, or production deploys.

Out of scope (non-goals). Malicious host / TEE restart; model-weight or prompt-injection attacks as primary threat; real payment/SMTP/deploy endpoints; replacing Temporal-class workflow fleets; treating MCP wire support as novelty; Phase-1 SWE-bench SOTA claims.

3 Effect Model

LLM agents re-synthesize tool arguments after restore. Session/graph checkpoints therefore do **not** imply exactly-once external effects. We formalize a small effect state machine suitable for RQ1/RQ2 evaluation.

3.1 Objects

Symbol	Meaning
M	Fixed foundation model (weights/config pinned)
H	Harness (neko-core runtime + host gates)
t	Tool name / MCP tool id
a	Tool arguments (possibly re-synthesized)
e	Effect record id (stable across restore)
r	Durable receipt / observation
κ	Authority token bound to artifact hash
σ	Session checkpoint (messages, mode, profile, ...)
J	Effect journal (confirmed / rejected / unknown)

Vocabulary distinction. Conversation/session memory $\subset \sigma$ (what was said); effect journal J (which mutations are confirmed/rejected/unknown); procedural workflows (AWM-style) are reusable how-to text, **not** control-flow durability [Wang et al. \[2025\]](#).

3.2 Effect state machine

Each irreversible (or potentially irreversible) tool admission creates an effect e with states:

- **proposed** — model requested $t(a)$; κ not yet consumed.
- **executing** — pre-effect checkpoint written; side effect may be in flight.
- **confirmed** — durable receipt r proves completion; κ **consumed**.
- **rejected** — denied by gate/policy or failed closed before external commit.
- **unknown** — pre-effect durable intent exists, no durable receipt.
- **reconciling** — subphase of unknown: inspect world state before any new mutation.

Transitions of interest: crash/abort/timeout from **executing** enter **unknown**; reconcile may move **unknown**→**confirmed** (world shows done) or **unknown**→**rejected** (absent + safe). Fork to a new proposed effect requires fresh κ' bound to possibly new args—never resurrecting spent κ . Figure 1 summarizes the machine.


3.3 Invariants (I1-I5)

I1 — Pre-effect durability.

Before invoking a mutating tool body, H persists enough of σ that a crash yields a recoverable in-flight record.

I2 — Unknown $\neq$ success.

An interrupted mutation is never labeled success; sealed content instructs inspect-before-retry.

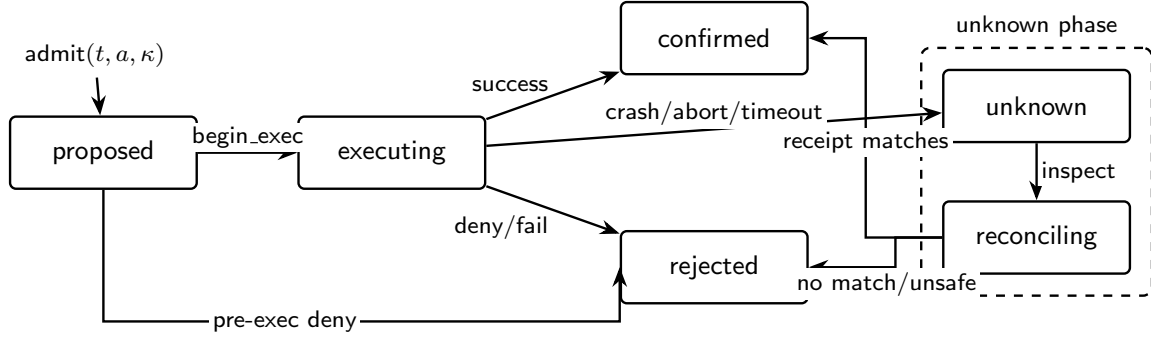

Effect journal states (Angle A). *reconciling* $\subset$ *unknown*; no blind replay.

Figure 1: Effect journal state machine: *proposed* $\rightarrow$ *executing* then *confirmed*, *rejected*, or *unknown*; *reconciling* is a subphase of *unknown* (inspect before any new mutation).

I3 — No blind replay from unknown.

Transition *unknown* $\rightarrow$ *executing* with a **new** effect id e' is forbidden until reconcile completes.

I4 — Authority intersection (narrow-only).

Effective permission = $\cap\{\text{tool class, mode, turn lease, launch authority}\}$. Intersection may narrow, never expand host policy.

I5 — Authority consumption (RQ2).

κ is bound to $\text{hash}(t, a_{\text{canonical}}, \text{artifact})$; confirmation consumes κ . Restore must not revive a consumed κ for a re-synthesized a' (Authority Resurrection).

Optional **I6** (provider semantic commit: transport retry may be safe before visible output; after committed semantic event, continue from checkpoint rather than blind HTTP replay) is implementation context, not the paper’s primary claim.

3.4 Threat alignment

Attack class	Machine reading	Mitigated by
Action Replay	<i>unknown/executing</i> $\rightarrow$ new side effect without reconcile	I2, I3, B3 reconcile
Authority Resurrection	consumed κ reused for a'	I5
Semantic re-synthesis	$a' \neq a$ treated as retry	I3 fork + new κ' ; B2 alone insufficient

4 System Realization

We realize the model on the local-first *neko-core* stack, with ADE/*wiii* as deployment context rather than a second treatment.

Formal piece	Already in neko-core	Contribution for paper
Pre-effect checkpoint	Yes (durableCheckpoint before tool)	Measure under crash injection
Unknown seal	Yes (dangling tool_call; unknown_outcome)	Lift to first-class journal state e
Non-auto-replay Authority $\cap$	Yes (docs + stop policy) Yes (modes, leases, profiles)	Enforce in eval harness B3 Add consume-on-confirm + artifact hash
Effect journal J Reconcile probes	Partial (trajectory embeds results) Advised in text	Explicit receipt store for mocks Automated reconciler for mock tools

Audit notes (2026-09-18): neko-core already checkpoints before managed tool execution and can seal interrupted mutations; MCP failures may return “outcome unknown; not retried.” Gaps relative to a full machine include: no first-class effect id spanning proposed→confirmed across tools; unknown_outcome is often convention rather than one shared enum; reconciling is policy text more than an enforced phase; and 15 single-consume tokens bound to artifact hash are the clearest net-new mechanism measured in the B3 scaffold.

5 Methods

5.1 Overview

We evaluate whether a tool-boundary harness with ternary effect state and single-consume authority reduces **duplicate external effects** under intentional crash/restore, relative to checkpoint baselines, with **model weights fixed**. Threats follow ACR-Fence [Zheng et al. \[2026\]](#). All mutating side effects run through **mock tools** only. Every reported cell identifies a **model-harness pair** [Yao et al. \[2026\]](#).

5.2 Baselines

ID	Tag	Recovery policy
B0	none	No durable session; crash $\Rightarrow$ cold start
B1	session_ckpt	Persist trajectory; resume may re-drive in-flight tools
B2	ckpt_idem	B1 + client idempotency key on every mock mutating call
B3	unknown_auth	B1 + seal-unknown + reconcile + authority consume (RQ2)

B3 realizes the formal machine: transport $\neq$ effect; interrupted mutations seal as unknown; reconcile inspects mock ground truth before any new mutate; spent authority cannot authorize a re-synthesized request.

5.3 Mock tools

Mock ID	Tool	Observable side effect
M-pay	mock_payment_charge	charge_count, charges[]
M-mail	mock_email_notify	emails_sent
M-fs	mock_fs_write	writes[], file bytes, content hash
M-flag	mock_deploy_flag	flag_set_count, flag value

Mocks expose deterministic seeds, counter read APIs, optional `idempotency_key`, optional `authority_token` (B3), and crash hooks. Ground truth is mock counters / artifact hashes, not model self-report.

5.4 Fault catalog (F01-F10)

Injection points sit at mock / ToolRegistry boundaries.

ID	Injection (summary)	Threat	B3 expectation
F01	Kill after mock success, before durable receipt	T-LA→T-AR	Seal unknown; reconcile; no second effect
F02	Kill mid-mutation	T-LA / T-FS	unknown→reconciling; inspect
F03	Restore after approval, before execute	T-ARes	Authority bound to artifact+effect; else re-approve
F04	After confirm, model re-synthesizes same intent	T-AR	Consumed authority + ledger reject
F05	Duplicate resume with spent authority	T-ARes	Single-consume deny
F06	Transport retry after semantic commit	T-AR	Transport retry $\neq$ effect retry
F07	Crash during reconcile of unknown	T-AR / T-FS	Sticky unknown until inspect completes
F08	Idempotency key present; harness still replays	T-AR / T-FS	No second execute when reconciled confirmed
F09	FS write commits; session checkpoint lags	T-LA→T-AR	Reconcile by content hash
F10	Payment double-charge under B1 (headline RQ1)	T-AR	Reconcile <code>charge_count</code> ; no second charge


5.5 Experimental design

A **cell** = (baseline $\times$ fault_id $\times$ mock_id) with fixed (model_id, harness_id). Full catalog: $4 \times 10 \times 4 = 160$ cells. Pilot subset (engineering-time): M-pay + M-fs $\times$ {F01, F02, F03, F06, F09, F10} $\times$ B0-B3 = 48 cells. Meaningless fault $\times$ mock pairs are recorded NA with reason—never filled with invented outcomes.

Sample size. Pilot $N=10$ per cell (scripted driver). Confirmatory $N=30$ per cell on F01/F02/F03 $\times$ M-pay and F01 $\times$ {M-fs,M-mail}, each with {B2, B3}, uses an LLM driver (glm-5.3, reasoning_effort=low, resynthesize=true); Wilson score 95% CIs are reported in Section 6.5; bootstrap remains optional.

Single-run procedure. (1) Start harness in baseline mode; register mocks on the sole effect path. (2) Fixed user task requiring one logical mutating effect. (3) Arm injector for fault_id. (4) On crash, write marker; restore per baseline. (5) Recover to terminal state or timeout; record latency. (6) Read counters/hashes; write meta.json. (7) Reset mock state. For B3: missing durable result $\Rightarrow$ seal unknown $\Rightarrow$ inspect $\Rightarrow$ reconciling $\rightarrow$ confirmed|rejected; consume authority only on confirm.

Fault → threat mapping (F01–F03)

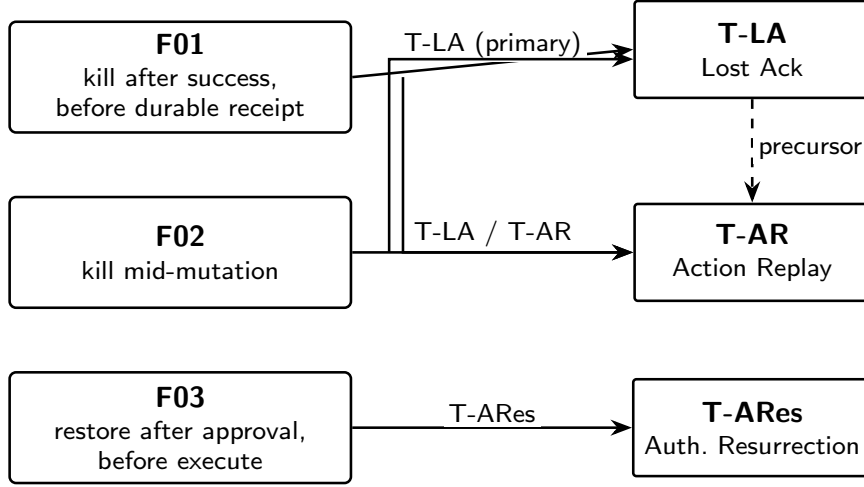

Black/white journal figure. Catalog F01–F03 mapped to ACRFence threats T-LA, T-AR, T-ARes (paper fault-catalog table).

Figure 2: Mapping of primary eval faults F01–F03 to ACRFence threat classes T-LA (Lost Ack), T-AR (Action Replay), and T-ARes (Authority Resurrection). F01 is T-LA→T-AR; F02 engages T-LA/T-AR under mid-mutation; F03 is T-ARes.

5.6 Metrics

Metric	Definition	Role
duplicate_effect_rate	Fraction of runs with mock counter increment >1	Primary (RQ1)
false_success_rate	Harness confirms success but mock disagrees	Safety
recovery_latency_ms	Restore start → stable terminal state	Cost
re_approval_rate	Fraction needing new gate approval after restore	RQ2 / UX
authority_resurrection_count	Attempts to execute with a spent token	RQ2

5.7 Model-harness reporting

Every run and aggregate row reports `model_id`, `harness_id`, `baseline`, `fault_id`, `mock_id`, `run_id`, and `evidence_id` (harness id is e.g. `neko-core` at a git SHA, or a scaffold id). Pilot cells use `scripted/always-issue-tool` (optionally with `--resynthesize`). Confirmatory cells use driver `llm`, model `glm-5.3` (`model_id llm/glm-5.3@z.ai`), `reasoning_effort=low`, harness `eval-harness@scaffold`, and LLM Action Replay (`resynthesize=true`). We do not pool across different harness ids without an explicit harness factor Yao et al. [2026]. Artifact layout: `evidence/runs/E-id/` with `meta.json`, crash markers, and pre/post counters.

5.8 Exclusions and integrity

Mocks only; no real money, SMTP, or production deploy. No Temporal/workflow-engine replacement claim; MCP is not the contribution. **No invented run numbers.** Pilot evidence for F01-F03 ($N=10$, scripted) and confirmatory LLM evidence for F01/F02/F03×M-pay plus F01×M-fs and F01×M-mail ($N=30$, glm-5.3) are reported in Section 6.

6 Evaluation and Results

Setup reminder. Pilot cells use fixed scripted policy (scripted/always-issue-tool at scaffold), seeds 1-10, faults from the locked catalog, and baselines B0-B3. Confirmatory cells use an LLM driver (glm-5.3) on F01/F02/F03×M-pay, F01×M-fs, and F01×M-mail, each with $\{B2, B3\}$ ($N=30$, seeds 1-30). Harness: eval-harness (scaffold). Ground truth is mock counters. Date: 2026-09-18 ICT. Evidence aggregates (filenames under evidence/runs/):

- pilot-F01-Mpay-N10-summary.json (E-20260918-16)
- pilot-F01-Mfs-N10-summary.json (E-20260918-16)
- pilot-F02-Mpay-N10-summary.json (E-20260918-16)
- pilot-F03-Mpay-N10-summary.json (E-20260918-16)
- pilot-F01-Mpay-resynth-N10-summary.json (E-20260918-17)
- confirmatory-llm-F01-Mpay-N30-summary.json (E-20260918-22)
- confirmatory-llm-F01-Mfs-N30-summary.json (E-20260918-27)
- confirmatory-llm-F01-Mmail-N30-summary.json (E-20260918-33)
- confirmatory-llm-F02-Mpay-N30-summary.json (E-20260918-28)
- confirmatory-llm-F03-Mpay-N30-summary.json (E-20260918-23)
- confirmatory-neko-seal-F01-Mpay-N30-summary.json (E-20260918-31)

6.1 F01 — Kill after success, before durable receipt

M-pay (mock_payment_charge).

Baseline	dup_rate	mean charge_count	seal_unknown
B0	1.0	2.0	0.0
B1	1.0	2.0	0.0
B2	0.0	1.0	0.0
B3	0.0	1.0	1.0

M-fs (mock_fs_write). Same pattern: B0/B1 duplicate rate 1.0 (mean writes 2.0); B2/B3 0.0 (mean writes 1.0); B3 seal_unknown_rate 1.0.

Reading. Under F01 with a *stable* scripted retry, classic idempotency (B2) already suppresses duplicate counters. B3 matches B2 on duplicates while **always emitting** an unknown seal before reconcile—visible instrumentation of I2/I3 that B2 lacks.

6.2 F02 — Kill mid-mutation (M-pay)

Baseline	dup_rate	mean charge_count	seal_unknown
B0	0.0	1.0	0.0
B1	0.0	1.0	0.0
B2	0.0	1.0	0.0
B3	0.0	0.0	1.0

Reading. No baseline produced a *counted* duplicate under this scaffold’s mid-body kill+retry model ($N=10$). B3 uniquely keeps `seal_unknown` and ends with **zero** confirmed charges after reconcile when the mock left no committed receipt—conservative I2 (unknown $\neq$ success). B0–B2 still report `mean charge_count` 1.0 (retry completed a charge without an unknown seal). This is a behavioral distinction, not a duplicate-rate win.

6.3 F03 — Restore after approval, before execute (RQ2)

M-pay.

Baseline	dup_rate	mean auth. resurrection	mean charge_count
B0	0.0	0.0	1.0
B1	0.0	1.0	1.0
B2	0.0	1.0	1.0
B3	0.0	0.0	0.0

Reading. This is the clearest $B3 \succ B2$ signal in the pilot: session checkpoint and idempotency keys do **not** stop Authority Resurrection after restore-before-execute (mean resurrection count 1.0 on B1/B2). B3 refuses to consume a mismatched/spent path, records resurrection 0.0, and performs **no** charge without fresh authority (`charge_count` 0.0)—aligning with I5 and RQ2 (E-20260918-16).

6.4 F01 under semantic re-synthesis (B2 vs B3)

Driver. `--resynthesize` mutates idempotency-relevant args on retry (e.g. payment amount + attempt) and mints a new idempotency key—an ACRFence-style Action Replay case when the model does not reuse keys. Model id: `scripted/always-issue-too` $N=10$, seeds 1–10 (E-20260918-17).

Baseline	dup_rate	mean charge_count	seal_unknown
B2 (ckpt + idem. key)	1.0	2.0	0.0
B3 (unknown + reconcile + auth.)	0.0	1.0	1.0

Reading. When retry arguments change, B2’s idempotency keys no longer collide—duplicate charges return (rate 1.0). B3 still seals unknown and reconciles against the already-committed mock effect, so counters stay at 1.0. This is the primary **RQ1** separation of B3 from B2 under the threat model that motivates the paper (E-20260918-17).

6.5 Confirmatory LLM (glm-5.3, $N=30$)

Driver. `--driver llm --model glm-5.3 --reasoning-effort low` (implies `--resynthesize`)
the live model proposes post-crash tool arguments and a fresh idempotency key
(Action Replay path). Model id: `llm/glm-5.3@z.ai`; harness: `eval-harness@scaffold`.
Matrix: `F01/F02/F03×M-pay×{B2,B3}`, `F01×M-fs×{B2,B3}`, and `F01×M-mail×{B2,B3}`,
each with seeds 1–30 (300 cells, 0 failures). Per-mock LLM usage: M-pay has
44913 total tokens (F01: 15283; F02: 14683; F03: 14947), M-fs has 16355 total tokens
(F01: 16355), and M-mail has 15316 total tokens (F01: 15316); overall 76584 total to-
kens. Binary rates below report exact k/n with Wilson score 95% confidence inter-
vals ($z=1.96$); see also `outline/stats-ci-table.md`.

F01×M-pay (E-20260918-22).

Baseline	k/n	dup_rate	Wilson 95% CI	mean charge_count	seal_unknown
B2	30/30	1.000	[0.886, 1.000]	2.0	0/30
B3	0/30	0.000	[0.000, 0.114]	1.0	30/30

Wilson score intervals on exact cell counts (binomial). B2 ends `confirmed×30` with two charges; B3 seals unknown, reconciles, and ends `confirmed_via_reconcile×30` with one charge—matching the scripted re-synthesis pilot at larger N (F01 LLM grand total 15283 tokens; B2 7585, B3 7698).

F01×M-fs (E-20260918-27).

Baseline	k/n	dup_rate	Wilson 95% CI	mean writes_len	seal_unknown
B2	30/30	1.000	[0.886, 1.000]	2.0	0/30
B3	0/30	0.000	[0.000, 0.114]	1.0	30/30

On the filesystem mock, the same $B3 \succ B2$ separation appears under Action Replay when the effect metric is `writes_len`: duplicate rate 0.000 vs 1.000 (Wilson CIs as above) and mean writes length 1.0 vs 2.0 (LLM tokens B2 8184, B3 8171). The M-fs charge count remains zero, so it is not the effect metric here.

F01×M-mail (E-20260918-33).

Baseline	k/n	dup_rate	Wilson 95% CI	mean emails_sent	seal_unknown
B2	30/30	1.000	[0.886, 1.000]	2.0	0/30
B3	0/30	0.000	[0.000, 0.114]	1.0	30/30

On the mail mock, the effect metric is `emails_sent`, not `charge_count` (charge count is 0 for both baselines). B2 duplicates all 30 cells, while B3 seals and reconciles all 30; errors are 0 in both baselines. The separation matches M-pay and M-fs (LLM tokens B2 7697, B3 7619; grand total 15316).

F02×M-pay (E-20260918-28).

Baseline	dup k/n (Wilson CI)	mean charge_count	seal k/n	outcome
B2	0/30 [0.000, 0.114]	1.0	0/30	<code>confirmed×30</code>
B3	0/30 [0.000, 0.114]	0.0	30/30	<code>rejected_via_reconcile×30</code>

F02 shows the safety/completeness tradeoff (LLM tokens B2 7321, B3 7362). B3 conservatively seals unknown and refuses blind replay, so reconciliation ends in rejected_via_reconcile×30 and may drop the effect; B2 retries and completes one charge per cell. Thus B3 is safer against Action Replay but is not a universal completeness win. Duplicate rates are both 0/30; the separation is seal + charge count.

F03×M-pay (E-20260918-23).

Baseline	<i>k/n</i>	auth. res. rate	Wilson 95% CI	mean charge_count	outcome
B2	30/30	1.000	[0.886, 1.000]	1.0	confirmed×30
B3	0/30	0.000	[0.000, 0.114]	0.0	re_approval_required×30

Authority-resurrection rate is the fraction of cells with authority_resurrection_count > 0 (equals mean count here). B3 blocks Authority Resurrection under LLM resume (0.000 vs 1.000) with zero post charges (F03 LLM grand total 14947 tokens; B2 7477, B3 7470). Both baselines report seal_unknown 0/30 on F03.

Reading. Live glm-5.3 Action Replay reproduces the pilot RQ1/RQ2 separations on the B2/B3 headline cells. The F01×M-fs and F01×M-mail results give the same B3 ≻ B2 reading via writes_len and emails_sent, respectively; F02 instead exposes the safety/completeness tradeoff described above. Scope is intentionally narrow: single model, scaffold harness, mock tools, and F01/F02/F03×M-pay plus F01×{M-fs,M-mail}×{B2,B3} only—not F04–F10 or B0/B1.

6.6 Confirmatory neko-core seal path (F01×M-pay, *N*=30)

Driver and pin. This subsection is **separate** from the glm-5.3 scaffold tables above (do not mix harness_id rows). Driver: scripted/neko-seal-fixture@adapter (CLI confirmatory-neko-seal.ts)—*not* glm-5.3. Harness id: neko-core@c863cc6+eval-adapter@14cd188, with neko-core pinned at short c863cc6 (full c863cc6a386f8eea048089a7276d619353de94b6). Restore seals dangling tool calls via real Agent.sealDanglingToolCalls; EffectJournal/I5 and mocks remain lab-side (dual-stack). Evidence: E-20260918-31; confirmatory-neko-seal-F01-Mpay-N30-summary.js

F01×M-pay (E-20260918-31).

Baseline	<i>k/n</i>	dup_rate	Wilson 95% CI	mean charge_count	seal_unknown
B2	30/30	1.000	[0.886, 1.000]	2.0	30/30
B3	0/30	0.000	[0.000, 0.114]	1.0	30/30

B2 ends with outcome blind_replay_invoked×30 (errors 0); B3 ends with confirmed_via_reconcile×30 (errors 0). Both report seal_text_matches_neko_core_rate 1.0. Dup/charge matches the scaffold LLM F01 pattern (matches_scaffold_dup_charge_pattern=true; E-20260918-22).

Reading (honesty). B2 seal_unknown 1.0 here because restore *always* runs real Agent.sealDanglingToolCalls—this **differs** from scaffold B2 seal 0 (E-20260918-22) and is *not* a contradiction of the RQ1 dup/charge pattern. Remaining fidelity

gaps: dual-stack (EffectJournal/I5 + mocks still lab-side); no full ACP session/load; no `Provider.complete/runLoop`; crash = in-process `CrashSignal`; no `ToolRegistry` production-mocks claim. This partially addresses Q2 P0-1 (scaffold $\neq$ production) but does *not* close it fully (Section 7.2).

6.7 Cross-fault summary

Fault	Where B0/B1 fail	Where B2 helps	Where B3 uniquely helps
F01	duplicate counters	yes (same key)	seal+reconcile (parity on
F01+resynth	—	no	no duplicate (0 vs 1)
F02	(no dup in scaffold)	retry completes one charge	unknown seal; conserv
F03	—	no (resurrection)	blocks resurrection

False-success rate was 0.0 across all reported pilot cells.

6.8 Threats to validity (results)

1. Pilot uses a **scripted agent** with harness `--resynthesize`; confirmatory uses a **single** live model (`glm-5.3 / z.ai, reasoning_effort=low`).
2. **Scaffold vs. production (partial)**: LLM empirics use `eval-harness@scaffold`; Section 6.6 pins the seal path at `neko-core@c863cc6` via real `sealDanglingToolCalls`, but `EffectJournal/I5`, mocks, and crash remain lab-side—so B3 rates still do not prove full production-path fidelity (P0-1 partial).
3. **Mock-only**: all mutating tools are mocks (M-pay, M-fs, and M-mail in the confirmatory matrix); no real providers.
4. Confirmatory $N=30$ covers $F01/F02/F03 \times M\text{-pay}$ and $F01 \times \{M\text{-fs}, M\text{-mail}\}$, $\{B2, B3\}$ only—not B0/B1, not F04–F10, and not multi-model.
5. Confirmatory binary rates now report exact k/n with Wilson score 95% intervals (Section 6.5); bootstrap remains optional.
6. F02 duplicate metric saturated at 0 for all baselines under current crash modeling—needs richer mid-body partial-commit mocks before claiming F02 duplicate wins.

6.9 Takeaway for RQ1/RQ2

- **RQ1 (duplicates)**: B3 vs B0/B1 on stable-key F01 (0 vs 1); **B3 vs B2 under re-synthesis F01 (0 vs 1)** in the scripted pilot (E-20260918-17) and confirmatory LLM cells (E-20260918-22), with the $F01 \times M\text{-fs}$ and $F01 \times M\text{-mail}$ replications showing the same separation via `writes_len` and `emails_sent` (E-20260918-27/33); the `neko-seal` adapter (E-20260918-31) reproduces the same F01 dup/charge pattern under pinned `sealDanglingToolCalls@c863cc6`.
- **RQ2 (authority)**: F03—B3 eliminates Authority Resurrection that B1/B2 exhibit ($1.0 \rightarrow 0.0$) in the pilot (E-20260918-16) and under `glm-5.3` ($N=30$, E-20260918-23).
- **F02 tradeoff**: B3 conservatively rejects after reconcile, while B2 completes one charge (E-20260918-28).

Next empirics: expand F04–F10; multi-model drivers; richer mid-body mocks for F02—without inventing unrun cells.

7 Discussion and Limitations

7.1 Limits of the present draft

This paper’s contribution is **semantic, methodological, and empirical at pilot + confirmatory scale**. Invariants I1–I5, the B0–B3 contrast, and a locked crash/restore protocol on mock tools are fixed. A scripted pilot ($N=10$) and confirmatory LLM cells (glm-5.3, $N=30$ on F01/F02/F03 $\times$ M-pay and F01 $\times$ {M-fs, M-mail} $\times$ {B2, B3}) support RQ1 under re-synthesis (B3 $\succ$ B2 on duplicates across the three F01 mocks M-pay, M-fs, and M-mail, using `charge_count`, `writes_len`, and `emails_sent`, respectively) and RQ2 on F03 (B3 blocks Authority Resurrection). F02 is a safety/completeness tradeoff, not a claim of universal B3 completeness. Honest limits remain: **single model, B2/B3 only** on confirmatory cells, **F01–F03 plus F01 M-fs and M-mail replications**, and **mock tools**. Claiming broader quantitative superiority for B3 beyond these cells would overreach.

The implementation mapping is incomplete by design. `neko-core` already provides pre-effect durability and unknown seals; single-consume, artifact-hash-bound authority (I5 / RQ2) remains a **research extension** measured in the B3 scaffold. Mock tools bound external risk but also ecological validity: real providers add partial commits, eventual consistency, and policy surfaces our mocks only approximate.

7.2 Q2 journal bar (honest gap list)

The locked finish line is **Q2 systems/SE journal quality** (JSS as P0 target), not Phase-1 arXiv alone. An arXiv upload remains an *optional intermediate* for claim staking and feedback; it does not close submit readiness. Relative to a JSS-style bar, the present draft still has the following P0 gaps (why each matters in short):

- P0-1 Scaffold $\neq$ production path (partial).** Seal path pinned @ c863cc6 (real `sealDanglingToolCalls`; E-20260918-31, Section 6.6); journal/I5 still lab. Dual-stack remains: message seal = `neko-core`; EffectJournal/I5 + mocks = lab; no full ACP session/load; crash = in-process `CrashSignal`. P0-1 is *not* closed. Reviewers may still ask whether B3 is the full production restore path.
- P0-2 External validity still thin.** Confirmatory LLM covers M-pay+M-fs+M-mail under a single model (glm-5.3) and the `eval-harness@scaffold` harness. The M-mail axis has landed and improves external validity, but a second model or a `neko-core-faithful` confirmatory path is still needed; P0-2 is not fully closed.
- P0-3 Public artifact + consent/GVHD.** No tagged public release with pinned commits in-paper yet; co-author consent and institutional endorsement remain pending.

Closed this pass (former P0-3/P0-4): Wilson CIs on confirmatory k/n (Section 6.5); Figures 1–2.

P1 depth vs. Restate/LangGraph checkpointers and P2 Elsevier camera-ready (`elsarticle`) are deferred; this pack intentionally holds the arXiv/workshop article class until technical P0s close. We do *not* claim the draft is Q2-submit-ready.

7.3 Local-first harness vs Temporal-class engines

Durable workflow engines remain the right outer substrate when operators already run fleets, timers, and cross-service activities [Davis \[2026\]](#). Systems commentary that checkpointed chat is not durable execution of effects aligns with our vocabulary split [Zylos Research \[2026\]](#). Angle A’s non-goal is explicit: we study lighter journal semantics for **local-first** agent development environments (neko-core / wiii), not a replacement for Temporal or Restate. Claiming “exactly-once” in the distributed-systems sense would overreach; we claim a narrower property—fewer duplicate *mock-observable* mutations under a published fault catalog when restore may re-issue tool work [Zheng et al. \[2026\]](#).

7.4 Procedural memory is not control durability

Procedural workflow memory improves how agents reuse multi-step how-to knowledge across episodes [Wang et al. \[2025\]](#). A stored procedure does not certify whether a charge already posted. We keep conversation state, effect journals, and procedural workflows as distinct objects.

7.5 Threats to validity

Internal. Crash injectors must fire at stated boundaries; mis-timed kills confound baseline contrasts. B2 depends on mock key semantics—if keys are recorded only after commit, F02 mid-body kills still permit duplicates, which is informative rather than a harness bug. Authority metrics require that “spent” be durable across resume. The pilot stresses re-synthesis via an explicit harness flag; confirmatory cells use live glm-5.3 Action Replay on the F01/F03 headline contrasts, with F02 and M-fs included as scoped replications. P0-1 is **partial**: seal path pinned @ c863cc6 (E-20260918-31); journal/I5 still lab—scaffold-vs-full-production remains an internal threat to the systems claim.

External. Fixed-driver cells attribute differences to harness policy, not weight updates, but transfer to *other* models and to non-mock tools is unproven. Confirmatory $N=30$ covers $F01/F02/F03 \times M\text{-pay}$ and $F01 \times \{M\text{-fs}, M\text{-mail}\} \times \{B2, B3\}$ under one model (glm-5.3) on eval-harness@scaffold; the M-mail axis improves external validity, but single-model/scaffold coverage means magnitudes may differ elsewhere and P0-2 remains open.

Construct / statistical. duplicate_effect_rate on counters is our primary RQ1 construct; it does not capture all user-visible harm. False-success and resurrection counts guard safety constructs tied to ACRFence threats [Zheng et al. \[2026\]](#). Confirmatory rates include Wilson 95% intervals on exact k/n (P0-3 closed this pass). Harness-aware reporting of model-harness pairs reduces scaffold confounding in presentation [Yao et al. \[2026\]](#), but does not by itself validate the full fault suite (F04–F10 still thin). Mock-only ethics bound ecological validity by design.

Honest next steps (Q2 path). Close remaining P0 gaps before journal submit: remaining P0-1 fidelity (ACP session/load, journal/I5 merge beyond dual-stack seal); a second model or a neko-core-faithful confirmatory path (the M-mail mock axis has landed); public artifact with pinned commits plus co-author consent/GVHD.

CI-on-cells and contribution figures (Figures 1, 2) are in this draft. Multi-model drivers, richer mid-body mocks for F02, and F04–F10 remain welcome but must not invent unrun cells. An arXiv Phase-1 upload is optional intermediate only. Scope stays master’s-sized: local-first effect semantics, mock crash injection, and clear non-goals relative to workflow engines and MCP novelty.

8 Related Work

Long-horizon LLM agents increasingly fail not only because models err, but because *harnesses* lose track of which external mutations already happened. Session and graph checkpoints preserve conversation or control state, yet they do not certify tool-boundary exactly-once semantics when the model *re-synthesizes* arguments after restore.

Long-running harness practice. Anthropic’s guidance emphasizes cross-session progress and clean handoff [Anthropic \[2025\]](#). Li et al. organize harness engineering with an ETCLOVG-style taxonomy [Li et al. \[2026a\]](#). Guo et al. complement that view with a model-harness lens and six runtime responsibilities [Guo et al. \[2026\]](#). We adopt their vocabulary for *where* durability and authority live, then specialize to crash/restore *effect* semantics that those surveys do not formalize.

MiniMax’s open-source Code CLI (MIT; npm @minimax-ai/code v0.4.12; CLI mcode) is a production-facing terminal coding-agent harness with an inspectable allow/deny/ask permission gate before tool execution, MCP, and session-history resume [MiniMax-AI \[2026a\]](#). Vendor materials also report FrontierHarness Eval results, which we treat as unreproduced vendor claims. The permission gate is a useful foil for I4/I5 *admission* discussion, but Code CLI does not implement unknown_outcome sealing, effect journaling, or crash-restore Action Replay—so it remains complementary related practice, not a substitute for Angle A’s ternary tool-boundary semantics. MiniMax’s older Mini-Agent demo harness likewise provides an execution loop with notes/MCP/summarization and a binary ToolResult [MiniMax-AI \[2026b\]](#), and should not be confused with today’s Code CLI announcement.

Durable execution and the outer harness. Zylos argues that session memory is not an effect journal [Zylos Research \[2026\]](#). Temporal’s Agent Harness positions an outer harness with durable workflow history [Davis \[2026\]](#). We cite both as baselines and as **non-replacements**: Angle A studies lighter journal semantics for local-first ADE / coding-agent stacks, not a substitute for Temporal-style fleets.

Threats and authority. ACRFence names Action Replay and Authority Resurrection [Zheng et al. \[2026\]](#). Beyond Single-Use Tokens argues that identifier-local tokens are insufficient and develops durable authorization state [Xu et al. \[2026\]](#). We use that line for authority-consume design (bind approval to an artifact hash; consume on confirm). AC4A contributes fine-grained permissions [Sharma and Grossman \[2026\]](#); we cite it as governance related work, not as our primary claim.

Procedural memory is not control durability. Agent Workflow Memory stores reusable procedural workflows [Wang et al. \[2025\]](#). Procedural text does not answer whether a payment or filesystem write already committed; Angle A treats AWM-style memory as orthogonal related work.

Evaluation methodology. Harness-Bench stresses measuring harness effects across models and reporting model-harness pairs Yao et al. [2026]. AgencyBench highlights scaffold effects in long-context settings Li et al. [2026b]. HAL argues for holistic agent evaluation infrastructure Kapoor et al. [2025]. We adopt their spirit—always report pinned model ID and harness configuration—while keeping a *narrow* crash-injection protocol and duplicate-external-effect metric.

Contribution relative to this map. Angle A contributes published tool-boundary effect semantics with invariants I1–I5 that surveys and blogs leave open, plus measured duplicate-effect and authority-resurrection reduction under intentional kill points on a local-first neko-core / wiii stack (scripted pilot + confirmatory glm-5.3 cells), with Temporal-class engines as non-goal baselines.

9 Conclusion

Tool-calling agents fail under crash and restore when checkpoints remember dialogue but not which mutations already landed. Re-synthesized tool calls then replay effects or resurrect spent approval—the Action Replay and Authority Resurrection threats named by ACRFence Zheng et al. [2026]. This paper argues for a local-first remedy at the tool boundary: separate transport from effect, keep a ternary journal with an explicit unknown state and reconcile-before-replay, and consume artifact-bound authority at confirmation (invariants I1–I5), realized as baseline B3 on neko-core / wiii with model weights held fixed.

We contributed (i) the formal effect machine and authority rules, (ii) a mapping onto an open local harness, and (iii) a locked crash-injection protocol against B0–B2 on mock mutating tools, with mandatory model-harness reporting. A **scripted pilot** ($N=10$) and **confirmatory LLM cells** (glm-5.3, $N=30$ on F01/F02/F03 $\times$ M-pay and F01 $\times$ {M-fs,M-mail} $\times$ {B2,B3}; E-20260918-22/27/33/28/23) both support RQ1 under re-synthesis ($B3 \succ B2$, across three F01 mocks, including the M-fs `writes_len` and M-mail `emails_sent` replications, and RQ2 on F03. F02 shows the safety/completeness tradeoff: conservative reconciliation can reject an effect that B2 completes. Limits remain honest: scaffold LLM empirics plus a **partial** neko-seal path (E-20260918-31; journal/I5 still lab), single model, mock tools, and headline cells only—though confirmatory rates now carry Wilson CIs and the draft includes Figures 1–2. We explicitly do not replace Temporal-class durable engines Davis [2026], treat MCP as novelty, or claim SWE-bench SOTA. An arXiv Phase-1 upload is an *optional intermediate* for claim staking. The finish line is **Q2 (JSS P0)**: closing the *remaining* P0 gaps—full production-path fidelity beyond dual-stack seal, a second model or neko-core-faithful confirmatory path, and public artifact plus co-author consent/GVHD—*before* journal submit. CI reporting and contribution figures are addressed in this draft; we do not claim the full P0 set is closed.

AI Use Statement

GLM-5.3 via z.ai (<https://api.z.ai/api/coding/paas/v4>, `reasoning_effort=low`) was used **for agent re-synthesis in the evaluation harness only** (confirmatory LLM cells; `--driver llm / bun run confirmatory-llm`); it is not a co-author. Paper prose was authored with AI assistance (including Cursor/Grok Bot agents for

drafting, literature organization, L^AT_EX editing, and polishing), as previously disclosed. All research claims, experiment design, reported aggregates, and final wording decisions remain the authors’ responsibility; no invented results were accepted from tools.

Acknowledgments

The author thanks collaborators and lab reviewers for feedback on the formal model and evaluation protocol. Placeholder—expand before camera-ready.

References

- Anthropic. Effective harnesses for long-running agents. Engineering blog, 11 2025. URL <https://www.anthropic.com/engineering/effective-harnesses-for-long-running-agents>. Tier 0; Not Q. Cross-session harness practice (initializer + progress/git handoff).
- Cornelia Davis. Temporal agent harness: An early look at durable agent infrastructure. Temporal blog, 8 2026. URL <https://temporal.io/blog/temporal-agent-harness-durable-agent-infrastructure>. Tier 0; Not Q. Outer vs inner harness; durable history + policy seam; non-goal baseline (we do not replace Temporal).
- Jianyuan Guo, Zhiwei Hao, Chengcheng Wang, Cheng Fan, Tingzhang Luo, Hongguang Li, Ying Gao, Hefei Mei, Jiankun Peng, Rongjian Xu, Minjing Dong, Han Wu, Mengyu Zheng, Kai Han, Shiqi Wang, Chang Xu, and Yunhe Wang. From question answering to task completion: A survey on agent system and harness design. 2026. URL <https://arxiv.org/abs/2606.20683>. Tier 1; Not Q (preprint). Model-harness lens; six runtime responsibilities.
- Sayash Kapoor, Benedikt Stroebel, Peter Kirgis, Nitya Nadgir, Zachary S Siegel, Boyi Wei, Tianci Xue, Ziru Chen, Felix Chen, Saiteja Utpala, Franck Ndzomga, Dheeraj Oruganty, Sophie Luskin, Kangheng Liu, Botao Yu, Amit Arora, Dongyoon Hahm, Harsh Trivedi, Huan Sun, Juyong Lee, Tengjun Jin, Yifan Mai, Yifei Zhou, Yuxuan Zhu, Rishi Bommasani, Daniel Kang, Dawn Song, Peter Henderson, Yu Su, Percy Liang, and Arvind Narayanan. Holistic agent leaderboard: The missing infrastructure for ai agent evaluation. 2025. URL <https://arxiv.org/abs/2510.11977>. Tier 2; Not Q (preprint). Holistic agent eval; report model+scaffold; log inspection.
- Junjie Li, Xi Xiao, Yunbei Zhang, Chen Liu, Lin Zhao, Xiaoying Liao, Yingrui Ji, Janet Wang, Yingqiang Ge, Weijie Xu, Xi Fang, Xiang Xu, Tianchen Zhao, Youngeun Kim, Jihun Hamm, Tianyang Wang, and Chandan Reddy. Agent harness engineering: A survey, 2026a. URL <https://openreview.net/pdf?id=e0Nq7FdHa>. Tier 1; venue status: survey / OpenReview PDF + companion <https://picrew.github.io/LLM-Harness/> (ETCLOVG taxonomy); Not confirmed Q journal. Authors from companion citation block 2026-09-18.
- Keyu Li, Junhao Shi, Yang Xiao, Mohan Jiang, Jie Sun, Yunze Wu, Dayuan Fu, Shijie Xia, Xiaojie Cai, Tianze Xu, Weiye Si, Wenjie Li, Dequan Wang, and Pengfei Liu. AgencyBench: Benchmarking the frontiers of autonomous agents in 1m-token real-world contexts. 2026b. URL <https://arxiv.org/abs/2601.11044>. Tier 2;

Not Q (preprint; abs comment: Accepted by ACL 2026 Main). Scaffold / native-ecosystem effects.

MiniMax-AI. Minimax code cli. GitHub repository, 2026a. URL <https://github.com/MiniMax-AI/minimax-code>. Tier 1 optional; Not Q. OSS terminal coding agent (MIT; HEAD 17b8ded, 2026-09-18; npm @minimax-ai/code v0.4.12; CLI mcode). Inspectable allow/deny/ask permission gate (allowOnce/allowAlways); MCP; session history resume. Vendor claims SOTA on FrontierHarness Eval—not reproduced here. No unknown_outcome, effect journal, or crash-restore Action Replay. Distinct from MiniMax-AI/Mini-Agent. Audited 2026-09-18.

MiniMax-AI. Mini-agent: Minimal single-agent demo harness. GitHub repository, 2026b. URL <https://github.com/MiniMax-AI/Mini-Agent>. Tier 1 optional; Not Q. Official MiniMax OSS demo harness (MIT; HEAD d76a4f6, 2026-02-14). Session notes + context summarization + MCP; binary ToolResult. Complementary to Angle A; no unknown_outcome, authority consume, or effect journal. Distinguish from unofficial npm/PyPI minimax-harness. Audited 2026-09-18.

Reshabh K Sharma and Dan Grossman. AC4A: Access control for agents. 2026. URL <https://arxiv.org/abs/2603.20933>. Tier 2; Not Q (preprint). Fine-grained resource permissions for API/browser agents.

Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. In Aarti Singh, Maryam Fazel, Daniel Hsu, Simon Lacoste-Julien, Felix Berkenkamp, Tegan Maharaj, Kiri Wagstaff, and Jerry Zhu, editors, *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 63897–63911. PMLR, 2025. URL <https://proceedings.mlr.press/v267/wang25bx.html>. Tier 1; top-tier conference (not Scopus journal Q). Clarifies procedural workflows $\neq$ our control journal. Also arXiv:2409.07429.

Jinghan Xu, Longze Fan, Zeyuan Wang, Xinjin Li, and Hankai Liu. Beyond single-use tokens: Durable authorization state for replay-resistant llm agent actions. 2026. URL <https://arxiv.org/abs/2608.01710>. Tier 2; Not Q (preprint). Authority consumption / CapLease; semantic replay beyond identifier-local tokens.

Yilun Yao, Xinyu Tan, Chao-Hsuan Liu, Yaoming Li, Zhengyang Wang, Wenhan Yu, Zhewen Tan, Yuxuan Tian, Guangxiang Zhao, Lin Sun, Xiangzheng Zhang, and Tong Yang. Harness-bench: Measuring harness effects across models in realistic agent workflows. 2026. URL <https://arxiv.org/abs/2605.27922>. Tier 2; Not Q (preprint). Report model-harness pairs; execution-alignment failures.

Yusheng Zheng, Yiwei Yang, Wei Zhang, and Andi Quinn. Acrfence: Preventing semantic rollback attacks in agent checkpoint-restore. 2026. URL <https://arxiv.org/abs/2603.20625>. Tier 0 threat model; venue status: arXiv preprint (journal_ref CoDAIM workshop 2026 on abs); Not Q. Names Action Replay / Authority Resurrection.

Zylos Research. Durable execution for ai agent runtimes: Checkpointing, replay, and recovery. Industry research note, 4 2026. URL <https://zylos.ai/research/2026-04-24-durable-execution-agent-runtimes/>. Tier 0; Not Q. Checkpoint $\neq$ durable execution; execution journal / idempotent tool boundaries.

A Reproducibility

Environment

Box date: 2026-09-18 ICT. Runtime: Bun 1.4.x. Agent drivers: scripted/always-issue-tool (pilot), and llm/glm-5.3@z.ai with reasoning_effort=low (confirmatory; implies --resynthesize). Harness: eval-harness under the wiii-lab tree.

Commands

```
cd eval-harness
bun run dry
bun run src/cli/run-cell.ts \
  -b B3 -f F01 -m M-pay --seed 1 --write-evidence
bun run src/cli/run-cell.ts \
  -b B2 -f F01 -m M-pay --seed 1 \
  --resynthesize --write-evidence
bun run src/cli/run-cell.ts \
  -b B3 -f F01 -m M-pay --seed 1 \
  --resynthesize --write-evidence
# LLM confirmatory matrix (requires ZAI_API_KEY):
bun run confirmatory-llm --fault F01 --n 30
bun run confirmatory-llm --fault F02 --n 30
bun run confirmatory-llm --fault F03 --n 30
# or: bun run confirmatory-llm --fault both --n 30
```

Aggregates

- evidence/runs/pilot-F01-Mpay-N10-summary.json
- evidence/runs/pilot-F01-Mfs-N10-summary.json
- evidence/runs/pilot-F02-Mpay-N10-summary.json
- evidence/runs/pilot-F03-Mpay-N10-summary.json
- evidence/runs/pilot-F01-Mpay-resynth-N10-summary.json
- evidence/runs/confirmatory-llm-F01-Mpay-N30-summary.json (E-20260918-22)
- evidence/runs/confirmatory-llm-F01-Mfs-N30-summary.json (E-20260918-27)
- evidence/runs/confirmatory-llm-F01-Mmail-N30-summary.json (E-20260918-33)
- evidence/runs/confirmatory-llm-F02-Mpay-N30-summary.json (E-20260918-28)
- evidence/runs/confirmatory-llm-F03-Mpay-N30-summary.json (E-20260918-23)

B Ethics (Mock-Only)

All mutating side effects in this work use **mock tools only**. There are no real payments, no real email/SMTP delivery, and no production deploys. Crash injection is

confined to the mock registry boundary under a locked fault catalog. Human subjects were not involved. Operators should not enable these crash hooks against live credentials or production endpoints.

C Artifact Availability

- Evaluation harness source: `/workspace/research/wiii-lab/eval-harness` (lab path; public release TBD).
- Evidence runs and summary JSON under `evidence/runs/` (append-only log).
- Lab context / related code: <https://github.com/meiie> (neko-core / wiii) — public artifact link TBD at camera-ready.
- This preprint pack: `arxiv-pack/latex/` (TeX source + `refs.bib`).