

SIGMA: Semantic-Difference Instruction-Grounding Mask Annotator for Text-Driven Image Manipulation Localization

Peiyu Zhuang¹, Jianquan Yang¹, Haodong Li², Zhuoying Cai¹, Ruitao Xie³, Jishen Zeng⁴,
Baoying Chen⁴, Jiwu Huang⁵, Xiaochun Cao^{1*}

¹Shenzhen Campus of Sun Yat-sen University, China

²Guangdong Provincial Key Laboratory of Intelligent Information Processing and
Shenzhen Key Laboratory of Media Security, Shenzhen University, Shenzhen, China

³Shenzhen University of Advanced Technology and
Shenzhen Institute of Advanced Technology, Chinese Academy of Sciences, China

⁴Alibaba Group, China ⁵Shenzhen MSU-BIT University, China

{zhuangpy, yangjq65, caoxiaochu}@mail.sysu.edu.cn;
lihaodong@szu.edu.cn; caizhy55@mail2.sysu.edu.cn
xieruitao@suat-sz.edu.cn; jishen.zjs@alibaba-inc.com;
1900271059@email.szu.edu.cn; jwhuang@smbu.edu.cn

Abstract

Text-driven image editing has advanced rapidly, but reliably localizing these manipulations requires image manipulation localization (IML) models trained on large pixel-annotated datasets, and there is still no low-cost way to obtain such training data at scale. We observe that these data already exist in disguise: public editing datasets contain millions of structurally identical (*original*, *edited*) pairs to IML training samples, lacking only pixel-level masks. Recovering these masks automatically is non-trivial: pixel differencing is overwhelmed by diffusion-induced perturbations across all pixels, and instruction-only grounding localizes only what the prompt describes, missing unintended editor side-effects. We propose **SIGMA** (Semantic-difference Instruction-Grounding Mask Annotator), which performs semantic-feature differencing in a vision foundation backbone and injects an instruction-derived spatial prior into this visual stream via bidirectional cross-modal refinement, amplifying the difference signal at intended-edit regions when the editor faithfully realizes user intent. SIGMA is trained in two complementary stages: Stage I supervises on inpainting masks; Stage II closes the diffusion-domain shift via VAE-roundtrip noise calibration, EMA self-training, and an edit-noise disentanglement loss. SIGMA outperforms existing automatic mask generators on five benchmarks (+12.20% F1, +11.16% IoU). When applied to public editing corpora, it produces a ~ 1.1 M IML training set that improves six diverse detectors by +18.34% F1 across five datasets, turning previously unused editing data into a model-agnostic supervisory resource for IML. We'll release the full codebase as soon as the paper is accepted.

1 Introduction

Recent advances in text-driven image editing [1, 2, 3, 4, 5, 6] have lowered the barrier to producing semantically coherent forgeries that fuel misinformation and erode public trust. Mitigating this risk demands robust image manipulation localization (IML) models, which in turn require large-scale,

*Corresponding author.

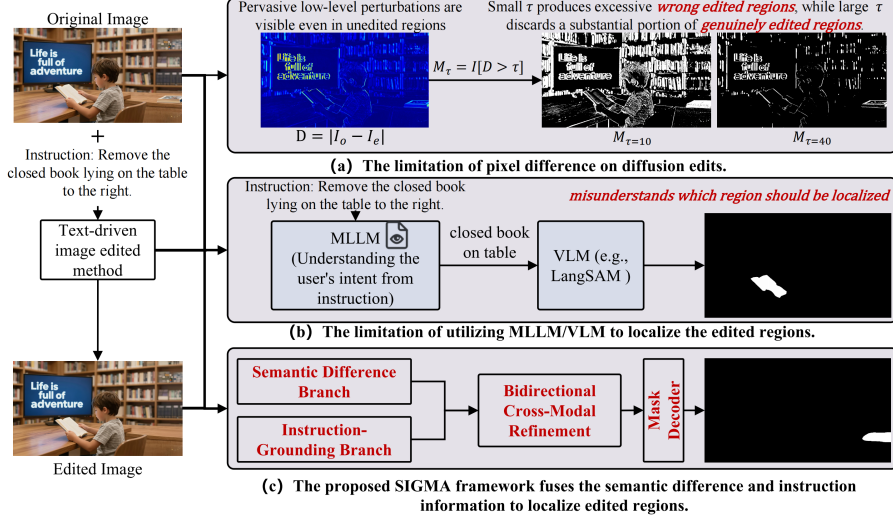


Figure 1: (a) Failure modes of pixel-level differencing under diffusion-based text-driven editing. (b) Failure modes of MLLM/VLM-based mask inference from instructions. (c) Overview of the SIGMA framework.

pixel-accurately annotated training data, a resource the IML community currently lacks. Nowadays, public editing corpora have reached the million-sample scale (*e.g.*, ByteMorph[7] 6.0M, AnyEdit[8] 2.5M), while the largest IML resources with pixel-level masks (SIDA[9] 300K, GRE[10] 228.7K) are dwarfed by even a single editing corpus (see Fig. 5 in Appendix A for additional information). We note that existing editing datasets already comprise (*original, edited*) pairs that are structurally equivalent to the training samples used in IML; however, they lack the corresponding pixel-level annotation masks. This raises a natural question: *can existing editing pairs be automatically turned into pixel-accurate IML supervision, enabling million-scale corpora without rerunning editors or manual annotation?*

Answering this question hinges on an automatic, scalable annotator. Two seemingly natural strategies prove ineffective. **Pixel-level differencing with thresholding** works for inpainting-style edits but breaks down under diffusion-based editing, where every pixel is perturbed by VAE encoding/decoding and iterative denoising. As shown in Fig. 1(a), low thresholds drown the mask in reconstruction noise, while high thresholds discard subtle yet semantically meaningful edits. **Instruction-grounding via MLLMs/VLMs** (Fig. 1(b)) localizes only what the prompt requests and cannot verify whether the editor faithfully realized that intent or introduced unintended side-effects. Hybrid pipelines (*e.g.*, SAM with human refinement) yield accurate masks but trade scalability for accuracy. The two automatic strategies are not coincidentally inadequate: they are *complementary, not alternative*. Pixel differencing observes what changed but cannot separate noise from edits, while instruction grounding encodes what was intended but cannot verify execution.

Building on this view, we propose **SIGMA** (Semantic-difference Instruction-Grounding Mask Annotator), a two-branch framework whose semantic branch performs multi-scale differencing on dense features from a frozen DINOv2 [11] encoder (*where content actually differs*), while its instruction branch grounds a parsed transformation tuple (original concept, edited concept, action) onto each image via a vision-language grounder (*where the change was intended*); a bidirectional cross-modal refinement module then injects the instruction prior into the visual stream to amplify true edit signals while continuously re-anchoring the prior to the most supported regions. To bridge supervision scarcity and diffusion-domain shift, SIGMA is trained in two stages: **Stage I** pre-trains on inpainting pairs with exact masks, and **Stage II** adapts to unlabeled editing pairs via VAE-roundtrip zero-edit calibration, exponential moving average (EMA) self-training, and an edit-noise feature disentanglement loss, jointly suppressing diffusion-induced false positives without any target-domain annotation.

Our contributions can be summarized as follows.

- We reframe scalable IML annotation as **semantic change localization**, showing that pixel differencing and instruction grounding are complementary but individually insufficient for diffusion-based edits.
- We propose **SIGMA**, a two-branch framework fusing semantic-feature differencing with parsed-instruction grounding via bidirectional cross-modal refinement, trained by a two-stage strategy that targets supervision scarcity and domain shift respectively.
- Using SIGMA, we construct a **million-scale IML dataset** from public editing corpora at no re-generation or manual annotation cost, achieving **+12.20%** F1 over prior automatic mask generators and boosting six diverse IML detectors by **+18.34%** F1 in cross-dataset generalization.

2 Related Work

IML and its data bottleneck. IML has progressed from hand-crafted forensic cues to learning-based methods exploiting noise inconsistencies, frequency artifacts, or diffusion priors [12, 13, 14, 15, 16, 9], with recent work integrating multimodal large language models for explainable, pixel-level localization [17, 18, 19]. Yet their performance is bottlenecked by training data: early benchmarks [20, 21, 22, 23] rely on hand-crafted operations whose artifacts no longer reflect modern forgeries, while diffusion-era datasets [13, 24, 25, 26, 27] remain dwarfed by public text-driven editing corpora in scale and edit diversity (Fig. 5 in Appendix A). Our contribution is orthogonal to architectural advances: rather than proposing yet another localization model, we provide a scalable, fully automated annotator that turns previously unused text-driven editing data into supervision for arbitrary downstream IML models.

Change detection. SIGMA’s semantic differencing branch shares architectural intuition with change detection (CD) in remote sensing, where co-registered multi-temporal images are compared via Siamese CNNs, Transformers [28], or foundation models such as SAM [29] and pretrained DDPMs [30]. Despite this shared backbone, the two tasks differ at two levels. First, CD nuisances are low-level and semantically independent of content, so Siamese differencing can suppress them; in text-driven editing, the entire image is re-synthesized through a VAE and iterative denoising, yielding high-level, content-correlated perturbations at every pixel that feature normalization alone cannot remove. Second, mainstream CD operates on the image pair alone. In our setting, however, the editing instruction provides a strong spatial prior that, when the editor faithfully realizes user intent, amplifies the visual difference signal at the targeted regions.

3 Proposed Method

3.1 Problem Formulation

Given a source image $I^o \in \mathbb{R}^{H \times W \times 3}$, its text-driven edited counterpart I^e , and the editing instruction T , we predict a binary mask $M \in \{0, 1\}^{H \times W}$ delineating the semantically edited region. A pixel (x, y) is considered edited iff its underlying semantic properties (object identity, material, color, or contextual role) have meaningfully changed:

$$M(x, y) = \mathbf{1}[\mathcal{S}(I^o)_{(x,y)} \neq \mathcal{S}(I^e)_{(x,y)}], \quad (1)$$

where $\mathcal{S}(\cdot)$ denotes a high-level semantic representation, so that VAE roundtrip noise and stochastic denoising are excluded. This definition imposes two requirements that neither pixel differencing nor instruction grounding alone satisfies (shown in Sec. 1). SIGMA addresses (i) by lifting comparison from pixels to a frozen DINOv2 [11] feature space, and (ii) by parsing the instruction into a structured spatial prior and injecting it into the visual differencing branch via bidirectional cross-modal refinement.

3.2 The Proposed SIGMA Framework

As illustrated in Fig. 2, SIGMA is powered by four key components: a semantic difference branch, an instruction-grounding branch, a bidirectional cross-modal refinement module, and a mask decoder.

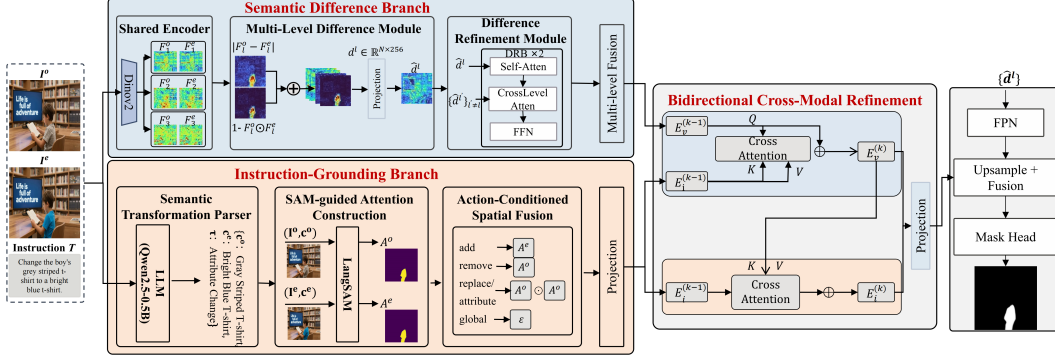


Figure 2: Overview of the SIGMA architecture.

3.2.1 Semantic-Difference Branch

Shared Encoder. We adopt frozen DINOv2-Base as the shared backbone for both images. Both images are resized to 518×518 , and patch token features are extracted at three designated layers $\mathcal{L} = \{l_1, l_2, l_3\}$ corresponding to layers 2, 5, and 11 of the ViT-Base architecture:

$$\mathbf{f}_o^l = \text{DINOv2}(I^o), \quad \mathbf{f}_e^l = \text{DINOv2}(I^e), \quad l \in \mathcal{L}, \quad (2)$$

where $\mathbf{f}_o^l, \mathbf{f}_e^l \in \mathbb{R}^{N \times D}$, $N = 37 \times 37 = 1,369$, and $D = 768$. Shallow layers encode fine-grained texture and local structure, whereas deeper layers capture object-level semantics and holistic scene understanding.

Multi-Level Differencing Module. For each level $l \in \mathcal{L}$, we construct a difference representation that encodes both magnitude and directional dissimilarity of feature change. Let $\tilde{\mathbf{f}}_o^l$ and $\tilde{\mathbf{f}}_e^l$ denote the L2-normalized features. We compute

$$\mathbf{d}_{\text{abs}}^l = |\tilde{\mathbf{f}}_o^l - \tilde{\mathbf{f}}_e^l|, \quad \mathbf{d}_{\text{cos}}^l = \tilde{\mathbf{f}}_o^l \odot \tilde{\mathbf{f}}_e^l, \quad (3)$$

We then fuse these signals with the original features and project into a shared embedding:

$$\mathbf{d}^l = \text{Proj}^l([\mathbf{d}_{\text{abs}}^l \parallel \mathbf{d}_{\text{cos}}^l \parallel \tilde{\mathbf{f}}_o^l \parallel \tilde{\mathbf{f}}_e^l]), \quad \text{Proj}^l: \mathbb{R}^{4D} \rightarrow \mathbb{R}^C, \quad C = 256. \quad (4)$$

Difference Refinement Module. Raw difference features are corrupted by patch-level quantization artifacts. We refine them with transformer-based Difference Refinement Blocks (DRBs):

$$\hat{\mathbf{d}}^l = \text{DRB}^l(\mathbf{d}^l, \{\mathbf{d}^{l'}\}_{l' \neq l}). \quad (5)$$

Each DRB consists of a within-level self-attention layer, a cross-level attention layer (queries at l attend to keys and values from all $l' \neq l$), and a feed-forward network with GELU activation. Cross-level attention disambiguates patches whose editing evidence is strong at one semantic scale but weak at another. The refined multi-level difference features are aggregated into a dense per-patch visual evidence representation:

$$\mathbf{E}_v^{(0)} = \text{Agg}(\{\hat{\mathbf{d}}^l\}_{l \in \mathcal{L}}) \in \mathbb{R}^{N \times C'}, \quad C' = 256, \quad (6)$$

where $\text{Agg}(\cdot)$ denotes channel-wise concatenation followed by a 1×1 convolutional projection. This branch answers: *where does the semantic content of the image pair differ?*

3.2.2 Instruction-Grounding Branch

The instruction-grounding branch supplies a structurally independent stream of evidence distilled from the editing instruction itself. The majority of instructions specify a well-defined semantic transformation, characterized by an original concept c^o , an edited concept c^e , and an operation type op (representative examples are provided in Appendix B). We exploit the informative content contained in the instruction by employing a sequence of three consecutive submodules.

Semantic Transformation Parser (STP). STP extracts the tuple (c^o, c^e, op) from T , with $op \in \{\text{add}, \text{remove}, \text{replace}, \text{attribute change}, \text{global}\}$. We use Qwen2.5-0.5B [31] with in-context prompting (full prompt is presented in Appendix C), chosen for its strong instruction-following at minimal parameter cost.

SAM-guided Attention Construction. Each non-empty concept is associated with its corresponding image, c^o with I^o and c^e with I^e , and provided to LangSAM (GroundingDINO[32] + SAM2.1[33]) as a textual input prompt in order to derive a concept-conditioned attention map:

$$\phi(I, c) = \begin{cases} \epsilon_{\text{global}} \mathbf{1}, & c = \emptyset \text{ or } \mathcal{L}(I, c) = \emptyset, \\ \mathcal{R}(\max \mathcal{L}(I, c)), & \text{otherwise,} \end{cases} \quad (7)$$

where $\mathcal{L}(I, c)$ is the LangSAM prediction, $\max \mathcal{L}$ denotes instance-wise max merging, $\mathcal{R}$ is bilinear resizing to the working resolution. We set the global smoothing parameter to $\epsilon_{\text{global}} = 0.001$ in order to maintain numerical stability in the generation process and to avoid obtaining a completely empty output. We obtain the two downstream concept maps as $A^o = \phi(I^o, c^o)$ and $A^e = \phi(I^e, c^e)$.

Action-Conditioned Spatial Fusion (ACSF). Different actions imply structurally different spatial relationships between A^o and A^e , which we encode by an action-conditioned rule:

$$M_{\text{intent}}(p) = \begin{cases} A^e(p) & op = \text{add}, \\ A^o(p) & op = \text{remove}, \\ A^o(p) \cdot A^e(p) & op \in \{\text{replace}, \text{attribute change}\}, \\ \epsilon_{\text{global}} \mathbf{1} & op = \text{global}. \end{cases} \quad (8)$$

The product rule for *replace* and *attribute change* reflects the joint requirement that patch p shows the original concept in I^o and the edited concept in I^e ; for the *global* case, the near-zero uniform map provides only weak instruction evidence, naturally letting the semantic branch dominate. Representative visualizations of the instruction-grounding branch are provided in the Appendix D. The intent map is then passed through a 1×1 convolution with ReLU to yield the initial instruction evidence $\mathbf{E}_t^{(0)} = \text{Conv}(M_{\text{intent}}) \in \mathbb{R}^{N \times C'}$.

3.2.3 Bidirectional Cross-Modal Refinement

The two branches play distinct but coupled roles: the semantic-difference branch acts as the engine, generating dense cues that drive mask prediction, while the instruction-grounding branch acts as the navigator, providing a spatial prior that predicts where edits should occur. To fuse them, the Bidirectional Cross-Modal Refinement (BCMR) module stacks cross-attention blocks with an asymmetric order: at each layer, the semantic-difference branch first attends to the current prior to amplify edit-relevant signals, then the instruction branch attends to this freshly updated state to re-center the prior on regions with strongest visual support. This ordering enforces the intended asymmetry: the semantic-difference branch carries the primary signal, while the instruction prior continuously self-refines to sharpen where the model should act.

Formally, let $\mathbf{E}_v^{(0)}$ and $\mathbf{E}_i^{(0)}$ be the initial visual and instruction representations. At each iteration $k = 1, \dots, K$, we perform two sequential cross-attention updates:

$$\mathbf{E}_v^{(k)} = \mathbf{E}_v^{(k-1)} + \text{CrossAttn}(\mathbf{E}_v^{(k-1)}, \mathbf{E}_i^{(k-1)}), \quad \mathbf{E}_i^{(k)} = \mathbf{E}_i^{(k-1)} + \text{CrossAttn}(\mathbf{E}_i^{(k-1)}, \mathbf{E}_v^{(k)}). \quad (9)$$

The instruction update queries the freshly updated $\mathbf{E}_v^{(k)}$ rather than the stale $\mathbf{E}_v^{(k-1)}$, so the prior is always re-anchored against the most current visual evidence.

Consensus representation. After K iterations, the two refined representations are fused into a shared consensus space:

$$\mathbf{Z} = \text{Proj}([\mathbf{E}_v^{(K)} \parallel \mathbf{E}_i^{(K)}]) \in \mathbb{R}^{N \times C'}, \quad (10)$$

where $\text{Proj}: \mathbb{R}^{2C'} \rightarrow \mathbb{R}^{C'}$ is a 1×1 convolution. $\mathbf{Z}$ encodes the image patches at which the two evidence sources intersect, corresponding exactly to the regions that underwent semantic modification.

3.2.4 Mask Decoder

The mask decoder aggregates DRB outputs $\{\hat{\mathbf{d}}^\ell\}_{\ell \in \mathcal{L}}$ with a top-down FPN and then predicts dense mask logits. Although these tensors come from different ViT depths, they are all defined on the same patch lattice (H_p, W_p) ; the decoder therefore builds a spatial pyramid internally by adaptive pooling of $\hat{\mathbf{d}}^3$ and $\hat{\mathbf{d}}^2$ to approximately $(H_p/4, W_p/4)$ and $(H_p/2, W_p/2)$ while keeping $\hat{\mathbf{d}}^1$ at (H_p, W_p) ,

followed by a 1×1 projections, top-down fusion, and 3×3 convolutional layer. The highest-resolution FPN feature map is upsampled to the full input size (H, W) and concatenated with $\mathbf{Z}$ (also upsampled to (H, W)). A convolutional residual fusion block then distills this combined signal into $\hat{\mathbf{Z}}$. Starting from $\hat{\mathbf{Z}}$, a terminal convolutional residual block diverges into a mask head, which outputs logits corresponding to the edited regions.

3.3 Noise-Calibrated Progressive Domain Adaptation

A central bottleneck in text-driven IML is the absence of pixel-accurate ground truth, which causes models trained only on inpainting data to conflate stochastic diffusion noise with semantic change. We address this with a two-stage strategy. **Stage I** pre-trains SIGMA on inpainting data with exact masks via $\mathcal{L}_{\text{seg}} = \text{BCE}(f(I_{\text{inp}}^o, I_{\text{inp}}^e), M^{\text{inp}}) + \text{Dice}(f(I_{\text{inp}}^o, I_{\text{inp}}^e), M^{\text{inp}})$, yielding a strong prior for localized-edit detection but leaving it overly sensitive to global pixel perturbations.

Stage II adapts SIGMA to unlabeled text-driven pairs from public corpora (AnyEdit [8], CrispEdit-2M [34], OmniEdit-Filtered-1.2M [35], PromptfixData [36]) with three self-supervised signals on top of the retained $\mathcal{L}_{\text{seg}}$. **(i) Noise calibration:** for each I^o , a VAE-roundtrip $\hat{I}^o = \mathcal{V}_{\text{dec}}(\mathcal{V}_{\text{enc}}(I^o) + \epsilon)$ ($\epsilon \sim \mathcal{N}(0, \sigma^2 \mathbf{I})$, $\mathcal{V} \in \text{SD } 1.5/\text{SDXL}$, $\sigma \sim \mathcal{U}(0, 0.08)$) yields a semantically identical reference whose ground truth is all-zero, supervised by $\mathcal{L}_{\text{calib}} = \text{BCE}(f(I^o, \hat{I}^o), \mathbf{0})$. **(ii) EMA self-training:** an EMA teacher f_{θ}^{EMA} supplies confident pseudo-labels $\hat{M}$ on (I^o, I^e) , used by $\mathcal{L}_{\text{pl}} = C(\hat{M}) \cdot \text{BCE}(f(I^o, I^e), \text{sg}(\hat{M}))$ with $C(\hat{M}) = \mathbf{1}[\hat{M} > 0.8] + \mathbf{1}[\hat{M} < 0.2]$. **(iii) Edit-noise disentanglement:** on the predicted-edit support P , we contrast the DRB difference vectors of the real edit pair and the noise pair via $\mathcal{L}_{\text{disent}} = \frac{1}{|P|} \sum_{i \in \Omega_p} P_i \max(0, \langle \mathbf{d}_{\text{edit}}^{(i)}, \mathbf{d}_{\text{noise}}^{(i)} \rangle)$, pushing them into separable feature subspaces. The full objective $\mathcal{L}_{\text{Stage II}} = 10\mathcal{L}_{\text{seg}} + 0.1\mathcal{L}_{\text{calib}} + 0.5\mathcal{L}_{\text{pl}} + 0.5\mathcal{L}_{\text{disent}}$ assigns the dominant weight to the only strongly supervised term while preventing collapse on the self-supervised streams.

4 Experiments and Analysis

4.1 Experimental Setup

Datasets. We use three groups of datasets: (i) For evaluation, we adopt five text-driven forgery localization benchmarks that provide original images, edited images, and pixel-level ground-truth masks: CoCoGlide [13], AutoSplice [24], MagicBrush [25], DEAL-300K [26], and OpenSDI [27], where all benchmarks except OpenSDI provide explicit text instructions describing the edits. They are used both to compare the mask quality of SIGMA against existing automatic generators and as held-out test sets for evaluating the cross-dataset generalization of IML detectors fine-tuned on SIGMA-annotated data. (ii) To generate large-scale training IML data, we employ SIGMA on four extensive public image-editing corpora that were originally distributed without pixel-level annotation masks: AnyEdit [8], CrispEdit-2M [34], OmniEdit-Filtered-1.2M [35], and PromptfixData [36]. Together, these corpora comprise millions of (*original*, *edited*, *instruction*) triplets across a broad range of editors and edit types. (iii) For Stage I training of SIGMA, we utilize the BR-Gen[37] dataset, specifically concentrating on image inpainting operations.

Comparative methodologies for mask generation. We compare SIGMA against two families of baselines: (i) pixel-differencing variants without learning, including **PixDiff-Fixed**(τ) with $\tau \in \{0, 10, 20, 30, 40\}$, **PixDiff-Fixed-morph** (on the PixDiff-Fixed binary mask at $\tau=25$, we apply morphological opening (5×5 kernel) followed by closing), and **PixDiff-Otsu** (automatic thresholding); and (ii) learning-based change detectors adapted from remote sensing, namely **DDPM-CD** [30] and **Meta-CD** [29]. For fair comparison, the two learning-based baselines are trained on the same inpainting dataset used in SIGMA’s Stage I.

Implementation details. We employ DINOv2-Base [11] as a frozen feature-extraction backbone and set the number of DRB modules to 2. The number of iterative refinement steps K employed in the Bidirectional Cross-Modal Refinement procedure is fixed to 2. The model is optimized using AdamW (with $\beta_1 = 0.9$, $\beta_2 = 0.999$, and weight decay = 0.05), an initial learning rate of 10^{-3} with cosine annealing, and a batch size of 8 on a single NVIDIA A100 GPU. Input images are resized to 518×518 pixels. Data augmentation consists of synchronized random horizontal flipping and

Table 1: Quantitative comparison across different datasets. F1 and IoU scores (%) are reported.

Methods	Datasets											
	CoCoGlide		AutoSplice		MagicBrush		DEAL-300K		OpenSDI		Average	
	F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU
PixDiff-Fixed($\tau = 0$)	35.46	25.22	53.90	40.94	23.48	14.79	16.38	10.33	24.65	16.17	30.77	21.49
PixDiff-Fixed($\tau = 10$)	92.26	86.22	92.18	86.03	74.89	62.93	28.04	19.11	68.11	56.18	71.10	62.09
PixDiff-Fixed($\tau = 20$)	82.01	71.00	86.15	76.57	69.11	55.52	33.44	23.28	63.85	49.65	66.91	55.20
PixDiff-Fixed($\tau = 30$)	72.27	58.62	79.76	67.50	62.10	47.66	35.24	24.41	55.50	40.61	60.97	47.76
PixDiff-Fixed($\tau = 40$)	63.34	48.59	73.46	59.37	55.45	40.83	35.24	24.10	47.23	32.81	54.94	41.14
PixDiff-Fixed-morph	59.92	46.12	77.67	65.22	64.06	50.03	46.33	34.44	51.91	37.45	59.98	46.65
PixDiff-Otsu	62.40	46.54	62.97	47.07	51.88	36.84	34.21	23.17	50.07	34.95	52.31	37.71
Meta-CD (TGRS 2025)	73.50	62.40	86.90	77.80	76.00	64.10	45.80	33.80	74.28	62.19	71.30	60.06
DDPM-CD (WACV 2025)	97.80	96.00	96.20	92.80	89.90	83.10	20.90	13.80	83.35	76.14	77.63	72.37
SIGMA	95.62	91.84	96.69	93.74	89.03	81.91	76.43	65.31	91.37	84.82	89.83	83.52

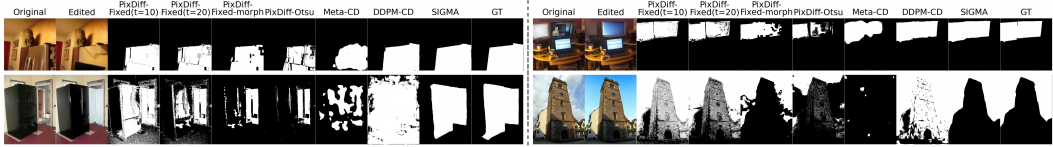


Figure 3: Qualitative comparison of SIGMA and other methods.

random cropping, applied identically to both images in each input pair. We trained the SIGMA model for 10 epochs during Stage I and subsequently fine-tuned it for an additional 5 epochs during Stage II.

4.2 Quality Assessment of Generated Masks

Tab. 1 compares mask quality across pixel-level thresholding, morphological heuristics, and learning-based change detection. The PixDiff-Fixed family is fundamentally fragile: its best setting ($\tau=10$) reaches only 71.10% average F1 and degrades sharply for any other τ , confirming that fixed thresholds cannot generalize without dataset-specific tuning; adaptive PixDiff-Otsu fares no better (52.31% F1). Learning-based baselines suffer from severe cross-domain fragility: DDPM-CD [30] excels on CoCoGlide (97.80% F1) yet collapses on DEAL-300K (20.90% F1), making it unreliable as a general-purpose annotator. In contrast, SIGMA establishes a new state of the art with **89.83% average F1 and 83.52% IoU** after Stage II, surpassing the strongest baseline (DDPM-CD, 77.63% F1) by +12.20% on average. Crucially, the biggest gains appear exactly on the toughest benchmarks: the ones where existing methods collapse most. This is most notable on DEAL-300K, where we achieve a striking +55.53% F1 over DDPM-CD. This pattern underscores genuine robustness rather than dataset-specific overfitting. Qualitative comparisons (Fig. 3) reveal that pixel-difference baselines fail under dense synthesis noise, while Meta-CD and DDPM-CD show complementary failure modes, namely over-dilated masks and missed fine-grained edits, respectively. SIGMA, in contrast, closely matches the ground truth across object-level, identity, and largely edits, visually corroborating its quantitative superiority and reinforcing the necessity of semantic-level, instruction-grounded reasoning.

4.3 Robustness to Post-Processing Operations

To assess the robustness of SIGMA to typical post-processing operations, we subject the test images to three widely used perturbations: JPEG compression (quality factor $QF \in \{90, \dots, 60\}$), additive white Gaussian noise with variance $\sigma^2 \in \{5, \dots, 25\}$, and Gaussian blurring with kernel sizes $\in \{3, \dots, 15\}$. We then quantitatively compare the performance of SIGMA against PixDiff-Fixed ($\tau=10$), Meta-CD [29], and DDPM-CD [30] on the AutoSplice and OpenSDI benchmarks. As shown in Fig. 4, SIGMA delivers near-flat curves across all three perturbation types and severity levels on both benchmarks, holding ~ 0.95 F1 on AutoSplice and ~ 0.91 F1 on OpenSDI throughout. In contrast, PixDiff-Fixed collapses under Gaussian noise (e.g., from ~ 0.92 to ~ 0.56 on AutoSplice at $\sigma^2=25$), confirming that pixel-difference signals are intrinsically vulnerable to additive perturbations; Meta-CD and DDPM-CD degrade visibly under blur, with Meta-CD dropping by over 0.24 F1 from clean to a 15×15 kernel on AutoSplice and from ~ 0.74 to ~ 0.41 on OpenSDI, while DDPM-CD declines by ~ 0.13 on AutoSplice and from ~ 0.83 to ~ 0.67 on OpenSDI under the same kernels. These results confirm that the semantic-feature differencing at the heart of SIGMA confers

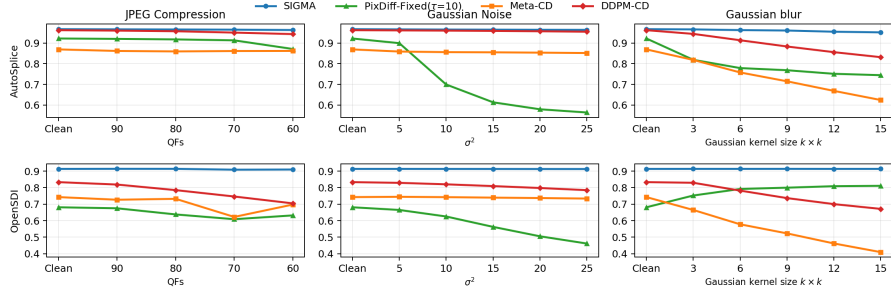


Figure 4: Evaluation of the robustness of SIGMA and comparative baseline methods to JPEG compression, additive white Gaussian noise, and Gaussian blurring on the AutoSplice and OpenSDI datasets.

Table 2: SIGMA-annotated (SA) data improves the cross-dataset generalization of six representative IML detectors. For each method we compare its publicly released weights (Public Weight) against weights fine-tuned on our SIGMA-annotated dataset (Finetune w/ SA) on five held-out benchmarks. F1 and IoU scores (%) are reported; better results within each method are in **bold**.

Method	Weights	AutoSplice		CocoGlide		DEAL300K		MagicBrush		OpenSDI		Average	
		F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU
CAT-Net	Public Weight	41.49	31.79	40.97	33.69	12.14	8.75	5.33	3.29	7.32	5.27	21.45	16.56
	Finetune w/ SA	60.82	47.23	45.53	34.42	29.99	20.98	61.02	50.05	27.02	18.14	44.88	34.16
MVSSNet	Public Weight	18.04	12.22	32.80	25.30	5.43	3.61	1.79	1.01	1.46	0.91	11.90	8.61
	Finetune w/ SA	54.14	41.43	35.63	25.38	20.05	13.29	81.95	73.72	21.69	14.51	42.69	33.67
IML-ViT	Public Weight	25.19	17.44	31.54	24.59	13.69	9.45	4.94	2.79	13.87	10.06	17.85	12.87
	Finetune w/ SA	37.67	27.85	43.21	34.06	27.51	19.65	13.69	8.74	14.86	10.86	27.39	20.23
PSCC-Net	Public Weight	56.36	43.83	50.85	40.6	20.19	13.69	14.87	9.37	14.5	9.64	31.35	23.43
	Finetune w/ SA	57.06	45.46	42.3	31.45	21.16	14.2	36.69	26.67	22.44	15.25	35.93	26.61
TruFor	Public Weight	32.69	25.52	28.33	24.33	9.26	6.77	2.51	1.48	6.93	5.22	15.94	12.66
	Finetune w/ SA	63.42	50.63	58.72	47.34	27.85	18.92	28.35	20.06	27.02	19.2	41.07	31.23
MTCL	Public Weight	23.85	19.53	44.75	34.72	3.13	1.81	7.76	5.71	6.21	4.51	17.14	13.26
	Finetune w/ SA	57.51	47.88	51.16	41.07	12.47	7.77	27.07	20.29	20.27	15.39	33.70	26.48

substantially greater forensic robustness than pixel-level differencing or remote-sensing-style change detection, both of which inherit a strong dependence on the low-level statistics most affected by post-processing.

4.4 Enhancing the Generalization Ability of Existing IML Models

The principal contribution of SIGMA does not reside in its intrinsic localization accuracy, but rather in its capacity to transform large-scale, unlabeled, text-driven image editing corpora into pixel-level supervisory signals that can be effectively leveraged by arbitrary downstream IML models. We apply SIGMA to large-scale public image-editing datasets to generate corresponding mask annotations (see Appendix E for more details about the SIGMA-annotated dataset), and use the resulting data to fine-tune six representative IML models spanning diverse architectural paradigms: CAT-Net [38], MVSS-Net [39], IML-ViT [40], PSCC-Net [41], TruFor [13], and MTCL [42]. The first five models are finetuned using the implementation from [43], while MTCL [42] is finetuned with its publicly released codebase. The fine-tuned models are then evaluated on five disjoint benchmarks: AutoSplice, CoCoGlide, DEAL-300K, MagicBrush, and OpenSDI, to assess their generalization performance. As reported in Tab. 2, fine-tuning on SIGMA-annotated data yields consistent gains across all six architectures, with mean F1 improvements from +4.58% (PSCC-Net) to +30.79% (MVSSNet). The gains are most pronounced on diffusion-edit benchmarks where publicly trained detectors perform near random, for example, CAT-Net rises from 5.33% to 61.02% F1 on MagicBrush (+55.7%) and TruFor from 2.51% to 28.35% (+25.8%), confirming that off-the-shelf detectors lack exposure to generator-consistent edits, a gap directly closed by our supervision. Crucially, gains extend to DEAL-300K and OpenSDI as well, indicating that the supervision encodes generalizable manipulation cues that transfer across unseen generators rather than overfitting to a specific editor. The uniformity of

Table 3: Ablation study of SIGMA’s architectural components and training strategy across five benchmarks. The first six rows progressively add the proposed modules (MSDB, DRBs at varying depths, and IGB), while the last row adds Stage II adaptation on top of the full architecture. F1 and IoU scores (%) are reported; best results in each column are in **bold**.

Model Variants	Datasets											
	CoCoGlide		AutoSplice		MagicBrush		DEAL-300K		OpenSDI		Average	
	F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU	F1	IOU
baseline	93.80	88.90	95.49	91.79	78.34	68.00	57.89	46.22	85.54	77.13	82.21	74.41
+msdb	94.82	90.52	96.32	93.09	89.87	82.94	55.16	43.29	89.66	82.64	85.17	78.50
+msdb+2DRBs	95.60	91.81	96.82	93.98	89.81	82.82	67.20	55.92	90.75	84.03	88.04	81.71
+msdb+4DRBs	95.14	90.99	96.33	93.10	90.04	83.13	65.43	54.40	90.07	83.03	87.40	80.93
+msdb+8DRBs	95.32	91.32	96.33	93.08	89.23	82.09	68.70	57.31	90.15	83.13	87.95	81.39
+msdb+2DRBs+IGB	94.91	90.62	96.27	92.99	87.89	80.18	75.02	63.48	90.97	84.29	89.01	82.31
+msdb+2DRBs+IGB+Stage II training	95.62	91.84	96.69	93.74	89.03	81.91	76.43	65.31	91.37	84.82	89.83	83.52

these gains across frequency-domain, spatial-channel, and transformer-based detectors confirms that SIGMA-annotated data serves as a model-agnostic supervisory resource: rather than designing yet another IML architecture, our framework unlocks the long-untapped scale of text-driven editing data, helping the entire IML ecosystem keep pace with rapidly evolving AI-generated forgery threats.

4.5 Ablation Studies

Architectural components. Tab. 3 reports the ablation. Replacing single-scale differencing with the **Multi-Scale Difference Block (MSDB)** yields +2.96% F1 and +4.09% IoU on average, with the largest gains on MagicBrush (+11.53% F1) and OpenSDI (+4.12% F1), confirming that edits span heterogeneous scales and benefit from cross-level aggregation. Stacking **Difference Refinement Blocks (DRBs)** further refines the representation, but the gain is non-monotonic: 2 DRBs reach the best average (88.04% F1, 81.71% IoU), while 4 and 8 DRBs slightly degrade easier datasets (e.g., 0.46% F1 drop on CoCoGlide and 0.49% on AutoSplice from 2 to 4 DRBs). We trace this to two reinforcing effects: residual stacking steadily smooths the difference map and washes out edit boundaries, while the inpainting-bounded Stage I supervision starves deeper stacks of useful gradients—so extra parameters inject optimization noise instead of real capacity. We therefore adopt 2 DRBs by default. Adding the **Instruction-Grounding Branch (IGB)** delivers another +0.97% F1 on average and, most strikingly, raises DEAL-300K F1 from 67.20% to 75.02% (+7.82%), confirming that visual differencing alone cannot disambiguate which synthesis-induced perturbations correspond to user intent and that instruction conditioning is critical for global or semantically nuanced edits.

Training strategy. Stage I alone attains 89.01% F1 and 82.31% IoU, indicating that supervised pre-training on inpainting masks already instills a strong semantic-change prior. However, never having seen diffusion-induced reconstruction noise, it remains partially sensitive to the pervasive pixel perturbations of text-driven edits. Stage II addresses this by adapting the model to unlabeled editing pairs under three complementary objectives, noise calibration, EMA self-training, and edit-noise feature disentanglement, without requiring any pixel-level annotation in the target domain. The adaptation adds +0.82% F1 and +1.21% IoU, with the largest gains on the hardest distributions (+1.41% F1 on DEAL-300K), and additionally reverses the small regressions that Stage I alone incurs on CoCoGlide and AutoSplice.

5 Conclusion and Limitations

We presented **SIGMA**, a framework that turns publicly available image-editing datasets into pixel-accurate supervision for image manipulation localization (IML). Building on the observation that pixel differencing and instruction-only grounding are complementary but individually insufficient under diffusion-based editing, SIGMA performs semantic-feature differencing in a frozen foundation backbone and fuses it with a parsed-instruction prior via bidirectional cross-modal refinement, while a two-stage training strategy bridges supervision scarcity and the diffusion-domain shift. SIGMA outperforms existing automatic mask generators by **+12.20%** F1 on five benchmarks and, when applied to public editing corpora, yields a million-scale IML training set that boosts six diverse detectors by **+18.34%** F1 in cross-dataset generalization, establishing SIGMA-annotated data as a model-agnostic supervisory resource for the IML community.

Broader Impact. SIGMA aims to strengthen detection of text-driven forgeries and thereby support media verification. The same automated mask-generation capability could in principle refine adversarial editing pipelines; however, SIGMA improves only the detector side rather than the editor, and we believe the net benefit to media integrity is positive.

References

- [1] Tim Brooks, Aleksander Holynski, and Alexei A. Efros. InstructPix2Pix: Learning To Follow Image Editing Instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023.
- [2] Amir Hertz, Ron Mokady, Jay Tenenbaum, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. Prompt-to-Prompt Image Editing with Cross-Attention Control. In *The Eleventh International Conference on Learning Representations*, September 2022.
- [3] Shiyu Liu, Yucheng Han, Peng Xing, Fukun Yin, Rui Wang, Wei Cheng, Jiaqi Liao, Yingming Wang, Honghao Fu, Chunrui Han, et al. Step1x-edit: A practical framework for general image editing. *arXiv preprint arXiv:2504.17761*, 2025.
- [4] Black Forest Labs, Stephen Batifol, Andreas Blattmann, Frederic Boesel, Saksham Consul, Cyril Diagne, Tim Dockhorn, Jack English, Zion English, Patrick Esser, et al. Flux. 1 kontext: Flow matching for in-context image generation and editing in latent space. *arXiv preprint arXiv:2506.15742*, 2025.
- [5] Chenyuan Wu, Pengfei Zheng, Ruiran Yan, Shitao Xiao, Xin Luo, Yueze Wang, Wanli Li, Xiyang Jiang, Yexin Liu, Junjie Zhou, et al. Omnigen2: Exploration to advanced multimodal generation. *arXiv preprint arXiv:2506.18871*, 2025.
- [6] Chenfei Wu, Jiahao Li, Jingren Zhou, Junyang Lin, Kaiyuan Gao, Kun Yan, Sheng-ming Yin, Shuai Bai, Xiao Xu, Yilei Chen, et al. Qwen-image technical report. *arXiv preprint arXiv:2508.02324*, 2025.
- [7] Di Chang, Mingdeng Cao, Yichun Shi, Bo Liu, Shengqu Cai, Shijie Zhou, Weilin Huang, Gordon Wetzstein, Mohammad Soleymani, and Peng Wang. Bytemorph: Benchmarking instruction-guided image editing with non-rigid motions. *arXiv preprint arXiv:2506.03107*, 2025.
- [8] Qifan Yu, Wei Chow, Zhongqi Yue, Kaihang Pan, Yang Wu, Xiaoyang Wan, Juncheng Li, Siliang Tang, Hanwang Zhang, and Yueting Zhuang. Anyedit: Mastering unified high-quality image editing for any idea. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 26125–26135, 2025.
- [9] Zhenglin Huang, Jinwei Hu, Xiangtai Li, Yiwei He, Xingyu Zhao, Bei Peng, Baoyuan Wu, Xiaowei Huang, and Guangliang Cheng. Sida: Social media image deepfake detection, localization and explanation with large multimodal model. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 28831–28841, 2025.
- [10] Zhihao Sun, Haipeng Fang, Juan Cao, Xinying Zhao, and Danding Wang. Rethinking image editing detection in the era of generative ai revolution. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 3538–3547, 2024.
- [11] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *Transactions on Machine Learning Research Journal*, 2024.
- [12] Yue Wu, Wael AbdAlmageed, and Premkumar Natarajan. ManTra-Net: Manipulation Tracing Network for Detection and Localization of Image Forgeries With Anomalous Features. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9543–9552, 2019.

- [13] Fabrizio Guillaro, Davide Cozzolino, Avneesh Sud, Nicholas Dufour, and Luisa Verdoliva. TruFor: Leveraging All-Round Clues for Trustworthy Image Forgery Detection and Localization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20606–20615, 2023.
- [14] Xiao Guo, Xiaohong Liu, Zhiyuan Ren, Steven Grosz, Iacopo Masi, and Xiaoming Liu. Hierarchical Fine-Grained Image Forgery Detection and Localization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3155–3165, 2023.
- [15] Zeqin Yu, Jiangqun Ni, Yuzhen Lin, Haoyi Deng, and Bin Li. DiffForensics: Leveraging Diffusion Prior to Image Forgery Detection and Localization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12765–12774, 2024.
- [16] Lei Su, Xiaochen Ma, Xuekang Zhu, Chaoqun Niu, Zeyu Lei, and Ji-Zhe Zhou. Can We Get Rid of Handcrafted Feature Extractors? SparseViT: Nonsemantics-Centered, Parameter-Efficient Image Manipulation Localization Through Sparse-Coding Transformer. *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(7):7024–7032, 2025.
- [17] Zhipei Xu, Xuanyu Zhang, Runyi Li, Zecheng Tang, Qing Huang, and Jian Zhang. FakeShield: Explainable Image Forgery Detection and Localization via Multi-modal Large Language Models. In *The Thirteenth International Conference on Learning Representations*, October 2024.
- [18] Zhihao Sun, Haoran Jiang, Haoran Chen, Yixin Cao, Xipeng Qiu, Zuxuan Wu, and Yu-Gang Jiang. ForgerySleuth: Empowering Multimodal Large Language Models for Image Manipulation Detection. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025.
- [19] Hengrui Kang, Siwei Wen, Zichen Wen, Junyan Ye, Weijia Li, Peilin Feng, Baichuan Zhou, Bin Wang, Dahua Lin, Linfeng Zhang, et al. Legion: Learning to ground and explain for synthetic image detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 18937–18947, 2025.
- [20] Y. Hsu and S. Chang. Detecting image splicing using geometry invariants and camera characteristics consistency. In *IEEE Inter. Conf. Multim. Expo*, pages 549–552. IEEE, 2006.
- [21] J. Dong, W. Wang, and T. Tan. Casia image tampering detection evaluation database. In *IEEE China Summit Inter. Conf. Signal Info. Proc.*, pages 422–426, 2013.
- [22] Adam Novozamsky, Babak Mahdian, and Stanislav Saic. IMD2020: A large-scale annotated dataset tailored for detecting manipulated images. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision Workshops*, pages 71–80, 2020.
- [23] Gaël Mahfoudi, Badr Tajini, Florent Retraint, Frederic Morain-Nicolier, Jean Luc Dugelay, and PIC Marc. DEFACTO: Image and face manipulation dataset. In *Proceedings of the European Signal Processing Conference*, pages 1–5, 2019.
- [24] Shan Jia, Mingzhen Huang, Zhou Zhou, Yan Ju, Jialing Cai, and Siwei Lyu. AutoSplice: A Text-Prompt Manipulated Image Dataset for Media Forensics. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 893–903, 2023.
- [25] Kai Zhang, Lingbo Mo, Wenhui Chen, Huan Sun, and Yu Su. MagicBrush: A Manually Annotated Dataset for Instruction-Guided Image Editing. *Advances in Neural Information Processing Systems*, 36:31428–31449, 2023.
- [26] Rui Zhang, Hongxia Wang, Hangqing Liu, Yang Zhou, and Qiang Zeng. Deal-300k: Diffusion-based editing area localization with a 300k-scale dataset and frequency-prompted baseline. *arXiv preprint arXiv:2511.23377*, 2025.
- [27] Yabin Wang, Zhiwu Huang, and Xiaopeng Hong. OpenSDI: Spotting Diffusion-Generated Images in the Open World. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4291–4301, 2025.

- [28] Wele Gedara Chaminda Bandara and Vishal M. Patel. A Transformer-Based Siamese Network for Change Detection. In *IGARSS 2022 - 2022 IEEE International Geoscience and Remote Sensing Symposium*, pages 207–210, 2022.
- [29] Junyu Gao, Da Zhang, Feiyu Wang, Lichen Ning, Zhiyuan Zhao, and Xuelong Li. Combining SAM With Limited Data for Change Detection in Remote Sensing. *IEEE Transactions on Geoscience and Remote Sensing*, 63:1–11, 2025.
- [30] Wele Gedara Chaminda Bandara, Nithin Gopalakrishnan Nair, and Vishal M. Patel. DDPM-CD: Denoising Diffusion Probabilistic Models as Feature Extractors for Remote Sensing Change Detection. In *2025 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 5250–5262, 2025.
- [31] Qwen An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxin Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yi-Chao Zhang, Yanyang Wan, Yuqi Liu, Zeyu Cui, Zhenru Zhang, Zihan Qiu, Shanghaoran Quan, and Zekun Wang. Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*, 2024.
- [32] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. In *European conference on computer vision*, pages 38–55. Springer, 2024.
- [33] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. Sam 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024.
- [34] Wei Chow, Linfeng Li, Lingdong Kong, Zefeng Li, Qi Xu, Hang Song, Tian Ye, Xian Wang, Jinbin Bai, Shilin Xu, et al. Editmgt: Unleashing potentials of masked generative transformers in image editing. *arXiv preprint arXiv:2512.11715*, 2025.
- [35] Cong Wei, Zheyang Xiong, Weiming Ren, Xeron Du, Ge Zhang, and Wenhui Chen. Omniedit: Building image editing generalist models through specialist supervision. In *The Thirteenth International Conference on Learning Representations*, 2024.
- [36] Yongsheng Yu, Ziyun Zeng, Hang Hua, Jianlong Fu, and Jiebo Luo. Promptfix: You prompt and we fix the photo. *Advances in Neural Information Processing Systems*, 37:40000–40031, 2024.
- [37] Lypan Cai, Haowei Wang, Jiayi Ji, Yanshu Zhoumen, Shen Chen, Taiping Yao, and Xiaoshuai Sun. Zooming in on fakes: A novel dataset for localized ai-generated image detection with forgery amplification approach. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 2534–2542, 2026.
- [38] Myung-Joon Kwon, In-Jae Yu, Seung-Hun Nam, and Heung-Kyu Lee. CAT-Net: Compression Artifact Tracing Network for Detection and Localization of Image Splicing. In *2021 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 375–384, 2021.
- [39] Chengbo Dong, Xinru Chen, Ruohan Hu, Juan Cao, and Xirong Li. MVSS-Net: Multi-View Multi-Scale Supervised Networks for Image Manipulation Detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(3):3539–3553, March 2023.
- [40] Xiaochen Ma, Bo Du, Zhuohang Jiang, Xia Du, Ahmed Y. Al Hammadi, and Jizhe Zhou. IML-ViT: Benchmarking Image Manipulation Localization by Vision Transformer, November 2024.
- [41] Xiaohong Liu, Yaojie Liu, Jun Chen, and Xiaoming Liu. Pscc-net: Progressive spatio-channel correlation network for image manipulation detection and localization. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(11):7505–7517, 2022.

- [42] Haodong Li, Peiyu Zhuang, Yang Su, and Jiwu Huang. Towards generalizable and robust image tampering localization with multi-task learning and contrastive learning. *Expert Systems with Applications*, 270:126492, April 2025.
- [43] Xiaochen Ma, Xuekang Zhu, Lei Su, Bo Du, Zhuohang Jiang, Bingkui Tong, Zeyu Lei, Xinyu Yang, Chi-Man Pun, Jiancheng Lv, et al. Imdl-benco: A comprehensive benchmark and codebase for image manipulation detection & localization. *Advances in Neural Information Processing Systems*, 37:134591–134613, 2025.

A Scale Disparity between Image Editing and IML Datasets

A core motivating premise of this work is the substantial scale asymmetry between publicly available image-editing datasets and image manipulation localization (IML) datasets that supply pixel-accurate masks. We document this asymmetry quantitatively in Fig. 5, plotting both groups on a shared linear axis to make the gap directly visible. Editing datasets already contain (*original*, *edited*, *instruction*) triplets that, by construction, share the manipulation distribution targeted by modern IML; the only missing ingredient is the pixel-level mask. Conversely, IML datasets carry the masks but are limited in scale, in the diversity of editors covered, and in their coverage of the latest text-driven editing paradigms (e.g., FLUX Kontext, OmniGen2, Qwen-Image-Edit).

This observation grounds the central question of the paper: rather than collecting another IML benchmark from scratch, can we automatically annotate the editing corpora that already exist? SIGMA is the affirmative answer. By generating pixel-level accurate masks for arbitrary text-driven editing pairs, our approach converts four large-scale datasets (AnyEdit[8], CrispEdit-2M[34], OmniEdit-Filtered-1.2M[35], and PromptfixData[36]) to SIGMA-annotated dataset (see Appendix E for more details) into rich supervisory signals that can be leveraged by any downstream IML detector. In doing so, it converts a vast, long-neglected data reservoir into a powerful, model-agnostic IML training pool.

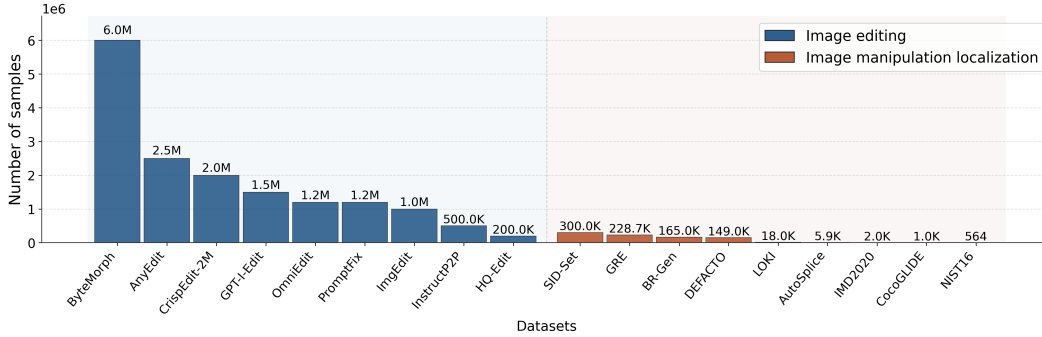


Figure 5: Sample counts of public image-editing datasets (blue) and IML datasets (orange) on a shared linear scale.

B Parsing Editing Instructions into Transformation Tuples

Table 4 primarily reports the original and edited concepts embodied in several representative editing instructions, together with their corresponding editing operations. We anticipate that our STP module will efficiently process these instructions, accurately identify the principal conceptual representations, and extract the precise editing operations they specify.

C The Prompt used in Semantic Transformation Parser

Fig. 6 presents the prompt we developed for the Semantic Transformation Parser module. Its primary components comprise task configuration, output format specifications, task definition, rule-based constraints, and contextualized examples. By employing this prompt, we can systematically elicit the large language model’s inference of the tuple (c^o, c^e, op) from a given instruction.

Table 4: Representative editing instructions and the semantic transformation tuples (c^o, c^e, op) extracted by our STP module. $\emptyset$ denotes an empty concept slot, used when an instruction introduces a new concept (*add*), removes an existing one (*remove*), or alters the image globally without a specific subject (*global*).

Instruction	c^o	c^e	op
“remove the cat”	“a cat”	$\emptyset$	remove
“add a hat on the person”	$\emptyset$	“a hat”	add
“turn the wood into marble”	“wood texture”	“marble texture”	replace
“Change the boy’s grey striped t-shirt to a bright blue t-shirt”	“grey striped t-shirt”	“blue t-shirt”	attribute change
“make it more dramatic”	$\emptyset$	$\emptyset$	global

```

SYSTEM_PROMPT = """You are an expert at understanding image editing instructions.
Convert each instruction into EXACTLY one JSON object with these keys:
- "original concept"
- "edited concept"
- "action type"

Allowed values for "action type" are only:
1) "add"
2) "remove"
3) "attribute change"
4) "replace"
5) "global"

Definitions:
- add: a new object/concept is introduced.
- remove: an existing object/concept is deleted.
- attribute change: same object identity, only attribute/state/color/pose/
expression/action/style detail changes.
- replace: one object/concept is swapped with another object/concept.
- global: whole-image change (e.g., weather, season, style, lighting,
time of day).

Rules:
- Return strict JSON only, no markdown, no extra text.
- If information is implicit, infer concise concepts.
- Keep concepts short noun phrases.

Examples:
Instruction: "add a bird"
{"original concept": "null", "edited concept": "a bird", "action type": "add"}

Instruction: "remove the umbrella"
{"original concept": "umbrella present", "edited concept": "null",
 "action type": "remove"}

Instruction: "change the red flowers to white flowers"
{"original concept": "red flowers", "edited concept": "white flowers",
 "action type": "attribute change"}

Instruction: "replace the cat with a dog"
{"original concept": "cat", "edited concept": "dog", "action type": "replace"}

Instruction: "make it snowy"
{"original concept": "null", "edited concept": "null", "action type": "global"}
"""

```

Figure 6: System prompt used by our Semantic Transformation Parser (STP).



Figure 7: The Visualization of the intermediate image outputs of the text-grounding branch.

D Visualization of the Instruction-Grounding Branch

Fig. 7 visualizes the intermediate outputs of the instruction-grounding branch on four representative editing types, illustrating how the parsed transformation tuple (c^o, c^e, op) propagates through SAM-guided attention construction and action-conditioned spatial fusion. For *attribute change* (row 1, recoloring the armchairs), STP extracts nearly identical concepts that differ only in the color attribute, so A^o and A^e both highlight the armchair regions, and the product rule yields a tightly localized M_{intent} that pinpoints the affected objects. For *replace* (row 2, in which the wood-and-stone interior is transformed into a white living room), the original and edited concepts, each grounded in their respective images, span broad and partially overlapping spatial regions. ACSF’s product rule preserves only those patches that express the original concept in I^o and the edited concept in I^e , specifically the walls and fireplace. This process excludes patches corresponding to unedited furniture. For *remove* (row 3, removing the garland), c^e describes a residual “mantel without garland”; A^o cleanly localizes the garland on I^o , ACSF outputs A^o as the intent map, and the removed region is faithfully recovered.

Row 4 (*add*) is informative as a *failure case* of instruction grounding alone: STP over-extracts the contextual phrase “two green armchairs with a wooden coffee table between them” as c^e , causing A^e to highlight not only the newly added table but also the surrounding armchairs that were never edited. Since the *add* rule directly forwards A^e as M_{intent} , the resulting prior inherits this contamination, illustrating that the instruction-grounding branch is intrinsically vulnerable to the precision limits of off-the-shelf parsers and grounders. This specific failure mode illustrates why the instruction branch is not designated as authoritative. Within the complete SIGMA pipeline, the bidirectional cross-modal refinement module validates M_{intent} against the available semantic evidence. The unaltered armchairs, which exhibit no discernible semantic modifications, are subsequently attenuated or filtered out by the semantic branch during the multimodal fusion stage. The example thus concretely supports our central design decision: semantic differencing and instruction grounding must serve as *mutually verifiable* sources rather than either being trusted alone.

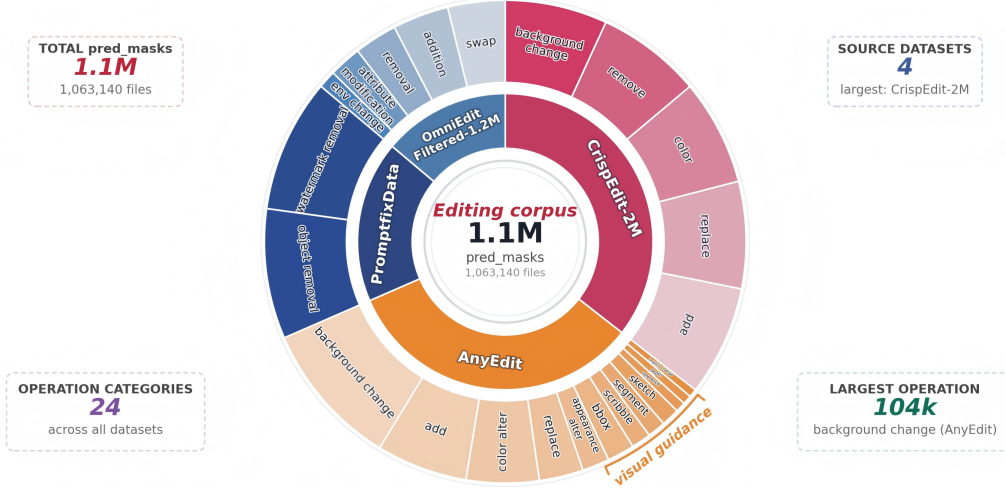


Figure 8: Overview of SIGMA-converted IML training data from four generative image editing corpora and their editing operation taxonomy.

E Details of the SIGMA-annotated Dataset

We build a large-scale, annotation-rich IML dataset by systematically mining four public generative image editing corpora: AnyEdit[8], CrispEdit-2M[34], OmniEdit-Filtered-1.2M[35], and PromptfixData[36]. Each corpus comprises paired original and edited images, accompanied by structured editing metadata, which we transform using SIGMA into a precise, fully automated localization signal, thereby obviating any requirement for manual annotation.

As shown in Fig. 8, the final dataset contains $\sim 1.1\text{M}$ image pairs covering 24 distinct categories of editing operations, with substantial diversity in both editing semantics and visual appearance. The four sources offer complementary coverage across manipulation regimes. AnyEdit[8] provides the broadest semantic coverage to date, comprising 12 carefully curated and specialized operation types. The most frequent categories include large-scale background modification (103K instances), object addition (64K instances), and color transformation (51K instances). The benchmark further incorporates highly localized, brush-level editing primitives (visual scribble, visual segment, and visual sketch), which collectively impose stringent requirements on ultra-fine spatial localization and thus serve as rigorous stress tests for high-precision editing capabilities. CrispEdit-2M[34] provides the largest single-source corpus (377K samples), characterized by a well-balanced distribution over five object-centric transformation types: addition, background modification, color alteration, object removal, and object replacement, thereby furnishing robust coverage of high-frequency editing intents observed in real-world image manipulation scenarios. OmniEdit-Filtered-1.2M[35] introduces a set of structurally distinct edit categories, including attribute modification, attribute swapping, and environment transformation. These categories are designed to encompass complex, composite multi-attribute manipulations that present qualitatively different challenges compared to conventional single-operation forgeries. PromptfixData[36] places a distinctive emphasis on object removal and watermark removal (187K instances), thereby directly addressing the practically important yet historically underexplored problem of content-erasure forgeries. Collectively, these dataset design choices mitigate the dominance of any single editing modality and extend the localization problem to cover a continuum of manipulations, ranging from coarse regional edits to fine-grained, pixel-level erasures.

Ground-truth localization masks are derived automatically from SIGMA as high-fidelity, binary, pixel-level annotations that precisely delineate manipulated regions. Since all source images are generated using contemporary text-guided, diffusion-based editing pipelines, the resulting forgeries exhibit generator-consistent texture statistics, realistic illumination harmonization, and strong semantic coherence. These characteristics distinguish them from traditional cut-and-paste splicing operations and render them representative of the forensic challenges associated with modern AI-generated and AI-edited imagery.