


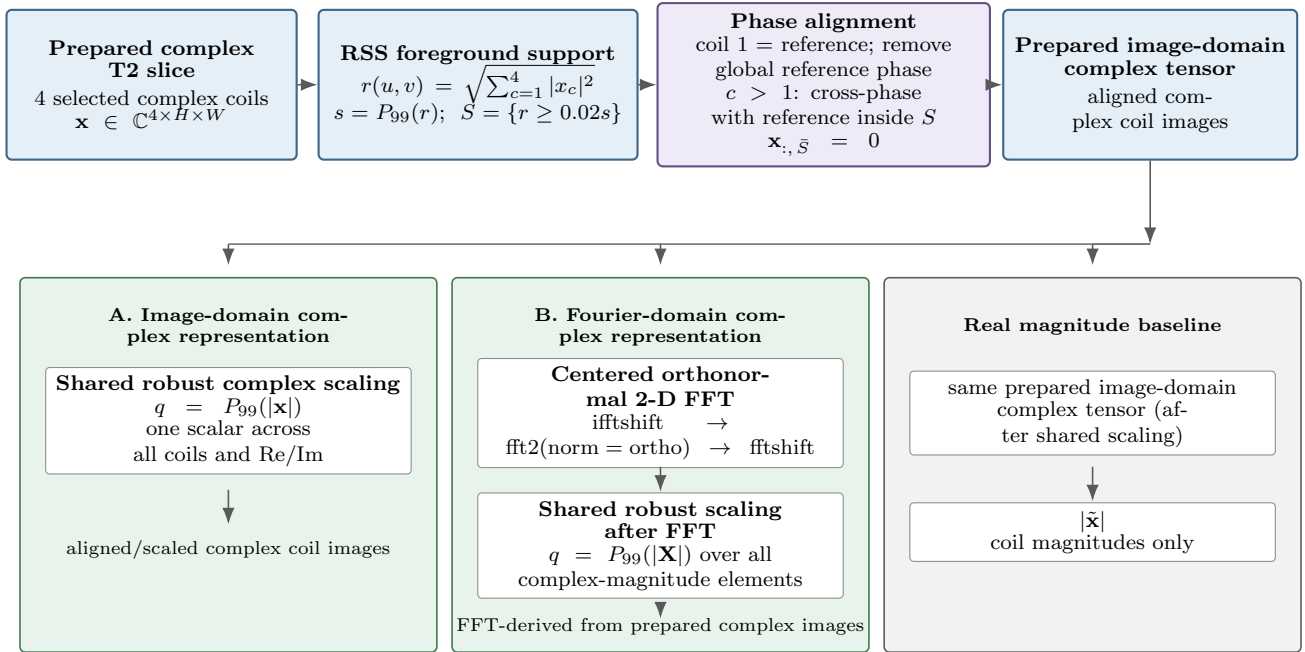

The shared scaling rule uses one sample-level 99th-percentile magnitude scalar. In the Fourier arm, this scalar is computed after the centered FFT; the input is therefore FFT-derived from prepared images, not untouched scanner raw k-space.

Figure 2. Preprocessing and representation pipeline used for the factorial study. Four prepared complex coil images are used to estimate an RSS foreground support, align global inter-coil phase offsets, and apply a shared sample-level robust magnitude scale within each representation. Complex models receive either the aligned image-domain tensor or its centered orthonormal FFT, while the real baseline receives the corresponding coil magnitudes.