

An Inspiring Title for the MELBA Journal Sample Article

Adrian V. DALCA
EECS, Massachusetts Institute of Technology, Cambridge, MA, USA

adalca@mit.edu

Mert R. Sabuncu <https://orcid.org/0000-1111-2222-3333>
School of Electrical and Computer Engineering, Cornell University, Ithaca, NY, USA

msabuncu@cornell.edu

Abstract

We develop a learning framework for building deformable templates, which play a fundamental role in many image analysis and computational anatomy tasks. Conventional methods for template creation and image alignment to the template have undergone decades of rich technical development. In these frameworks, templates are constructed using an iterative process of template estimation and alignment, which is often computationally very expensive. Due in part to this shortcoming, most methods compute a single template for the entire population of images, or a few templates for specific sub-groups of the data. In this work, we present a probabilistic model and efficient learning strategy that yields either universal or *conditional* templates, jointly with a neural network that provides efficient alignment of the images to these templates. We demonstrate the usefulness of this method on a variety of domains, with a special focus on neuroimaging. This is particularly useful for clinical applications where a pre-existing template does not exist, or creating a new one with traditional methods can be prohibitively expensive. Our code is available at <http://yoururl.com>.

Keywords: Machine Learning, Image Registration

1. Introduction

A deformable template is an image that can be geometrically deformed to match images in a dataset, providing a common reference frame. Templates are a powerful tool that enables the analysis of geometric variability. They have been used in computer vision, medical image analysis, graphics, and time series signals.

2. Related Works

Spatial alignment, or registration, between two images is a building block for estimation of deformable templates. Alignment usually involves two steps: a global affine transformation, and a deformable transformation (as in many optical flow applications).

Use `\cite{}` for reference that is part of the sentence, and `\citep{}` for references in parenthesis. For example, Viola and Wells III (1997) is awesome. Also, this is a citation (Viola and Wells III, 1997).

5. Table and Figures

Table 1: By convention, Table caption goes on top.

| Left | center | right |
|-------------|---------------|--------------|
| 111 | 222 | 333 |
| 444 | 555 | 666 |

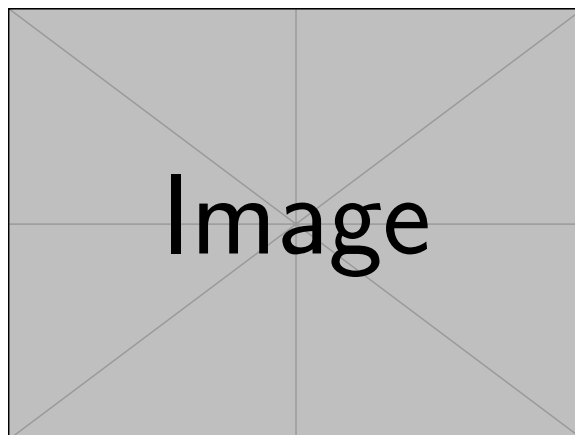


Figure 1: Example figure. Notice that the caption goes below.

Acknowledgments

This work was supported by grants X, Y and Z. We also acknowledge important conversations with our colleagues A, B and C.

Ethical Standards

The work follows appropriate ethical standards in conducting research and writing the manuscript, following all applicable laws and regulations regarding treatment of animals or human subjects.

Conflicts of Interest

The conflicts of interest have not been entered yet.

References

Paul Viola and William M Wells III. Alignment by maximization of mutual information. *International journal of computer vision*, 24(2):137–154, 1997.

Appendix A. Proof of the central theorem

In this appendix we prove the central theorem and present additional experimental results.
Remainder omitted in this sample.

Appendix B. Section

B.1 Subsection

B.1.1 SUBSUBSECTION

Paragraph Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.