

CSim Design Notes

Architecture, decisions, and performance notes

Project author + collaborative notes (Grok Build)

Started 2026-07-28 (living document; current-state audit 2026-08-02)

Abstract

This document is the **durable design memory** for CSim (Cell Simulator): what the code is doing today, why packages and abstractions exist, and how the **render command** / **token** path, cellular automata rules, and headless tests fit together.

The token migration (Phases 1–6) and the performance ladder (dirty visual path, UI batching, double-buffer sim, RGB fade + dirty-rect PBO uploads) are reflected in the “current state” sections and the decision log. Sections marked as *inferred* were reverse-engineered; correct them freely. Append new decisions rather than silently rewriting history.

Contents

1	How to use this document	3
1.1	Purpose	3
1.2	Conventions	3
1.3	Workflow for future sessions	3
1.4	Building the PDF	3
2	Project overview	4
2.1	What CSim is	4
2.2	High-level system diagram	4
2.3	Runtime one-liner	4
2.4	Non-goals (current)	4
3	Source layout	5
3.1	Related trees (not packages)	5
3.2	Naming landmine (Windows)	5
3.3	Include style (current practice)	5
4	Runtime loop and modules	5
4.1	CellMain	5
4.2	Illumo as composition root	6
4.3	IModule contract	6
4.4	Frame flow (conceptual)	7
5	Rendering — current state	7
5.1	What actually draws frames today	7
5.2	Drawable design (current)	7
5.3	Canvas presentation (RGB fade + dirty rects)	8

5.4	Backend surface	8
5.5	UI tokens	8
5.6	Tests (headless)	8
5.7	Remaining pain points (non-blocking)	8
6	Rendering — architecture and remaining work	9
6.1	Goals (achieved)	9
6.2	Vocabulary	9
6.3	Frame pipeline (current)	10
6.4	Layering	10
6.5	Drawable meaning	10
6.6	Migration phases (historical checklist)	10
6.7	Acceptance criteria (migration “done”)	11
6.8	Optional future work	11
7	Game domain and rulesets	11
7.1	CellGameModule	11
7.2	CellContext	11
7.3	Canvas (domain + view + GPU — D-C1)	12
7.4	Scale walls (simulation / memory)	12
7.5	Rulesets	12
7.6	Cell encoding	13
8	Services, foundation, platform	13
8.1	Services	13
8.2	Foundation	13
8.3	Platform	13
8.4	Third-party	14
9	Design decision log	14
10	Open questions	21
11	Glossary	22
A	Build notes	23
A.1	Configure & build (Windows)	23
A.2	Tests (headless)	23
A.3	Known setup issues	23
A.4	House style (CONTRIBUTING)	23
B	Key file map	23
B.1	Archive	24

1 How to use this document

1.1 Purpose

- Survive context resets (new chats, compacted histories).
- Record **why**, not only **what**.
- Describe the **current** architecture (token renderer, CA sim, tests) and any remaining polish work.
- Separate *observed reality* from *provisional* notes.

1.2 Conventions

Status boxes

Snapshot of maturity (prototype, shipped, production-ish).

Decision boxes

Closed choices. Prefer adding a new decision over rewriting history silently; note supersession dates.

Open boxes

Questions only the author can settle.

Inference boxes

Reverse-engineered claims. Treat as provisional.

\todoauthor{...}

Explicit author TODO inline in the prose.

1.3 Workflow for future sessions

1. Read docs/architecture-consensus.md first — the **single unified** architecture document (purpose, historical plans map, code truth, decisions, bugs, debt, work order).
2. Optionally skim section 2, section 5, section 6, section 7, and the decision log (section 9) for long-form detail.
3. Implement against those sources, not against chat memory or old PDFs alone.
4. When a decision is made, append a dated entry to the decision log **and** update architecture-consensus.
5. When code lands, update the consensus file and the “current state” sections. If docs and code disagree, **code wins** until docs catch up.

1.4 Building the PDF

From the repo root (requires a TeX distribution with `pdflatex` or `latexmk`):

```
cd docs
pdflatex csim-design-notes.tex
pdflatex csim-design-notes.tex    # second pass for refs/TOC
# or: latexmk -pdf csim-design-notes.tex
```

Output: docs/csim-design-notes.pdf.

Status / provenance

As of 2026-08-02 (current-state audit): packages under **App**, **Engine**, **Game**, ...; token renderer + mock tests shipped; Canvas uses CPU palette targets, **displayRgb** fade, and a dirty-rect RGB display texture; rules are double-buffered; headless **CSimTests** runs as part of the default build. Windows MSVC Release/Debug builds are the primary target.

2 Project overview


2.1 What CSim is

CSim is an interactive **cellular automata** (“cell”) simulator with a 2D canvas, multiple rule sets (Game of Life, Brian’s Brain, Wireworld, ...), camera navigation, edit/run modes, save/load hooks, and a small in-app command / debug surface. Rendering is currently OpenGL via GLFW/GLEW (with platform entry stubs for Linux/macOS).

Inferred from code (correct if wrong)

Historically this grew from a simpler GoL program into a mini engine shell (“Illumo”): modules, env vars, input contexts, backend interfaces, Tracy hooks. The product goal remains a cell simulator; the engine shape is partly for skill practice and multi-API future-proofing.

2.2 High-level system diagram

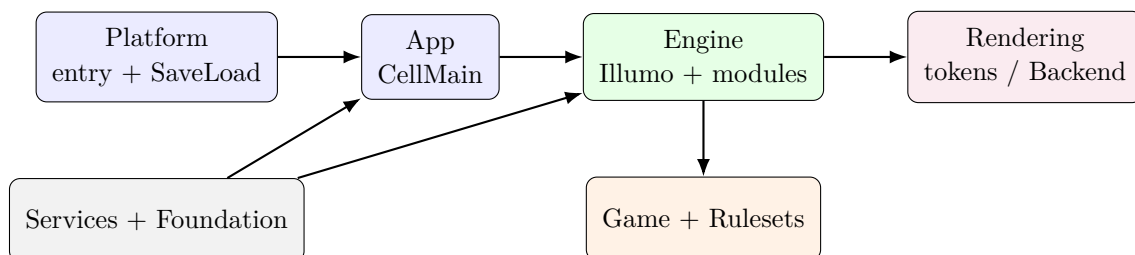

2.3 Runtime one-liner

Platform **main** → **CellMain** → construct **Illumo** → **Init** (services + modules) → loop { **Update**, **Render** } until window close.

2.4 Non-goals (current)

Open / needs author input

Confirm or rewrite. Draft non-goals:

- Not a general-purpose AAA renderer.
- Not multiplayer / networking.
- Not a full ECS game engine (entity scaffolding exists but is thin).
- Perfect Linux/macOS parity is secondary to Windows correctness for now.

3 Source layout

Source lives under `CSim/Source/`. Package names describe **responsibility**, not prestige.

Package	Role
App/	Process-level app loop after OS bootstrap (<code>CellMain</code>).
Engine/	Host: <code>Illumo</code> , <code>IModule</code> , context bag, debug module, entity scaffolding.
Game/	Domain: canvas, cell game module, editor tools (brush/cursor).
Rulesets/	Polymorphic CA rules; <code>AllSets.h</code> umbrella for active sets.
Rendering/	Window, camera, drawables, scene, RHI-ish interfaces, OpenGL backend, Mock.
Services/	Log, env vars, input, CLI (token UI), allocators, <code>SaveLoad</code> API.
Foundation/	Macros, build/sys info, math type aliases, small containers.
Assets/	Asset loaders (e.g. TTF).
Platform/	OS entry points + native dialogs / save-load.
Tests/	Headless suite (<code>CSimTests</code>): mock backend, rules, canvas, UI tokens.

3.1 Related trees (not packages)

- `CSim/Shader/` — GLSL assets copied to the build tree (`canvas_*.glsl`, `triangle_*.glsl`, UI shaders).
- `CSim/Assets/` — runtime files (fonts).
- `CSim/thirdparty/` — vendored deps (GLFW, GLEW, GLM, FreeType, Tracy, ...).
- `archive/` — historical code (old State pattern, dead render stacks). Not built.

3.2 Naming landmine (Windows)

Decision: `MathTypes.h` (2026-07-28)

Do **not** put a header named `Math.h` on a case-insensitive include path. MSVC resolves `#include <math.h>` to it and breaks the CRT/GLM. Project math aliases live in `Foundation/MathTypes.h`.

3.3 Include style (current practice)

Status / provenance

CMake adds each package directory as an include root, so both `"Logger.h"` and `"Services/Logger.h"` can work. Prefer package-prefixed includes for new code so dependencies stay visible.

4 Runtime loop and modules

4.1 CellMain

`App/CellMain.cpp` owns logger init/shutdown and the frame loop:

```
// conceptual
Logger::initLogger();
```

```

Illumo* illumo = new Illumo(argc, argv);
illumo->Init();
while (!illumo->ShouldClose()) {
    double dt = /* glfw time delta */;
    illumo->Update(dt);
    illumo->Render();
}
illumo->Shutdown();

```

4.2 Illumo as composition root

Illumo owns the long-lived services (EnvVars, RenderWindow, Camera, Renderer, AssetManager, CommandRegistry, CommandLine, InputManager, Scene) and a vector of IModule instances.

IllumoContext is a **raw-pointer bag** into those services, passed into modules at **Start**. Ownership stays on Illumo.

Inferred from code (correct if wrong)

Pattern: composition root + service locator-ish context struct (not a full service locator library). Modules are closer to subsystems than ECS systems.

4.3 IModule contract

```

class IModule {
public:
    virtual void Start(IllumoContext* context) = 0;
    virtual void Update(double dt) = 0;
    virtual void DispatchDrawables(Scene* scene) = 0;
    virtual void Exit() = 0;
};

```

- **Start** — bind inputs, allocate game state.
- **Update** — simulation / input.
- **DispatchDrawables** — contribute what should draw this frame.
- **Exit** — teardown module-owned state.


Registered modules today (from `Illumo::Init`):

- `CellGameModule` (always)
- `DebugModule` (non-NDEBUG)

D-E1 module registration

Engine/Illumo.h knows only IModule. App/CellMain.cpp constructs Illumo, calls Init, registers CellGameModule (and DebugModule in Debug), then StartModules(). Engine does not include Game headers.

4.4 Frame flow (conceptual)

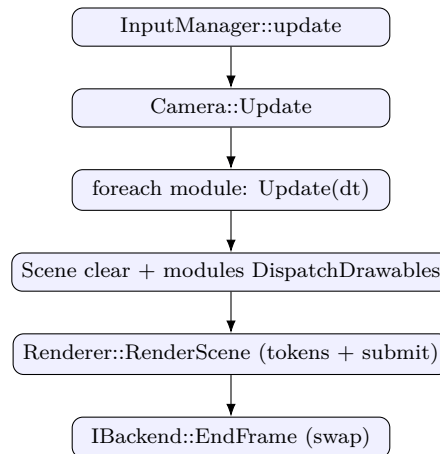

5 Rendering — current state

Status / provenance

Token migration Phases 1–6 are complete for planned scope. Live frame path is enroll + tokens + submit via `Renderer/IBackend`. Drawables emit tokens through `AppendCommands`; GL draw submission is confined to `Rendering/OpenGL/` (plus window bootstrap). Headless `Rendering/Mock/MockBackend.h` powers `CSimTests`. Canvas presentation is **CPU RGB fade + RGB display texture** with dirty-rect PBO uploads (see canonical note in `docs/architecture-consensus.md`). No second real GPU API.

5.1 What actually draws frames today

1. Modules call `DispatchDrawables` and add `DrawableBase*` pointers to `Scene` (order preserved: canvas, console, FPS, splash).
2. `Illumo::Render` drives `Renderer: BeginFrame → RenderScene → EndFrame (swap)`.
3. `Renderer::RenderScene`: clear + viewport tokens; each drawable `AppendCommands`; if a drawable returns false, legacy immediate `Draw()` still runs (hybrid fallback; production drawables return true).
4. `IBackend::SubmitCommandQueue → GLDevice::ExecuteCommandQueue` resolves handles and issues GL.

5.2 Drawable design (current)

- `DrawableBase` — type-erased list entry; virtual `Draw` + virtual `AppendCommands` (default returns false). **No GL handle ownership** on the base (D-R6).
- `Drawable<Derived>` — CRTP: `Draw → DrawImpl` for the rare immediate path.
- Production emitters (Canvas, CommandLine, GLString/SplashText) use `AppendCommands` only; `DrawImpl` is empty/no-op.

5.3 Canvas presentation (RGB fade + dirty rects)

- Domain buffer: `lifeCanvas` — one `unsigned char` per cell (state encoding: 0 = alive, 1 = dead for binary CAs; multi-state rules use additional values, e.g. Brian’s Brain dying = 2; Wireworld: head = 0, empty = 1, tail = 2, conductor = 3).
- View: CPU palette via `evalCell` → `targetRgb`; `displayRgb` eases toward targets; packed RGB `texCanvasBuffer` for upload.
- GPU: RGB display texture, updated via dirty-rect `UpdateTexture` tokens (PBO path; optional `srcRowStride`).
- Shaders: `Shader/canvas_vertex.glsl`, `Shader/canvas_frag.glsl` — sample `uDisplayTexture`.
- History: D-P4 briefly used GPU R8 + 256×1 palette (snap colors). Fade was re-stored; dirty-rect PBO + bind-state tracker from that work remain. Canonical write-up: `docs/architecture-consensus.md` §5.6.

5.4 Backend surface

`IBackend`: lifecycle, command queue push/submit/clear, enroll `CreateMesh/CreateShaderProgram/CreateTexture` (handles = `unsigned long` table IDs).

`RenderCommand`: tagged union (`CommandType` + POD payload) including pipeline, bind, uniforms, `UpdateTexture`, `UpdateBuffer`, clear, draw (D-R1).

`GLTexture::UpdateSubImage`: PBO ping-pong + dirty-rect packing; fallback to client `glTexSubImage2D` if map fails.

`GLDevice`: bind-state tracker (skip redundant program/VAO/texture/ viewport within a submit); uniform location cache; blend-func-on-enable (D-R5).

5.5 UI tokens

- `CommandLine`: one batched `UpdateBuffer` + `DrawIndexed` when open; blend for translucent panel.
- `GLString`: geometry cache — skip VBO re-upload if content/style unchanged (FPS ~1 Hz rebuilds).
- `SplashText`: mode label built on `GLString`; woken on EDIT/NORMAL.

5.6 Tests (headless)

Target `CSimTests` (alias `CSimRenderTests`); CTest names `CSimTests` / `MockBackend`. Suites: mock unit, Renderer E2E, rulesets, `CellContext`, canvas domain, UI tokens. No GPU context required.

5.7 Remaining pain points (non-blocking)

1. Hybrid immediate `Draw()` remains for *test stubs only*; production drawables are pure-token (D-R10).
2. String-named uniforms are GL-shaped debt if a second real GPU API appears (D-R9).

3. `Renderer.h` still includes GL backend headers for production construction (test injection uses `IBackend*`).
4. `RenderWindow` still uses GLEW for context create / viewport (window bootstrap, not frame submission).
5. Platform Linux/macOS render windows may still be older than the Windows path.
6. Incomplete experimental stubs (e.g. `GLBuffer`) may remain.

6 Rendering — architecture and remaining work

The token architecture below is the **shipped** design. Migration phases are kept for history; treat them as complete unless a status note says otherwise.

6.1 Goals (achieved)

1. **API isolation:** frame draw submission is via tokens; OpenGL execute path lives under `Rendering/OpenGL/`.
2. **Stable front-end:** modules contribute drawables; drawables emit handles/uniforms/updates, not raw GL.
3. **Record then execute:** per-frame command stream, single submit.
4. **Resource handles:** opaque unsigned long table IDs; backend registries map to GL objects (D-R3).
5. **Testability:** `MockBackend` + injected `IBackend` (D-R7, D-R8).

6.2 Vocabulary

Token / `RenderCommand`

A discrete instruction: bind X, set uniform Y, draw Z, update texture, ...

Command queue

Ordered buffer of tokens for the frame.

Backend

API-specific interpreter of tokens + owner of true GPU objects.


Enrollment

One-time (or rare) resource creation; returns a handle.

Front-end renderer

`Renderer`: enroll helpers, push tokens, `RenderScene`.

6.3 Frame pipeline (current)

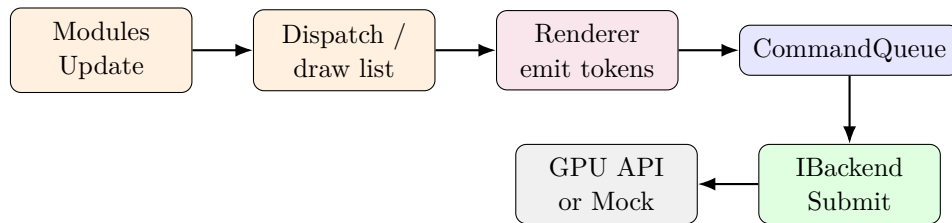

6.4 Layering

```
Game / Rulesets / UI
| (no gl* for draw submission)
v
Drawable::AppendCommands(Renderer*)
| enroll handles + push tokens
v
CommandQueue<RenderCommand> // tagged union payloads
|
v
IBackend::SubmitCommandQueue
|
+-- GLBackend + GLDevice (handle resolve, PBO upload, bind tracker)
+-- MockBackend (tests)
```

6.5 Drawable meaning

“Drawable” means *something that can append tokens* (and optionally fall back to immediate Draw). GL objects live in backend registries, not on `DrawableBase`.

Canvas end state (shipped):

- Domain: `lifeCanvas`, `dims`, `get/set`, `dirty rects`.
- View: `mesh` + `RGB fade buffers` + `RGB display texture` + `canvas shaders`; `dirty-rect UpdateTexture` (PBO); draw with MVP.
- See `docs/architecture-consensus.md` for the single canonical presentation model (R8-only notes are historical).

6.6 Migration phases (historical checklist)

1. **Phase 0 — Document & freeze vocabulary** **done**
2. **Phase 1 — Token proof path** **done** (`RenderProofQuad`, tagged union, mesh upload, handle resolve)
3. **Phase 2 — Scene through Renderer** **done**
4. **Phase 3 — Canvas tokens** **done** (later: `dirty-rect` uploads; D-P4 R8 experiment then fade restore)
5. **Phase 4 — UI drawables** **done** (`GLString`, `CommandLine`, `SplashText`)

6. **Phase 5 — Dead path cleanup** **done** (archive under `archive/dead-render/`; pure `DrawableBase`)

7. **Phase 6 — Mock backend** **done** (no second real API yet)

6.7 Acceptance criteria (migration “done”)

- ✓ Frame path is enroll + token queue + submit.
- ✓ Cell sim runs: edit, step/rules, camera, console, FPS, splash.
- ✓ `Renderer::RenderScene` is non-empty and used.
- ✓ Mock/headless tests cover tokens and domain.
- Partial: `gl*` still appears in window bootstrap and `Rendering/OpenGL/`; some non-Windows platforms lag.

6.8 Optional future work

- Generational handles / explicit destroy beyond shutdown-only (D-R4).
- Second real graphics API (only if needed).
- GPU color fade without bringing back full-grid float RGB.
- Further slim `Renderer` so production does not include GL headers in the public header (pimpl / factory).
- Linux/macOS parity with the Windows token path.

7 Game domain and rulesets

7.1 CellGameModule

Primary gameplay module. Owns a `CellContext` and an enum `CellState`:

NORMAL | EDIT | SAVE | LOAD | EXIT

Status / provenance

Mode handling is an **enum** + **switch** inside the module, not the older class-per-state hierarchy (archived under `archive/old-states/`). `E` toggles EDIT/NORMAL and wakes `SplashText`. SAVE/LOAD use Ctrl+S / Ctrl+O helpers; enum cases may still be thin. Simulation rate: env `tps` × `speedFactor`, with accumulator + step cap.

7.2 CellContext

Constructs `Canvas` from env vars (`CanvasX`, `CanvasY`) and selects a `RuleSet` from a mode string (`GAME_OF_LIFE`, `BRIANS_BRAIN`, `SEEDS`, ...). Mode changes from console/env call `setRuleSet` and `Canvas::rebuildPalette`.

7.3 Canvas (domain + view + GPU — D-C1)

- CPU grid: `lifeCanvas` (one byte per cell), dense rectangle (not chunked).
- View: CPU palette → `targetRgb`; `displayRgb` eases toward targets; `texCanvasBuffer` RGB bytes for upload.
- Token view: enrolled mesh/shader/display texture; dirty-rect `UpdateTexture` (PBO path).
- Dual role is intentional at current scale; split only if pure-sim tests or large grids require it.

7.4 Scale walls (simulation / memory)

Status / provenance

`calcGeneration` always walks the **full** grid (rect args ignored). Neighbor counts are scalar Moore/toroidal. Change detection does a second full pass for a dirty AABB (good for sparse *visual* updates, still $O(WH)$). Per cell: 1 B life + ~24 B float RGB + 3 B display tex. Default 80×60 is fine; large/infinite canvases need a redesign (chunking, bitboards, or dropping dual float fade).

7.5 Rulesets

Active rules (in `AllSets.h` / factory): Game of Life, Seeds, Brian's Brain, Highlife, Day & Night, Life Without Death, Wireworld. Stub headers remain for Rule 90 / 184 (identity `nextState`).

```
class RuleSet {
    // Pure transition: cell + Moore count of alive (value==0) neighbors.
    virtual unsigned char nextState(unsigned char cell,
                                    unsigned char aliveNeighbors) const;
    virtual void evalCell(const unsigned char& target,
                          unsigned char dest[3]) const; // palette colors
    void calcGeneration(...); // double-buffer: nextGen then memcpy
};
```

Generation (perf):

1. Count-alive neighbors from raw `lifeCanvas` (toroidal, fast wrap).
2. Write `nextState` into a scratch `nextGen` buffer.
3. If any cell changed: `memcpy` back, mark sparse dirty AABB for visual/GPU upload. Still life: no dirty.

Keep rules pure

Rulesets stay free of rendering and input. They read/write cell buffers only and expose `evalCell` for palette colors. That keeps them testable (headless `TestRuleSets`).

7.6 Cell encoding

Value	Meaning
0	Alive / Wireworld head (neighbor count treats as “live”)
1	Dead / Wireworld empty
2	Multi-state (Brian’s Brain dying; Wireworld tail)
3	Wireworld conductor

Historical neighbor tests used `!getCanvasPixel` (alive when zero). Wireworld reuses head = 0 so head-neighbor counting stays simple.

8 Services, foundation, platform

8.1 Services

Cross-cutting facilities used by Engine/Game/Rendering:

- **Logging** — `Logger` (file + terminal; level from env).
- **Config** — `EnvVars` / `IEnvVars` (defaults filled in `Illumo::Init`: canvas size, fps/tps, mode string, ...).
- **Input** — `InputManager`, `InputContext`, `KeyCode`; action binding used by the game module. No Game types (D-E2).
- **CLI** — `CommandLine` (token UI when open; batched geometry), `CommandRegistry`, `SysCmdLine`.
- **Allocators** — pool/arena/debug allocators (experimental / learning surface; not all wired into the hot path).
- **SaveLoad API** — pure declarations; OS dialogs implemented per platform.

8.2 Foundation

Headers that should stay cheap to include: macros (`MacroDefs.h`), build info, `sysinfo`, `MathTypes.h`, `ArrayQueue.h`.

Status / provenance

`MacroDefs.h` still pulls Windows headers on `_WIN32` (for `Sleep` / `__SLEEP`). That is include-heavy for a widely used header. **Deferred (D-F1)**: leave as-is until compile time, name collisions, or header hygiene actually hurt; then split platform sleep into a narrower header.

8.3 Platform

Thin ports:

- Windows: `WinMain.cpp`, `WinSaveLoad.cpp`
- Linux: `_main.cpp`, `LinuxSaveLoad.cpp` (GTK pieces may be legacy relative to GLFW-centered shared code)

- macOS: `Main.cpp`, `MacSaveLoad.mm`

Contract: bootstrap → call `CellMain` → implement `SaveLoad::GetLoadLocation / GetSaveLocation`.

8.4 Third-party

Vendored under `CSim/thirdparty/`. Policy from `CONTRIBUTING.md`: new third-party deps require review/PR. Existing: GLFW, GLEW, GLM, FreeType, JSON, STB, Tracy, image libs, ...

9 Design decision log

Append-only log. Newest entries at the bottom. If a decision is reversed, add a new entry that supersedes the old id; do not silently delete history.

D-001 — Package rename (structure)

D-001 2026-07-28

Decision: Rename/split ambiguous folders to match responsibility: `Core`→`Game`, `System`→`{App,Engine,Services}`, `Init+Util`→`Foundation`, `AssetLoaders`→`Assets`.

Why: Names were lying; slowed reasoning and migrations.

Consequences: Include/CMake paths updated; archive for old States.

D-002 — MathTypes header name

D-002 2026-07-28

Decision: Project math aliases live in `MathTypes.h`, not `Math.h`.

Why: Windows case-insensitive include collision with CRT `math.h`.

Consequences: All includes updated; Foundation README notes the trap.

D-003 — Render abstraction direction

D-003 2026-07-28 (implemented; see D-R*)

Decision: Command/token submission via `IBackend` + `RenderCommand` queue; game code must not permanently depend on raw GL for draw submission.

Why: Multi-API optionality; clearer frame boundary; testability.

Consequences: Phases 1–6 complete for planned scope (section 6.6); hybrid immediate Draw remains only as fallback.

D-004 — Module frame hooks

D-004 inferred from `IModule`

Decision: Modules expose `Start/Update/DispatchDrawables/Exit`.

Why: Separate simulation tick from draw contribution.

Consequences: Draw list is rebuilt or contributed each frame through dispatch (exact ownership policy still open).

D-005 — Rules as polymorphic sets

D-005 inferred

Decision: Each CA variant is a `RuleSet` subclass.

Why: Open for extension; shared generation sweep.

Consequences: Factory logic currently in `CellContext` string matching (could become a registry later).

D-006 — Mode handling (enum vs State classes)

D-006 current code; author may supersede

Decision (current): `CellState` enum inside `CellGameModule`.

Supersedes: class hierarchy under `archive/old-states/`.

Why (inferred): fewer types for a small mode set.

Open: SAVE/LOAD completeness; whether splash/global state is acceptable.

D-007 — Enrollment vs per-frame commands

D-007 visible in Renderer comments

Decision: Resource creation goes through enroll/Create* APIs; do not stuff mesh/shader creation into the per-frame token stream.

Why: Keep the frame queue about *binding and drawing*.

Consequences: Need an explicit destroy/reload story for hot-reload later.

D-008 — CONTRIBUTING constraints

D-008 from CONTRIBUTING.md

Decision: Avoid auto; avoid namespaces (prefer static classes/structs); no recursion; third-party via PR.

Why: Author house style / learning constraints.

Consequences: Documentation and new code should respect these unless explicitly waived in a later decision.

D-R1 — RenderCommand payload shape

D-R1 2026-07-28

Decision: `RenderCommand` uses a **simple tagged union** (`CommandType` + POD payload union), not a kitchen-sink flat struct and not a byte-stream compiler. Prefer C-style union over `std::variant`.

Why: Type-safe uniforms/clear/update data while remaining copyable for `ArrayQueue`; matches house style.

Consequences: `Rendering/RenderCommand.h` redesigned; execute path switches on type and reads the matching payload.

D-R2 — Who emits tokens

D-R2 2026-07-28

Decision: Each drawable emits its own tokens via `AppendCommands(Renderer*)` (or equivalent). `Renderer` owns frame setup (clear/viewport) and submit.

Why: Smallest strangler step from today's `DispatchDrawables` list.

Consequences: Hybrid phase may still call immediate `Draw` for unmigrated drawables after token submit.

D-R3 — Handle typing for v1

D-R3 2026-07-28

Decision: Keep `unsigned long` opaque handles with backend registries (`tableID` → GL object). Strong typedefs deferred.

Why: Minimal churn; critical fix is resolve-on-submit, not type names.

Consequences: Execute must never treat handles as raw `GLuint`s without registry lookup.

D-R4 — Migration scope

D-R4 2026-07-28

Decision: Full migration Phases 1–5 (token proof → Scene routing → Canvas → UI drawables → cleanup). Phase 6 (mock backend) included; second real GPU API still optional.

Why: Playable strangler path to API isolation without big-bang rewrite.

Also freeze for v1: destroy resources at shutdown only; Windows GL is primary platform.

Superseded in part by D-P1/D-P4: full-frame Canvas rewrite was v1 only. Dirty-rect/PBO uploads remain, while the R8 presentation was later superseded by the restored RGB fade path documented in D-P4.

D-R5 — Blend state on first enable

D-R5 2026-07-28

Decision: When enabling blending in `GLDevice::ApplyPipelineState`, always call `glBlendFunc` (do not rely on CPU-side factor cache matching defaults).

Why: OpenGL default is `ONE/ZERO`; cache defaults were `SrcAlpha/OneMinusSrcAlpha` so factors looked “unchanged” and console panel lost transparency after the token migration.

Consequences: Semi-transparent UI (console panel alpha) works again.

D-R6 — Dead stack cleanup (Phase 5)

D-R6 2026-07-28

Decision: Archive window `RenderQueue`, legacy `Drawable.cpp` GL helpers, empty `Transform/RenderContext`, and unused `CellCommandLine` under `archive/dead-render/`. `DrawableBase` is a pure list/token interface (no GL handles).

Why: Token path won; dual submission models confuse maintenance.

Consequences: `IRenderWindow::getRenderQueue` removed; frame draw list is only `Scene + Renderer`.

D-R7 — Mock backend for tests (Phase 6)

D-R7 2026-07-28

Decision: Add headless `MockBackend` implementing `IBackend`: record `Create*` and snapshot the command queue on `SubmitCommandQueue`. Originally shipped as CMake target `CSimRenderTests` / `CTest MockBackend`; the current canonical target and CTest name are `CSimTests`, with the old names retained only as compatibility aliases. Do **not** add Vulkan/Metal yet.

Why: First meaningful automated render test without a GPU context; proves token vocabulary and handle plumbing independently of GL.

Consequences: CI can run `ctest -R CSimTests`; second real API remains future work after more production needs appear.

D-R8 — Inject IBackend into Renderer

D-R8 2026-07-28

Decision: `Renderer` accepts an injected `IBackend*` via constructor (`takeOwnership` flag). Production still owns a `GLBackend`. Tests inject `MockBackend` with `takeOwnership=false`.

Why: End-to-end drawable → enroll/token → submit without a GPU; keeps production construction unchanged.

Consequences: `TestRendererE2E` covers `RenderScene`, Canvas tokens, hybrid immediate drawables, and `RenderProofQuad`.

D-P1 — Dirty visual path

D-P1 2026-07-28

Decision: `Canvas/CellGameModule` use dirty flags so idle frames skip full-grid visual work and GPU upload.

Why: Dominant cost was recoloring + full texture upload every render frame even when the CA did not step.

Consequences: `cellsDirty`, upload pending, early-out `tickVisual`; still life after sim step does not re-dirty.

D-P2 — UI batching and geometry cache

D-P2 2026-07-28

Decision: CommandLine emits one packed `UpdateBuffer`/draw when open; GLString caches GPU geometry until content/style changes.

Why: Per-line uploads and FPS string rebuilds were measurable when the console/FPS overlay was active.

Consequences: Token stream stays small; FPS may rebuild ~ 1 Hz.

D-P3 — Double-buffer CA generation

D-P3 2026-07-28

Decision: `RuleSet::calcGeneration` writes pure `nextState(cell, aliveNeighbors)` into a scratch buffer, then `memcpy`s back; neighbor counts use raw grid pointers + toroidal wrap.

Why: Correct simultaneous update; faster than per-cell `getCanvasPixel`/in-place virtual writes; sparse dirty AABB for visuals.

Consequences: All active rulesets override `nextState`; stubs use identity.

D-P4 — dirty-rect PBO uploads (R8 path partially superseded)

D-P4 2026-07-28

Decision (original): Present cells as `GL_R8` texture of state bytes plus a 256×1 RGB palette (`evalCell`). Upload dirty rects via PBO ping-pong in `GLTexture::UpdateSubImage`. Drop dual float RGB staging.

Why: Large grids: bandwidth and CPU of RGB float fade dominated.

Consequences (kept): dirty-rect `UpdateTexture`, PBO path, bind-state tracker in `GLDevice`.

Superseded presentation (2026-07-30): live path restored to CPU RGB fade (`targetRgb/displayRgb`) + RGB display texture so cell colors ease rather than snap. R8+palette is historical experiment, not current code truth. Canonical: `docs/architecture-consensus.md`.

D-E1 — Module registration lives in App

D-E1 2026-07-28

Decision: Illumo does not include or construct `CellGameModule`. `App/CellMain.cpp` calls `Init`, `addModule`, then `StartModules`. Debug module is registered from App under `#ifndef NDEBUG`.

Why: Engine must not depend on Game headers; product composition belongs at the application boundary.

Consequences: New products/tests can register different module sets; Engine only knows `IModule`.

D-E2 — InputManager has no Game types

D-E2 2026-07-28

Decision: Remove `CellContext*` and `Game` includes from `InputManager`. Also drop unused `SplashText` extern from the input header.

Why: Services must not depend on `Game`; input is a pure device/action service. `Splash` and rules stay in `Game/Rendering`.

Consequences: `InputManager` header only needs `KeyCode/InputContext/GLFW`.

D-E3 — EntityTable is not the cell path

D-E3 2026-07-28

Decision: Archive `EntityTable.h` and `ModuleObject.h` under `archive/dead-engine/`. Remove `entityTable` from `Scene/IllumoContext`.

Why: Nothing allocated or used an `EntityTable`; the live path is drawables + tokens, not ECS.

Consequences: Reintroduce a general object table only when a real feature needs it; document that cells are not entities.

D-E4 — Scene is a drawable list, not a graph

D-E4 2026-07-28

Decision: `Scene` holds only drawables, window, and `activeCamera`. Remove `root`, `nodeLookup`, no-op `Update`, and unused `RenderableObject`. Archive `SceneObject.h`; `Camera` and `CommandLine` no longer inherit a node graph.

Why: Architecture review (dead graph scaffolding); production never used parent/child transforms for cells or UI.

Consequences: Frame contribution model is explicit and small.

D-E5 — Freeze IllumoContext; validate at Start

D-E5 2026-07-28

Decision: Keep `IllumoContext` as a service bag for the **two shipped modules** only. Document required fields per module. `Start()` logs an error and bails if the bag is incomplete. Do not grow the bag for convenience; a third module should take explicit constructor dependencies if its subset differs.

Why: Architecture review — bag cost is zero at $N = 2$ but becomes a de-facto global API as N grows.

Consequences: `IllumoContextHasGameCore` / `IllumoContextHasDebugCore` helpers; freeze note on the struct.

D-C1 — Canvas dual role is intentional (for now)

D-C1 2026-07-28

Decision: Keep `Canvas` as domain grid + fade view + GPU enroll in one type. Document the scale wall: full-grid `calcGeneration`, dual float RGB buffers (~ 24 B/cell), no chunked simulation domain.

Why: Locality for dirty-rect + palette + fade; headless tests already use injected `MockBackend` rather than pure `LifeGrid`.

Consequences: Split `LifeGrid/CanvasView` only if pure sim tests or large canvases become product requirements.

D-R9 — String-named uniforms are backend debt

D-R9 2026-07-28

Decision: Keep `char name[32]` uniforms for OpenGL + Mock. Treat as debt if a second *real* GPU backend is adopted; prefer binding points / pre-resolved locations then.

Why: Architecture review — uniform path is the least portable part of `RenderCommand`; handles and `UpdateTexture` are closer to neutral.

Consequences: Comment on uniform payloads; no API change now.

D-R10 — Production drawables are pure-token

D-R10 2026-07-28

Decision: `Canvas`, `CommandLine`, `GLString`, `SplashText` use `AppendCommands` only (return true when contributing). Immediate `Draw()` hybrid remains for tests/stubs. `CRTDrawImpl` is legacy for that fallback.

Why: Migration complete for shipped UI/canvas; dual path is debt only where unmigrated types exist.

Consequences: Documented in `Drawable.h` and `Renderer::RenderScene`.

D-F1 — MacroDefs Windows include deferred

D-F1 2026-07-30

Decision: Do **not** split `MacroDefs.h` / `Windows.h` now. Revisit only if include toxicity causes real pain (compile time, macro collisions, portability friction).

Why: Author priority — convenience of `__SLEEP` outweighs hygiene until symptoms appear.

Consequences: Status note in services/platform section; not an open blocker.

Template for new entries

```
\subsection*{D-OXX --- short title}
\begin{decisionbox}[title={D-OXX \quad YYYY-MM-DD}]
\textbf{Decision:} ...
\textbf{Why:} ...
\textbf{Consequences:} ...
\textbf{Supersedes:} D-OYY (optional)
```

\end{decisionbox}

10 Open questions

Use this as a punch list when bouncing ideas. Strike through or move to the decision log when resolved.

Open / needs author input

1. ~~Token payload:~~ flat struct vs variant vs byte stream? **Resolved D-R1:** simple tagged union (C-style).
2. ~~Handle type:~~ keep unsigned long ...? **Resolved D-R3:** unsigned long + registries for v1.
3. ~~Who emits tokens?~~ each drawable vs scene compiler? **Resolved D-R2:** each drawable emits via AppendCommands.
4. **Resource ownership:** refcounts, generational handles, or “destroy only at shutdown” for v1? (*Working answer D-R4: shutdown-only for v1.*)
5. ~~Scene graph leftovers?~~ **Resolved D-E4:** drawable list only; SceneObject archived.
6. ~~IllumoContext growth?~~ **Resolved D-E5:** freeze bag; validate at Start; third module = explicit deps.
7. ~~Canvas domain vs view?~~ **Resolved D-C1:** intentional monolith until scale forces split.
8. ~~String uniforms multi-API?~~ **Resolved D-R9:** debt if second real GPU back-end.
9. ~~Canvas upload:~~ full texture rewrite each frame vs dirty rects? **Resolved D-P1/D-P4:** dirty rects + PBO. Presentation is RGB fade display (R8+palette experiment partially rolled back; fade restored).
10. ~~Illumo ↔ Game dependency:~~ module registration? **Resolved D-E1:** App (CellMain) registers modules after Init; Engine only knows IModule.
11. ~~InputManager → CellContext include?~~ **Resolved D-E2:** InputManager is Game-free.
12. ~~RenderQueue class:~~ delete, rename, or repurpose? **Resolved D-R6:** archived; Scene + Renderer is the path.
13. ~~EntityTable:~~ first-class for cells, or experimental? **Resolved D-E3:** experimental/unused; archived under archive/dead-engine/. Cells are drawables, not entities.
14. **Linux/macOS:** invest now or freeze until token GL path is solid on Windows? (*Working answer D-R4: freeze until Windows token path solid — Windows token path is solid; parity still open.*)
15. **Tracy:** always-on in Debug only — any CI policy?
16. ~~Tests:~~ first meaningful automated test? **Resolved D-R7/D-R8:** MockBackend + CSimTests (unit, E2E, rules, canvas, UI tokens).
17. **Author intent name “Illumo”:** engine codename meaning / permanence?

18. ~~CPU color fade?~~ **Restored:** sparse `displayRgb/targetRgb` fade + RGB dirty-rect upload (still float cost at large grids; D-C1).
19. ~~Wireworld stub?~~ **Implemented:** full rule + console `ruleset WIREWORLD`. Rule 90 / 184 remain stubs. Product UX (head paint, seed) still open — see `docs/architecture-consensus.md` §8.
20. ~~MacroDefs / Windows.h include toxicity?~~ **Deferred D-F1:** fix only when it starts to cause problems.

11 Glossary

Backend

Implementation of `IBackend` for a graphics API (or mock).

Canvas

Cell grid domain (`lifeCanvas`) plus CPU palette targets, `displayRgb` fade, and a token-based RGB display-texture view.

Command / token

One entry in the render command queue describing a GPU operation.

C RTP

Curiously Recurring Template Pattern; used by `Drawable` for optional immediate `DrawImpl`.

Dirty rect

Inclusive AABB of cells/texels that changed; used for sparse visual work and subimage uploads.

Drawable

Scene list entry that emits tokens via `AppendCommands` (preferred) or immediate `Draw` (fallback).

Enrollment

Creating GPU resources and receiving handles outside the tight frame loop.

Illumo

Engine/host object: owns services, modules, frame pumping.

IllumoContext

Frozen non-owning service bag for the two shipped modules (D-E5).

Module

`IModule` subsystem (game, debug, ...).

Palette

CPU table mapping all 256 possible cell-state bytes to RGB target colors.

PBO

Pixel buffer object; async unpack path for texture uploads.

RuleSet

Cellular automaton transition rules (`nextState` + `evalCell`).

Scene

Ordered list of drawables + camera + window for one frame; not a node graph and not an immediate GL executor.

A Build notes

A.1 Configure & build (Windows)

```
cmake -S CSim -B build -G "Visual Studio 17 2022" -A x64
cmake --build build --config Release
```

The default build compiles the application and `CSimTests`, then runs the `CSimTests` CTest entry through the `CSimRunTests` target. Use an explicit target only for a focused build.

```
cmake --build build --config Release --target CSimTests
```

Artifacts:

- `build/Release/CSim.exe`
- `build/Debug/CSim.exe`
- `build/Release/CSimTests.exe` (legacy CMake target `CSimRenderTests` aliases `CSimTests`)

A.2 Tests (headless)

```
ctest --test-dir build -C Release -R "^CSimTests$" --output-on-failure
# or: build/Release/CSimTests.exe
```

No OpenGL context is required (`MockBackend`).

A.3 Known setup issues

- GLEW is pulled via `thirdparty/glew-2.1.0/build/cmake`; that subtree must exist (do not delete vendored CMake helpers).
- Debug may enable `/fsanitize=address`; requires a toolchain that supports MSVC ASan.
- FreeType may warn about missing optional system deps (HarfBuzz, zlib, PNG); build can still succeed with bundled defaults.
- GLSL under `CSim/Shader/` is copied to the build tree at configure time; after adding shaders, reconfigure or copy into `build/Shader/`.

A.4 House style (CONTRIBUTING)

See `CSim/CONTRIBUTING.md`: limited `auto`, avoid namespaces, no recursion, third-party via PR.

B Key file map

Quick index for chats that need to open the right files. Not exhaustive.

Path	Why it matters
App/CellMain.*	App loop + module registration (D-E1)
Engine/Illumo.*	Services host; addModule/StartModules; frame pump
Engine/IllumoContext.h	Service pointer bag
Engine/IModule.h	Module API
Engine/DebugModule.*	Debug overlay module (Debug builds)
Game/CellGameModule.*	Modes, input, sim tick, palette rebuild
Game/CellContext.h	Canvas + ruleset factory
Game/Canvas.*	Grid, CPU palette/fade, dirty RGB-display uploads
Rulesets/RuleSet.*	Double-buffer generation + nextState
Rulesets/*RuleSet.*	Concrete CA rules + evalCell colors
Rendering/Scene.h	Drawable list + camera + window (no scene graph)
Rendering/Drawable.*	Token emitter base (no GL ownership)
Rendering/RenderCommand.h	Tagged-union tokens
Rendering/CommandQueue.*	Token buffer
Rendering/IBackend.h	Backend interface
Rendering/Renderer.h	Enroll + RenderScene + push helpers
Rendering/OpenGL/GLBackend.*	OpenGL backend registries
Rendering/OpenGL/GLDevice.*	Execute queue, bind tracker
Rendering/OpenGL/GLTexture.h	R8/RGB/RGBA + PBO UpdateSubImage
Rendering/Mock/MockBackend.h	Headless IBackend for tests
Rendering/GLString.*	FPS / text tokens + geometry cache
Rendering/SplashText.*	Mode splash (GLString wrapper)
Services/CommandLine.*	Console UI tokens (batched)
Services/InputManager.*	Input contexts/actions
Services/EnvVars.*	Runtime config
Services/Logger.*	Logging
Services/SaveLoad.h	Ported dialogs API
Platform/Windows/*	Win main + file dialogs
Foundation/MathTypes.h	GLM aliases (not Math.h!)
Tests/TestMain.cpp	Headless suite entry
CSim/Shader/canvas_*.glsl	Sample the faded RGB display texture
CSim/CMakeLists.txt	Sources + CSimTests

B.1 Archive

- `archive/old-states/` — previous State pattern experiments.
- `archive/dead-render/` — retired immediate GL / RenderQueue paths.
- `archive/dead-engine/` — EntityTable, ModuleObject, SceneObject (D-E3/D-E4).
- Analyzer/build junk may also live under `archive/`; ignore for design.