



MIRSVM: Multi-instance support vector machine with bag representatives

Gabriella Melki^a, Alberto Cano^{a,*}, Sebastián Ventura^{b,c}

^a Department of Computer Science, Virginia Commonwealth University, USA

^b Department of Computer Science and Numerical Analysis, University of Cordoba, Spain

^c Department of Computer Science, King Abdulaziz University, Saudi Arabia

ARTICLE INFO

Article history:

Received 22 July 2017

Revised 16 January 2018

Accepted 10 February 2018

Available online 13 February 2018

Keywords:

Machine learning

Multiple-instance learning

Support vector machines

Bag-level multi-instance classification

Bag-representative selection

ABSTRACT

Multiple-instance learning (MIL) is a variation of *supervised learning*, where samples are represented by labeled bags, each containing sets of instances. The individual labels of the instances within a bag are unknown, and labels are assigned based on a multi-instance assumption. One of the major complexities associated with this type of learning is the ambiguous relationship between a bag's label and the instances it contains. This paper proposes a novel support vector machine (SVM) multiple-instance formulation and presents an algorithm with a bag-representative selector that trains the SVM based on bag-level information, named MIRSVM. The contribution is able to identify instances that highly impact classification, i.e. bag-representatives, for both positive and negative bags, while finding the optimal class separation hyperplane. Unlike other multi-instance SVM methods, this approach eliminates possible class imbalance issues by allowing both positive and negative bags to have at most one representative, which constitute as the most contributing instances to the model. The experimental study evaluates and compares the performance of this proposal against 11 state-of-the-art multi-instance methods over 15 datasets, and the results are validated through non-parametric statistical analysis. The results indicate that bag-based learners outperform the instance-based and wrapper methods, as well as MIRSVM's overall superior performance against other multi-instance SVM models, having an average accuracy of 82.6%, which is 2.5% better than the best performing state-of-the-art MI classifier.

© 2018 Elsevier Ltd. All rights reserved.

1. Introduction

In traditional classification, learning algorithms attempt to correctly label unknown samples by finding patterns between training samples and their class label. *Multi-instance (MI)* learning is a generalization of *supervised learning* that has been recently been gaining interest because of its applicability to many real-world problems such as webmining and text categorization [1], image classification and retrieval [2,3], human action recognition [4], medical diagnosis and imaging [5], and bioinformatics [6] (drug activity prediction and protein identification). In the case of drug activity prediction, MIL allows molecules to be represented as related instances contained in a bag rather than single instances with their own labels.

The difference between MIL and traditional learning is the nature of the data. In the multi-instance setting, a sample is considered a *bag* that contains multiple *instances* and is associated

with a single label. The individual instance labels within a bag are unknown and bag labels are assigned based on a multi-instance assumption, or hypothesis. Introduced by Dietterich et al. [6], the standard MI assumption states that a bag is labeled positive if and only if it contains at least one positive instance. More recently, other hypotheses and frameworks have been proposed by Foulds and Frank [7] to encompass a wider range of applications with MI data.

One of the major complexities associated with MIL is the ambiguity of the relationship between a bag label and the instances within the bag [8]. This stems from the standard MI assumption, where the underlying distribution among instances within positive bags is unknown [9]. There have been different attempts to overcome this complexity, such as “flattening” the MIL datasets, meaning instances contained in positive bags each adopt a positive label, allowing the use of classical supervised learning techniques [10]. This approach assumes that positive bags contain a significant number of positive instances, which may not be the case, causing the classifier to mislabel negative instances within the bag, decreasing the power of the MI model.

* Corresponding author.

E-mail address: acano@vcu.edu (A. Cano).

To overcome this issue, a different MIL approach was proposed, where subsets of instances are selected from positive bags for classifier training [11,12]. One drawback of this type of method is that the resulting training datasets become imbalanced towards positive instances. Model performance further deteriorates when more instances are selected as subsets than needed [13–15]. Our proposal aims to deal with this drawback by minimizing class imbalance. This is achieved by optimally selecting bag-representatives from both classes using support vector machines.

Support vector machines represent a set of supervised, linear and nonlinear, classification and regression methods that have theoretical foundations on Vapnik–Chervonenkis (VC) theory [16,17]. SVM models are similar to other machine learning techniques, but research has shown that they usually outperform them in terms of computational efficiency, scalability, and robustness against outliers [18,19], making them a useful tool for various real-world applications [20].

To address the limitations presented by MIL algorithms, this paper proposes a novel support vector machine formulation with a bag-representative selector, called Multiple-Instance Representative Support Vector Machine (MIRSVM). SVMs are known to perform well when data is limited, therefore combining them with a novel bag-representative selector aims to remedy class imbalance caused by limited positive bag instances, without making specific assumptions about the bags' internal distributions. The algorithm selects bag-representatives iteratively according to the standard MI assumption, ensuring known information, such as the negative bag labels, are fully utilized during the training process. The optimal separating hyperplane between bags is then found with respect to the bag-representatives using a Gaussian kernel and a quadratic programming solver. The optimal set of representatives is found when they have converged, or stopped changing from one iteration to the next. The algorithm does not assume any distribution of the instances and is not affected by the number of instances within a bag, making it applicable to a variety of contexts. The key contributions of this work include,

- Reformulating the traditional primal L1-SVM problem to optimize over bags, rather than instances, ensuring all the information contained within each bag is utilized during training, while defining bag representative selector criteria.
- Deriving the dual multi-instance SVM problem, with the Karush–Kuhn–Tucker necessary and sufficient conditions for optimality. The dual is maximized with respect to the Lagrange multipliers and provides insightful information about the resulting sparse model. The dual formulation is kernelized with a Gaussian radial basis function, which calculates the distances between bag representatives.
- Devising a unique bag-representative selection method that makes no presumptions about the underlying distributions of the instances within each bag, while maintaining the default MI assumption. This approach eliminates the issue of class imbalance caused by techniques such as flattening or subsetting positive instances from each bag. The key feature of MIRSVM is its ability to identify instances (support vectors) within positive and negative bags that highly impact the model.

This work is organized as follows. Section 2 presents the notation used throughout the paper, formalizes the MIL problem, and reviews recent MIL methods, traditional support vector machines, and state-of-the-art multi-instance SVM methods. Section 3 presents the contribution: the primal L1-SVM formulation with respect to optimizing over bags, its derived dual formulation along with conditions for optimality, and the proposed algorithm, MIRSVM. Section 4 presents the experimental environment, including results from various metrics, run-time, and non-parametric statistical analysis over 15 benchmark MI

datasets compared with 11 state-of-the-art algorithms. Finally, Section 5 presents the conclusions of this contribution.

2. Background

This section defines the notation that will be used throughout the paper, and reviews related works on multi-instance learning, traditional SVMs, and multi-instance support vector machines.

2.1. Notation

Let \mathcal{D} be a training dataset of n bags. Let $\mathbf{Y} \in \mathcal{D}$ be a vector of n labels corresponding to each bag, having a domain of $\mathbf{Y} \in \{-1, 1\}^n$. Let $\mathbf{X} \in \mathcal{D}$ be a matrix consisting of d input variables and m instances, having a domain of $\mathbf{X} \in \mathbb{R}^{m \times d}$. Let \mathcal{B} be the set of bags which contain a number of instances, sometimes of different size and usually non-overlapping, such as $\mathcal{B}_I = \{\mathbf{x}_1, \dots, \mathbf{x}_{|\mathcal{B}_I|}\}$ for index set $I \subseteq \{1, \dots, n\}$, where $|\mathcal{B}_I|$ is the number of instances in bag I . Table 1 provides a summary of the notation used in this paper.

2.2. Multiple-instance learning

In traditional binary classification problems, the goal is to learn a model that maps input samples to labels, $f: \mathbb{R}^{m \times d} \rightarrow \mathbf{Y}^m \in \{-1, +1\}$. In the MIL case, samples are called *bags* and each bag contains one or more input instances and is assigned a single bag-level label. Input instances, $\{\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_m\}$, are grouped into bags with unique identifiers, $\mathcal{B} = \{\mathcal{B}_1, \mathcal{B}_2, \dots, \mathcal{B}_n \mid \mathcal{B}_I = \{\mathbf{x}_i \mid \forall i \in I\}, \forall I \in \{1, \dots, n\}\}$ and assigned a label, Y_I . An example MI dataset representation is shown in Fig. 1. Using the training dataset $\mathcal{D} = \{(\mathcal{B}_1, Y_1), \dots, (\mathcal{B}_n, Y_n)\}$, the goal is to train a classifier that predicts the label of an unseen bag, $f(\mathcal{B}_{n+1}) \rightarrow Y_{n+1}$. In order to build a classifier without any knowledge of the individual training instance labels, Dietterich et al. [6] proposed the *standard MI* (SMI) hypothesis based on the drug-activity prediction domain, shown in Eq. (1), which states that a bag is labeled positive if and only if at least one of the instances in the bag is positive, and is labeled negative otherwise.

$$Y_I = \begin{cases} +1 & \text{if } \exists y_i = +1, \forall i \in I \\ -1 & \text{otherwise.} \end{cases} \quad (1)$$

Table 1
Summary of notation used throughout the paper.

Definition	Notation
Number of Bags	n
Number of Instances	m
Number of Input Attributes	d
Set of Bags	$\mathcal{B} = \{\mathcal{B}_1, \dots, \mathcal{B}_n\}$
Bag Index Set	$I \in \mathbb{Z}_+^n$
Input Space	$\mathbf{X} \in \mathbb{R}^{m \times d}$
Bag Labels	$\mathbf{Y} \in \{-1, 1\}^n$
Input Instance i from Bag I	$\mathbf{x}_i = (x_1, \dots, x_d), i \in I$
Unknown Individual Instance Label i	$y_i \in \{-1, 1\}$
Bag I	$\mathcal{B}_I = \{\mathbf{x}_i \mid \forall i \in I\}$
Full Multi-Instance Training Dataset	$\mathcal{D} = \{(\mathcal{B}_1, Y_1), \dots, (\mathcal{B}_n, Y_n)\}$

This implies that individual instance labels y_i exist, but are not known (for positive bags) during training. Eq. (1) can also be rewritten as $Y_I = \arg\max_{y_i \in I} y_i$, for simplicity.

In addition to the SMI assumption, alternative MI assumptions have been proposed to date [7]. A recent review describing the taxonomy of multi-instance classification was presented by Amores [21]. Classifiers that fall under the *instance-space paradigm* aim to separate instances in positive bags from those in negative ones. Bag-level classifiers (*bag-space paradigm*) treat each bag as a whole

entity, implicitly extracting information from each bag in order to accurately predict their labels [22]. Methods that fall under the *embedded-space paradigm* map the input bags to a single feature vector that explicitly encapsulates all the relevant information contained within each bag.

Instance-based methods under the SMI assumption attempt to identify desirable instance properties that make a bag positive. One traditional method is the Axis-Parallel Rectangle (APR) [6], which assigns a positive label to an instance if it belongs to an APR. The Diverse Density (DD) [11] measure is maximized for instances that are near at least one instance in a positive bag and far from all instances in negative bags. Auer and Ortner [23] present a boosting approach that uses balls centered around positive bags, called Multi-Instance Optimal Ball (MIOptimalBall). A major challenge of these methods is that the distributions of positive and negative bags affect their performance [24,25]. Alternatively, Fu et al. [26] models the distribution of negative bags with Gaussian kernels, which can prove difficult when the quantity of data is limited.

Some methods in literature [10,27], such as Simple-MI [28], transform the MI dataset to a traditional instance-level dataset. This approach was evaluated by Bunescu and Mooney [29] and they proposed mapping each bag to a max-min vector. The disadvantage of these approaches is that they assume the labels of all instances within positive bags are positive, when this may not be the case.

An extension of traditional single-instance k -nearest neighbors method (KNN) was proposed by Wang and Zucker [30] to be applied to the bag-level, named CitationKNN. This method uses a distance function between bags in order to determine bag similarities and a voting scheme to determine the bag class labels. Xu and Shih [31] proposed a multi-instance Decision-Based Neural Network (MI-DBNN), which is a neural network with a modular structure [5].

\mathcal{B}	x_1	x_2	x_3	\dots	x_d	Y
\mathcal{B}_1	0.1	0.8	2.5	\dots	0.8	POS
	0.2	2.0	5.5	\dots	3.0	
	0.1	0.1	4.5	\dots	0.1	
\mathcal{B}_2	1.5	4.0	0.8	\dots	0.1	NEG
	0.8	0.4	2.9	\dots	1.1	
	2.3	0.2	4.0	\dots	5.5	
	6.7	5.0	0.1	\dots	0.5	
	0.1	4.0	8.7	\dots	3.3	

Fig. 1. Example multi-instance data representation. The figure shows a sample binary MI dataset with 2 bags of different sizes and labels, \mathcal{B}_1 and \mathcal{B}_2 . The instances are d -dimensional.

Blockeel et al. [32] introduced the Multi-Instance Tree Inducer (MITI), which uses decision trees as a heuristic to solve the MI problem. MITI aims to identify whether an instance within a bag is truly positive and eliminate false positives within the same bag. The disadvantage of this approach stems from removing instances considered as false positives from partially grown trees without updating the existing tree structure. Bjerring and Frank [33] then enhanced this approach by creating the method Multi-Instance Rule Induction (MIRI), which eliminates any possibility of a sub-optimal split because the tree is discarded and regrown. Other popular methods include MIBOost [34], MIWrapper [35], and Two-Level Classifier (TLC) [36].

For most of the methods described above, implicit or explicit assumptions have been made about the distribution of the data

[37]. Selecting a method that is robust for a problem such as MIL can be difficult when little is known about the nature of the data, especially considering the unknown distribution of the instances within bags [38,39]. Our proposed contribution, MIRSVM, is an iterative method that uses SVMs to design a MIL model without making prior assumptions about the data. Classifiers of this type are known to provide better generalization capabilities, performance, and sparser models.

2.3. Support vector machines

Most classical learning techniques require knowledge of the data distribution to build accurate models, which is a serious restriction because, in most cases, the distribution is unknown [40]. SVMs represent learning techniques that have been introduced under the *structural risk minimization* (SRM) framework and VC theory. Rather than optimizing over L1 or L2 norms and classification error, SVMs perform SRM [41], minimizing the expected probability of classification error, resulting in a generalized model without making assumptions about the data distribution [42].

SVMs are a particularly useful for learning linear predictors in high dimensional feature spaces, which is a computationally complex problem [43]. In the context of classification, this problem is approached by searching for the optimal *maximal margin* of separability between classes [44,45]. Since most real-world datasets are non-linearly separable, Cortes and Vapnik [42] introduced the *Soft-Margin L1-SVM*. However, if the training dataset is not linearly separable, the classifier may not have a good generalization capability [46]. Generalization and linear separability can be enhanced by mapping the original input space to a higher dimensional dot-product space by using a kernel function shown in Eq. (2):

$$\mathcal{K}(\mathbf{x}_i, \mathbf{x}_j) = \langle \phi(\mathbf{x}_i), \phi(\mathbf{x}_j) \rangle, \quad (2)$$

where $\phi(\cdot)$ represents a function mapping from the original feature space to a higher dimensional space. This kernel mapping is helpful when solving the dual SVM problem shown in Eq. (3).

$$\max_{\alpha} \quad \frac{1}{2} \sum_{i,j=1}^m \alpha_i \alpha_j y_i y_j \mathcal{K}(\mathbf{x}_i, \mathbf{x}_j) - \sum_{i=1}^m \alpha_i \quad (3)$$

$$\text{s.t.} \quad \sum_{i=1}^m \alpha_i y_i = 0, \quad (3a)$$

$$0 \leq \alpha_i \leq \frac{C}{m}, \quad \forall i \in \{1, \dots, m\}, \quad (3b)$$

where $C \in \mathbb{R}$ is the penalty parameter that controls the trade-off between margin maximization and classification error minimization.

A traditional and widely used method of solving the L1-SVM problem is the *Sequential Minimal Optimization* (SMO) technique proposed by Platt [47]. It is an iterative procedure that divides the SVM dual problem into a series of sub-problems, which are then solved analytically by finding the optimal α values that satisfy the Karush–Kuhn–Tucker (KKT) conditions [48]. Although SMO is guaranteed to converge, heuristics are used to choose α values in order to accelerate the convergence rate. This is a critical step because the convergence speed of the SMO algorithm is highly dependent on the dataset size, as well as the SVM hyperparameters [17]. *Iterative Single Data Algorithm* (ISDA) [16,18] is a more recent and efficient approach for solving the L2-SVM problem, shown to be faster than the SMO algorithm and equal in terms of accuracy [49,50]. It iteratively updates the objective function by working on one data point at a time, using coordinate descent to find the optimal objective function value. Other methods for solving the SVM problem include *Quadratic Programming* solvers. These types of algorithms find the true optimal objective function value at the trade-off of having a relatively slower run-time.

2.4. Multiple-instance support vector machines

The MI adaptation of the SVM presents two contexts for solving the problem: the instance-level and the bag-level. The first tries to identify instances, either all within a bag or just key instances, that help find the optimal separating hyperplane between positive and negative bags. The latter uses kernels defined over whole bags to optimize the margin.

Andrews et al. [1] proposed a mixed-integer quadratic program that solves the MI problem at an instance-level, using a support vector machine, named MISVM, that can be solved heuristically. Rather than maximizing the margin of separability between instances of different classes, this instance-based method maximizes the margin between bags. It tries to identify the key instance from each positive bag that makes the bag positive by assuming it has the highest margin value [5]. Using bag-representatives from the positive class and all instances from the other is an example of an approach that combines rules from the SMI assumption and the collective assumption. Wang and Kwong [51] proposed a multi-criteria decision making system that measures the significance of unlabeled instances and selects the best instance iteratively using MISVM. A disadvantage of this approach stems from the assumption that all instances within positive bags are also positive, which is an implicit step in the initialization of MISVM. Andrews et al. [1] also proposed a second mixed-integer instance-level approach, named mi-SVM, which tries to identify the instances within positive bags that are negative and utilize them in the construction of the negative margin. The main disadvantage of these approaches is that they create an imbalanced class problem that favors the negative class, resulting in a biased classifier.

Yang et al. [52] presented an instance-based SVM that uses an asymmetric loss function in which positive and negative misclassification costs are different, ensuring all negative instances are correctly classified while minimizing false positives. A false negative instance in a positive bag might not cause an error on the bag label, but a false positive instance within a negative bag would lead to a misclassification error.

One of the first bag-level approaches to the multi-instance SVM problem was proposed by Gärtner et al. [53], who defined a bag-level kernel, which determines the similarity between two bags in a higher dimensional space. Blaschko and Hofmann [54] propose conformal kernels which manipulate each attribute's dimension based on its importance.

Zhou et al. [55] proposed miGraph, which implicitly constructs a graph by deriving affinity matrices while using a graph kernel. It assumes the instances are not independently and identically distributed because of the nature of MI data. Bags imply relationships among the instances within it, and miGraph was designed to exploit them.

3. Multiple-instance representative SVM

MIRSVM is based on the idea of selecting representative instances from both positive and negative bags which are used to find an unbiased, optimal separating hyperplane. A representative is iteratively chosen from each bag, and a new hyperplane is formed according to the representatives until they converge. Based on the SMI hypothesis, only one instance in a bag is required to be positive for the bag to adopt a positive label. Due to the unknown distribution of instances within positive bags, MIRSVM is designed to give preference to negative bags during training, because their distribution is known, i.e. all instances are guaranteed to be negative. This is evident during the representative selection process, by taking the index of the maximum output value within each bag based on the current hyperplane using the following rule:

$$s_I = \operatorname{argmax}_{i \in I} (\langle \mathbf{w}, \mathbf{x}_i \rangle + b), \forall I \in \{1, \dots, n\}, \quad (4)$$

where $\mathbf{w} \in \mathbb{R}^d$ is a d -dimensional weight vector, $b \in \mathbb{R}$ is a bias term. In other words, the most positive instance is chosen from each positive bag and the least negative instance is chosen from each negative bag (instances with the largest output value based on the current hyperplane), pushing the decision boundary towards the positive bags. Eq. (5) presents the primal MIRSVM optimization problem:

$$\min_{\mathbf{w}, b, \xi} \frac{1}{2} \|\mathbf{w}\|^2 + \frac{C}{n} \sum_I \xi_I, \quad (5)$$

$$\text{s.t. } Y_I (\langle \mathbf{w}, \mathbf{x}_{s_I} \rangle + b) \geq 1 - \xi_I, \forall I \in \{1, \dots, n\} \quad (5a)$$

$$\xi_I \geq 0, \forall I \in \{1, \dots, n\}, \quad (5b)$$

where S_I is a set of the bag representatives' indices, \mathbf{x}_{s_I} is the instance representative of bag B_I , and the slack variable $\xi \in \mathbb{R}^m$ allows for optimizing over bag errors. Note the variables in MIRSVMs formulation are the similar to those of the traditional SVM, except they are now representing each bag as an instance. This is one of the benefits of the MIRSVM formulation, whereby using a bag-representative selector, traditional SVM solvers can be used for new data representations such the multi-instance data.

Solving the optimization problem given in Eq. (5) using a quadratic programming solver is a computationally expensive task due to the number of constraints, which scales by the number of bags n , as well as the calculation of the inner product between two d -dimensional vectors in constraint (5a). The proposed solution for these problems was deriving and solving the dual of the optimization problem given by Eq. (5).

The dual can be formed by taking the Lagrangian of (5), $\mathcal{L}(\mathbf{w}, b, \xi, \alpha, \beta)$, and substituting the optimality conditions (from $\nabla_{\mathbf{w}, b, \xi} \mathcal{L}(\mathbf{w}, b, \xi, \alpha, \beta) = 0$), where α and β are the non-negative Lagrange multipliers. The dual MIRSVM formulation becomes the following:

$$\max_{\alpha, \beta} \sum_I \alpha_I - \frac{1}{2} \sum_I \sum_{K \in I} \sum_{j=1}^d \alpha_I \alpha_K Y_I Y_K X_{s_I j} X_{s_K j} \quad (6)$$

$$\text{s.t. } \sum_I \alpha_I Y_I = 0 \quad (6a)$$

$$\alpha_I + \beta_I = \frac{C}{n}, \forall I \in \{1, \dots, n\} \quad (6b)$$

$$\alpha_I \geq 0, \forall I \in \{1, \dots, n\} \quad (6c)$$

$$\beta_I \geq 0, \forall I \in \{1, \dots, n\}, \quad (6d)$$

where s_I is computed for each bag, as shown in Eq. (7):

$$s_I = \operatorname{argmax}_{i \in I} \left(\sum_{K \in I} \sum_{j=1}^d \alpha_K Y_K X_{s_K j} X_{ij} + b \right), \forall I \in \{1, \dots, n\}. \quad (7)$$

The implicit constraints (6b) through (6d) imply three possible cases for the α_I values:

1. If $\alpha_I = 0$, then $\beta_I = C/n$ and $\xi_I = 0$, implying the instance is correctly classified and outside the margin.
2. If $0 < \alpha_I < C/n$, then $\beta_I > 0$ and $\xi_I = 0$, indicating that the instance sits on the margin boundary, i.e. is an *unbounded support vector*.
3. If $\alpha_I = C/n$, then $\beta_I = 0$ and there is no restriction for $\xi_I \geq 0$. This also indicates that the instance is a support vector, but one that is *bounded*. If $0 \leq \xi_I < 1$, then the instance is correctly classified, and is misclassified otherwise.

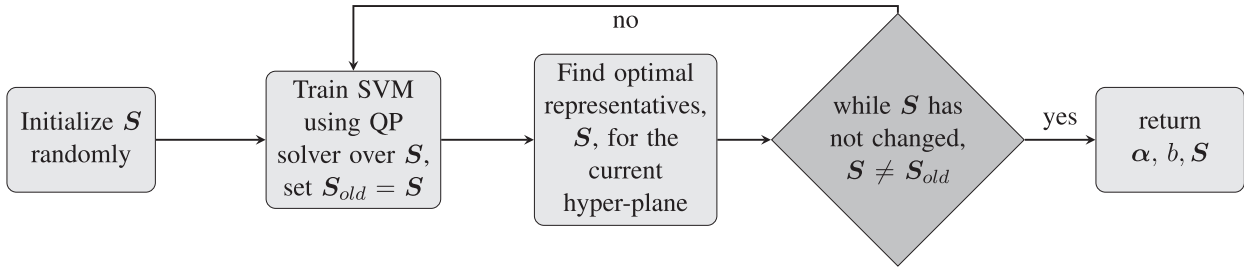


Fig. 2. This figure represents a summary of the steps performed by MIRSVMS. The representatives are first randomly initialized, then continuously updated according to the current hyper-plane, which is found using a quadratic programming (QP) solver. Upon completion, the model is returned along with the optimal bag-representatives.

We then kernelize the dual by replacing the inner product of the samples in feature space with their corresponding kernel values, $\mathcal{K}(\mathbf{x}_i, \mathbf{x}_j)$. One of the biggest advantages of the dual SVM formulation is the sparseness of the resulting model, because support vectors, instances that have their corresponding $\alpha_i \neq 0$, are only considered when forming the decision boundary. MIRSVMS uses a Gaussian RBF kernel, given by Eq. (8), where σ is the Gaussian shape parameter Fig. 2.

$$\mathcal{K}(\mathbf{x}_i, \mathbf{x}_j) = e^{-\frac{\|\mathbf{x}_i - \mathbf{x}_j\|^2}{2\sigma^2}} \quad (8)$$

To evaluate the output vector, \mathbf{o}_l , of bag l using the kernel, the following equation is used [16], where B_l are the instances of bag l , \mathbf{X}_S are the optimal bag representatives, and \mathbf{Y}_S are the representative bag labels.

$$\mathbf{o}_l = \mathcal{K}(B_l, \mathbf{X}_S) * (\boldsymbol{\alpha} \cdot \mathbf{Y}_S) + b \quad (9)$$

The bias term b is calculated as shown in Eq. (10), where \mathbf{sv} is the vector of support vector indices and n_{sv} is the number of support vectors [16].

$$b = \frac{1}{n_{sv}} \sum_{sv} Y_{sv} - \mathcal{K}(\mathbf{X}_{sv}, \mathbf{X}_{sv}) * (\boldsymbol{\alpha}_{sv} \cdot \mathbf{Y}_{sv}) \quad (10)$$

Algorithm 1 shows the procedure for training the multi-instance representative SVM classifier and obtaining the

Algorithm 1 Multi-instance representative SVM (MIRSVMS).

Input: Training dataset \mathcal{D} , SVM Parameters C and σ

Output: SVM model parameters $\boldsymbol{\alpha}$ and b , Bag Representative IDs \mathbf{S}

```

1:  $\mathbf{S}_{old} \leftarrow -\infty$ 
2: for  $l \in \{1, \dots, n\}$  do
3:    $\mathbf{S}_l \leftarrow \text{rand}(|B_l|, 1, 1)$   $\triangleright$  Assign each bag a random instance
4: end for
5:  $\mathbf{X}_S \leftarrow \mathbf{X}(\mathbf{S})$ ,  $\mathbf{Y}_S \leftarrow \mathbf{Y}(\mathbf{S})$   $\triangleright$  Initialize the representative dataset
6: while  $\mathbf{S} \neq \mathbf{S}_{old}$  do
7:    $\mathbf{S}_{old} \leftarrow \mathbf{S}$ 
8:    $\mathbf{G} \leftarrow (\mathbf{Y}_S \times \mathbf{Y}_S) \cdot \mathcal{K}(\mathbf{X}_S, \mathbf{X}_S, \sigma)$   $\triangleright$  Build Gram matrix
9:    $\boldsymbol{\alpha} \leftarrow \text{quadprog}(\mathbf{G}, -\mathbf{1}^n, \mathbf{Y}_S, \mathbf{0}^n, \mathbf{0}^n, C^n)$   $\triangleright$  Solve QP Problem
10:   $\mathbf{sv} \leftarrow \text{find}(0 < \boldsymbol{\alpha} \leq C)$   $\triangleright$  Get the support vector indices
11:   $n_{sv} \leftarrow \text{count}(0 < \boldsymbol{\alpha} \leq C)$   $\triangleright$  Get the number of support vectors
12:   $b \leftarrow \frac{1}{n_{sv}} \sum_{i=1}^{n_{sv}} (\mathbf{Y}_{sv} - \mathbf{G}_{sv} * (\boldsymbol{\alpha}_{sv} \cdot \mathbf{Y}_{sv}))$   $\triangleright$  Calculate the bias term
13:  for  $l \in \{1, \dots, n\}$  do
14:     $\mathbf{G}_l \leftarrow (\mathbf{Y}_l \times \mathbf{Y}_S) \cdot \mathcal{K}(B_l, \mathbf{X}_S, \sigma)$ 
15:     $\mathbf{S}_l \leftarrow \text{argmax}_{i \in l} (\mathbf{G}_l * \boldsymbol{\alpha} + b)$   $\triangleright$  Select optimal bag-representatives
16:  end for
17:   $\mathbf{X}_S \leftarrow \mathbf{X}(\mathbf{S})$ ,  $\mathbf{Y}_S \leftarrow \mathbf{Y}(\mathbf{S})$   $\triangleright$  Re-set the representative dataset
18: end while
  
```

optimal representatives from each bag. During training, the representatives, \mathbf{S} , are first initialized by randomly selecting an instance from each bag. A hyper-plane is then obtained using the representative instances, and new optimal representatives are found with respect to the current hyper-plane, by using the rule given in Eq. (7). At each step, the previous values in \mathbf{S} are stored in \mathbf{S}_{old} . The training procedure ends when the bag representatives stop changing from one iteration to the next ($\mathbf{S} = \mathbf{S}_{old}$). Examples of the convergence of bag-representatives are shown in Fig. 3. During the testing procedure, each bag produces an output vector based on the hyper-plane found in the training procedure. The bag label is then assigned by taking the sign of the output vector's maximum value, following the SMI assumption.

The MIRSVMS formulation and representative selector are designed to utilize and select representatives from positive and negative bags, unlike MISVM, which only optimizes over representatives from positive bags, while flattening the negative bag instances. MISVM allows multiple representatives to be chosen from negative bags and limits the number of positive bag-representatives to be one, while MIRSVMS allows for balanced bag-representative selection, where bags of each class are allowed a representative. MISVM also uses a wrapper method to initialize the positive bag-representatives by taking the mean vector of the instances within each positive bag. This is an implicit assumption that the instances within the positive bags are all positive, whereas MIRSVMS's initialization procedure selects an instance from all bags at random, ensuring no noise is added by any wrapper techniques during initialization and no assumptions are made about the instances. Due to the constraints on the representatives, MIRSVMS produces sparser models while MISVM has the freedom to select as many negative support vectors as it needs and restricts the support vectors chosen from positive bags to be one. Fig. 4 shows the decision boundaries produced by MIRSVMS and MISVM to highlight the differences in their solutions. As Fig. 4 shows, MISVM produces a larger number of support vectors from the negative bags, which greatly influences the final decision boundary in favor of the negative class.

4. Experiments

This section presents the experimental setup and comparison of our contribution, as well as eleven other state-of-the-art methods on 15 different benchmark datasets. First, the experimental setup is described and the state-of-the-art methods are listed. The results for each metric, as well as the statistical analysis [56], are then presented and analyzed. Finally, the run-time and meta-ranks of each algorithm are shown, and the overall performance of the algorithms across each metric is discussed. The main aim of the experiments is to compare our contribution to other multi-instance support vector machines, state-of-the-art multi-instance learners, and ensemble methods.

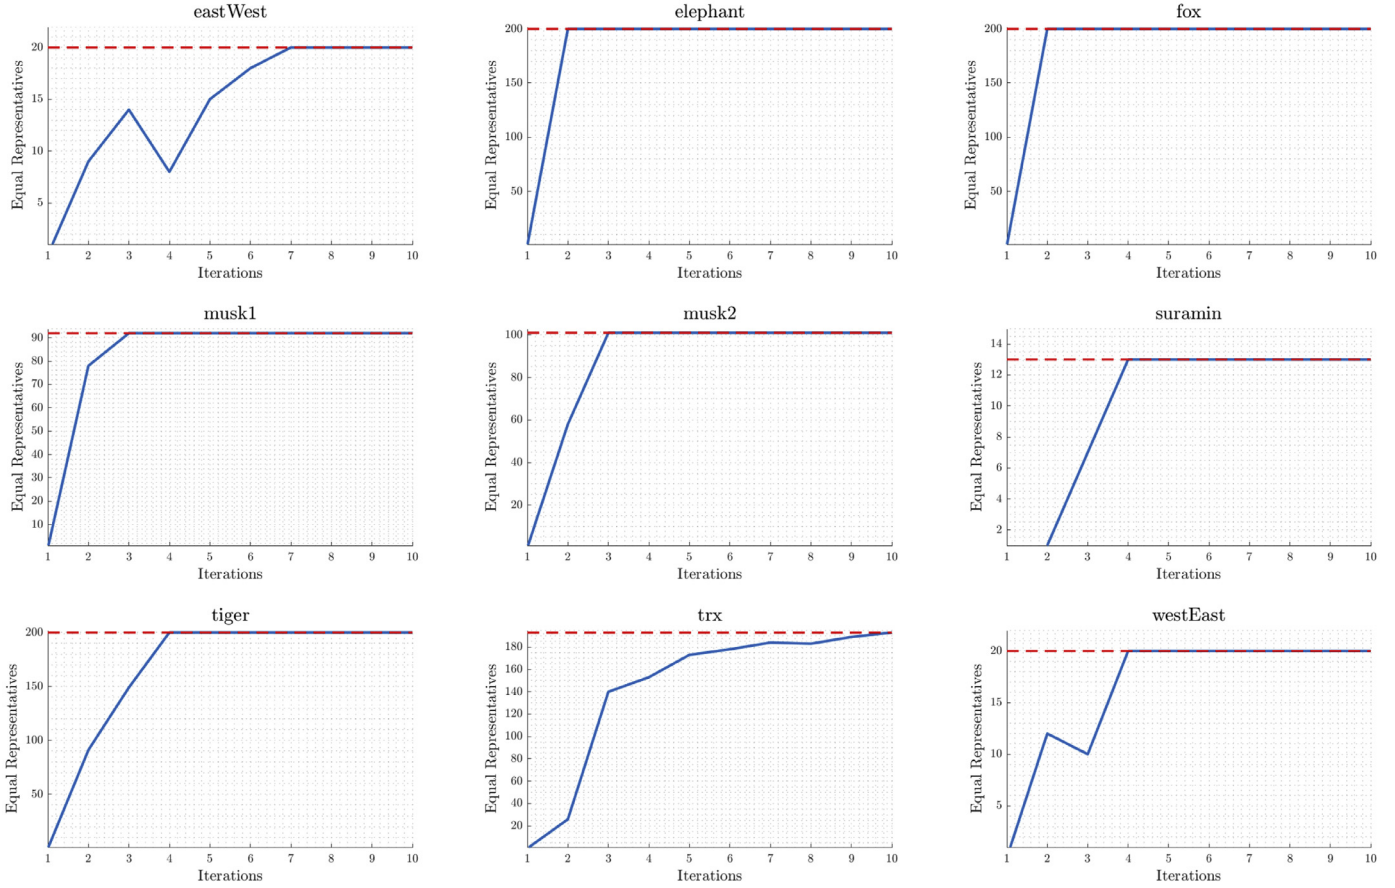


Fig. 3. Bag representative convergence plots on 9 datasets. The blue line shows the number of bag representatives that are equal from one iteration to the next. The red dashed line represents the total number of bags.

Table 2
Datasets used for the experiments in 4.2.

Dataset	Attributes	Positive Bags	Negative Bags	Total	Instances	Average Bag Size
Suramin	20	7	6	13	2898	222.92
EastWest	24	10	10	20	213	10.65
WestEast	24	10	10	20	213	10.65
Musk1	166	47	45	92	476	5.17
Musk2	166	39	62	101	6728	66.61
Webmining	5863	21	92	113	3423	30.29
Mutagenesis-atoms	10	125	63	188	1618	8.61
Mutagenesis-bonds	16	125	63	188	4081	21.71
Mutagenesis-chains	24	125	63	188	5424	28.85
TRX	8	25	168	193	26611	137.88
Elephant	230	100	100	200	1391	6.96
Fox	230	100	100	200	1320	6.60
Tiger	230	100	100	200	1188	5.94
Component	200	423	2707	3130	36894	11.79
Function	200	443	4799	5242	55536	10.59

4.1. Experimental Setup

Table 2 presents a summary of the 15 datasets used throughout the experiments, where the number of attributes, bags, and total number of instances are shown. The datasets were obtained from the Weka¹ [34] and KEEL² [57] dataset repositories.

The experimental environment was designed to test the difference in performance of the proposed method against 11 state-of-the-art algorithms, contrasting instance-level, bag-level, and en-

semble methods. Instance-level methods include MIOptimalBall, MIBoost, MISVM, MIDD, and MIWrapper. Bag-level methods include MISMO, SimpleMI, miGraph, and TLC. The ensemble-based bag-space methods, Bagging and Stacking, were also used. The base algorithms selected for the ensembles Bagging and Stacking were TLC, and TLC and SimpleMI, respectively. These algorithms were chosen because they have shown considerable performance in learning multi-instance models, while also having their frameworks readily available for reproducing their results through MILK, the Multi-Instance Learning Kit³ [58], used in conjunction with the

¹ <http://www.cs.waikato.ac.nz/ml/weka>.

² <http://sci2s.ugr.es/keel/datasets.php>.

³ <http://www.cs.waikato.ac.nz/ml/milk>.

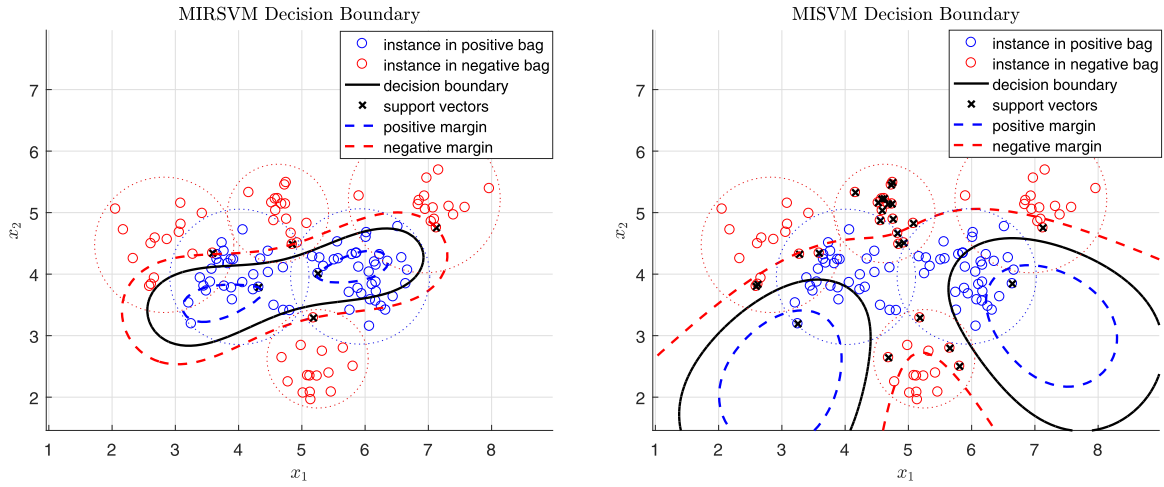


Fig. 4. Difference between MIRSV and MISVM on a random 2-dimensional toy dataset. The instances of this dataset were drawn from the standard normal distribution, with 6 bags, 4 of which are negative (red) and 2 of which are positive (blue), indicated by the red and blue dotted circles. There are a total of 125 instances, 65 belonging to the positive bags and 60 belonging to the negative bags. The decision boundaries (black lines) are shown for each of the algorithms, along with the SVM margin (red and blue dashed lines) and support vectors (black crosses). In this example, both MIRSV and MISVM were trained using $C = 1000$ and $\sigma = 1.5$. Note the differing number of support vectors produced by the two methods. MIRSV has 6, one for each bag, and MISVM has 29. Also note the smoother representation of the data distribution given by MIRSV's decision boundary, unlike MISVM whose decision boundary was greatly affected by the larger number of support vectors belonging to the negative class with respect to the only 2 positive support vectors (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.).

Weka framework. Experiments were run on an Intel i7-6700k CPU with 32GB RAM. MIRSV was implemented in MATLAB while the referenced algorithms are available in the Java implementation of Weka with the exception of miGraph which was made available by Zhou et al.⁴ and tested in MATLAB.

Experiments were performed using 10-fold cross validation in order to objectively evaluate the models' performances and tune hyper-parameters. The data is separated fairly into 10 equally sized sections where, at every iteration of the cross-validation loop, a section is held out as the test set, while the remainder of the data is used for training. These sets are stored and used by each algorithm, ensuring the cross-validation folds are controlled for each algorithm. This procedure ensures the model is not optimistically biased towards the full dataset and the algorithms are evaluated fairly over the same data in each fold. The tuning of the model during cross-validation includes finding the best penalty parameter, C , as well as the best shape parameter for the Gaussian radial basis function kernel, σ . The best hyper-parameters were chosen from the following 6×6 possible combination runs, shown in Eq. (11a) and (11b), referred to as (11).

$$C \in \{0.1, 1, 10, 100, 1000, 10000\} \quad (11a)$$

$$\sigma \in \{0.1, 0.5, 1, 2, 5, 10\} \quad (11b)$$

These parameters were also used for the state-of-the-art SVM methods. This was done in order to keep the experimental environment controlled and ensure fair evaluation of the multi-instance SVM algorithms. The parameters for the referenced algorithms used throughout the experiments were those specified by their authors.

4.2. Results & statistical analysis

The classification performance was measured using five metrics: Accuracy (12a), Precision (12b), Recall (12c), Cohen's kappa rate (12d), and Area under ROC curve (AUC) (12e). The Precision and Recall measures were reported because Accuracy alone can

be misleading when classes are imbalanced, as is the case with the *component* and *function* datasets, which respectively have six and ten times as many negative bags than positive. Cohen's Kappa Rate and the AUC measures are used as complementary measures in order to evaluate the algorithms comprehensively [59]. Cohen's kappa rate, shown in Eq. (12d), evaluates classifier merit according to the class distribution and ranges between -1 (full disagreement), 0 (random classification), and 1 (full agreement). The AUC metric highlights the trade-off between the true positive rate, or recall, and the false positive rate, as shown in Eq. (12e). The values of the true positive (TP), true negative (TN), false positive (FP), and false negative samples (FN) were first collected for each of the classifiers, then the metrics were computed using the equations shown in (12) on the n' bags of the test data, where $n' = TP + FP + TN + FN$. The run times (training and testing times) of each algorithm are also reported to analyze the scalability and speed of each of the algorithms across differently sized datasets.

The results for the following are shown in Tables 3, 5, 7, 9, 11, and 13.

$$\text{Accuracy} = \frac{TP + TN}{n'} \quad (12a)$$

$$\text{Precision} = \frac{TP}{TP + FP} \quad (12b)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (12c)$$

$$\text{Cohen's Kappa Rate} = \frac{n' - \frac{(TP+FN) \cdot (TP+FP)}{n'}}{1 - \frac{(TP+FN) \cdot (TP+FP)}{n'}} \quad (12d)$$


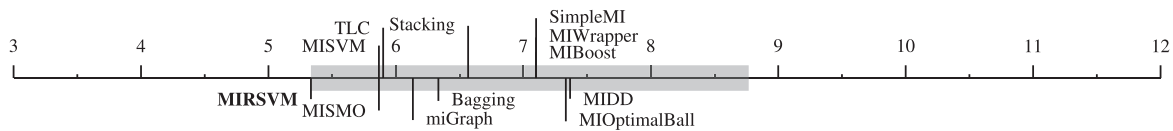
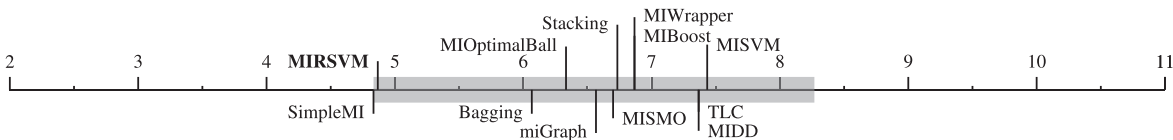


$$\text{Area Under ROC Curve} = \frac{1 + \frac{TP}{TP+FN} - \frac{FP}{FP+TN}}{2} \quad (12e)$$

In order to analyze the performances of the multiple models, non-parametric statistical tests are used to validate the experimental results obtained [60,61]. The Iman-Davenport non-parametric test is run to investigate whether significant differences exist among the performance of the algorithms [62] by ranking them over the datasets used, using the Friedman test. The algorithm ranks for each metric in Eq.(12) are presented in the last row of

⁴ http://lamda.nju.edu.cn/code_miGraph.ashx.

Table 3
Accuracy.

Datasets	MIRSVM	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	0.8000	0.8462	0.5000	0.7250	0.4250	0.5000	0.7250	0.5000	0.5000	0.6000	0.6650	0.4615
eastWest	0.8000	0.7000	0.5000	0.7250	0.6125	0.5000	0.7125	0.5625	0.5000	0.6000	0.6000	0.4500
westEast	0.7500	0.7500	0.5000	0.3750	0.4500	0.5000	0.7375	0.4125	0.5000	0.5625	0.9649	0.6375
musk1	0.9022	0.8152	0.5109	0.7717	0.8804	0.5109	0.7826	0.7609	0.5109	0.8587	0.8142	0.8587
musk2	0.8218	0.7426	0.6139	0.7723	0.7228	0.6139	0.7030	0.7129	0.6139	0.6238	0.8756	0.6733
webmining	0.8500	0.8142	0.8142	0.7699	0.8142	0.8142	0.8407	0.6903	0.8142	0.8142	0.9358	0.8053
trx	0.8860	0.8964	0.8705	0.9016	0.8808	0.8705	0.8705	0.8705	0.8705	0.8756	0.6450	0.8860
mutagenesis-atoms	0.7714	0.7606	0.6649	0.6436	0.7074	0.6649	0.6915	0.6649	0.6649	0.7766	0.7766	0.7606
mutagenesis-bonds	0.8252	0.7872	0.6649	0.6915	0.7713	0.6649	0.7979	0.6649	0.6649	0.8351	0.8351	0.8564
mutagenesis-chains	0.8411	0.7926	0.6649	0.6702	0.7766	0.6649	0.8351	0.6649	0.6649	0.8404	0.8404	0.8351
tiger	0.7750	0.7950	0.5000	0.5000	0.7100	0.5000	0.7200	0.7550	0.5000	0.6650	0.8000	0.7250
elephant	0.8300	0.8300	0.5000	0.5000	0.7900	0.5000	0.8100	0.8000	0.5000	0.8000	0.5625	0.8250
fox	0.6550	0.6300	0.5000	0.5000	0.5800	0.5000	0.5250	0.4750	0.5000	0.6450	0.8587	0.6500
component	0.9366	0.9153	0.8649	0.8696	0.8780	0.8649	0.8968	0.8703	0.8649	0.9358	0.6000	0.9355
function	0.9523	0.9405	0.9155	0.9138	0.9193	0.9155	0.9376	0.9195	0.9155	0.9649	0.6238	0.9647
Average	0.8264	0.8010	0.6390	0.6886	0.7279	0.6390	0.7724	0.6883	0.6390	0.7598	0.7598	0.7550
Rank	2.2000	3.8667	9.6000	7.8667	6.5667	9.6000	5.3333	8.5667	9.6000	4.7000	4.8667	5.2333

**Fig. 5.** Bonferroni-Dunn test for accuracy.**Fig. 6.** Bonferroni-Dunn test for precision.**Fig. 7.** Bonferroni-Dunn test for recall.**Fig. 8.** Bonferroni-Dunn test for Cohen's Kappa rate.**Fig. 9.** Bonferroni-Dunn test for AUC

the results tables, and the lowest (best) rank value is typeset in bold. Table 14 contains the ranks and meta-rank of all methods, which helps determine and visualize the best performing algorithms across all datasets and metrics.

After the Iman-Davenport test indicates significant differences, the Bonferroni-Dunn post-hoc test [63] is then used to find where they occur between algorithms by assuming the classifiers' performances are different by at least some critical value [64]. Below each result table, a figure highlighting the critical distance (in gray), from the best ranking algorithm to the rest, is shown. The algorithms to the right of the critical distance bar perform statistically significantly worse than the control algorithm, MIRSVM.

Figs. 5–10 show the results of the Bonferroni-Dunn post-hoc procedure over the metrics in (12), as well as the meta-rank results in Table 14.

The Holm (multiple) and Wilcoxon (pairwise) rank-sum post-hoc tests [65,66] were then run for each of the metrics to compute multiple and pairwise comparisons between the proposed algorithm and the state-of-the-art methods, investigating whether statistical differences exist among the algorithms' results. Tables 4, 6, 8, 10, and 12 show the p -values for the Holm test for $\alpha = 0.05$, and the rank-sums and adjusted p -values for the Wilcoxon test.




Fig. 10. Bonferroni-Dunn test for overall ranks comparison

Table 4

Holm and Wilcoxon tests for Accuracy.

MIRSV vs.	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
Holm p -value	0.0500	0.0045	0.0071	0.0083	0.0050	0.0100	0.0063	0.0056	0.0250	0.0167	0.0125
Wilcoxon p -value	0.0279	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0067	0.3028	0.0103
Wilcoxon R^+	98.500	120.00	119.00	120.00	120.00	120.00	120.00	120.00	106.00	79.000	104.00
Wilcoxon R^-	21.500	0.0000	1.0000	0.0000	0.0000	0.0000	0.0000	0.0000	14.000	41.000	16.000

Table 5

Precision.

Datasets	MIRSV	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	0.7778	0.7778	1.0000	1.0000	0.2857	1.0000	1.0000	0.5000	1.0000	0.6429	0.6514	0.4000
eastWest	0.7143	0.7000	0.5000	0.8750	0.5882	0.5000	0.7429	1.0000	0.5000	0.6053	0.6053	0.4444
westEast	0.7272	0.7273	0.5000	0.2727	0.4600	0.5000	0.6939	0.3600	0.5000	0.5581	0.9729	0.6038
musk1	0.8519	0.7778	1.0000	0.9286	0.9048	1.0000	0.8049	0.8108	1.0000	0.8478	0.8817	0.8478
musk2	0.7059	0.7826	0.6139	0.7826	0.7576	0.6139	0.7424	0.7538	0.6139	0.7400	0.9138	0.7164
webmining	0.7500	1.0000	0.8142	0.8173	0.8142	0.8142	0.8936	1.0000	0.8142	0.8817	0.9462	0.8500
trx	1.0000	0.8571	0.8705	0.9306	0.9191	0.8705	0.8705	0.8705	0.8705	0.9138	0.6747	0.9011
mutagenesis-atoms	0.7872	0.7985	1.0000	0.4630	0.6111	1.0000	0.5439	1.0000	1.0000	0.7059	0.7059	0.6667
mutagenesis-bonds	0.8468	0.8195	1.0000	0.5385	0.7500	1.0000	0.6812	1.0000	1.0000	0.7857	0.7857	0.8333
mutagenesis-chains	0.8571	0.8116	1.0000	0.5091	0.7059	1.0000	0.7759	1.0000	1.0000	0.7705	0.7705	0.7581
tiger	0.7365	0.7323	0.5000	0.5000	0.6944	0.5000	0.7444	0.7802	0.5000	0.6514	0.8000	0.7320
elephant	0.8576	0.8750	0.5000	0.5000	0.7959	0.5000	0.8444	0.7679	0.5000	0.8000	0.5581	0.8283
fox	0.6040	0.6275	0.5000	0.5000	0.5833	0.5000	0.5287	0.4854	0.5000	0.6747	0.8478	0.6705
component	0.9866	0.7782	0.8649	0.8778	0.8902	0.8649	0.8958	0.8696	0.8649	0.9462	0.6429	0.9449
function	0.8459	0.6775	0.9155	0.9202	0.9317	0.9155	0.9376	0.9197	0.9155	0.9729	0.7400	0.9726
Average	0.8033	0.7828	0.7719	0.6944	0.7128	0.7719	0.7800	0.8079	0.7719	0.7665	0.7665	0.7447
Rank	5.3333	6.1333	7.1000	7.3333	7.3667	7.1000	5.8667	5.8667	7.1000	5.9000	6.3333	6.5667

Table 6

Holm and Wilcoxon tests for precision.

MIRSV vs.	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
Holm p -value	0.0125	0.0056	0.0050	0.0045	0.0063	0.0250	0.0500	0.0071	0.0167	0.0100	0.0083
Wilcoxon p -value	0.4212	0.5614	0.0946	0.0256	0.5614	0.4212	0.8039	0.5614	0.1354	0.4543	0.1354
Wilcoxon R^+	75.000	71.000	90.000	99.000	71.000	75.000	55.000	71.000	87.000	74.000	87.000
Wilcoxon R^-	45.000	49.000	30.000	21.000	49.000	45.000	65.000	49.000	33.000	46.000	33.000

Table 7

Recall.

Datasets	MIRSV	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	1.0000	1.0000	0.0000	0.4500	0.1000	0.0000	0.4500	0.5000	0.0000	0.4500	0.7100	0.3333
eastWest	1.0000	0.7000	0.7000	0.5250	0.7500	0.7000	0.6500	0.1250	1.0000	0.5750	0.5750	0.4000
westEast	0.8000	0.8000	0.9000	0.1500	0.5750	0.9000	0.8500	0.2250	1.0000	0.6000	0.9892	0.8000
musk1	0.9787	0.8936	0.0000	0.5778	0.8444	0.0000	0.7333	0.6667	0.0000	0.8667	0.8913	0.8667
musk2	0.9231	0.4615	1.0000	0.8710	0.8065	1.0000	0.7903	0.7903	1.0000	0.5968	0.9464	0.7742
webmining	0.2857	0.0000	1.0000	0.9239	1.0000	1.0000	0.9130	0.6196	1.0000	0.8913	0.9815	0.9239
trx	0.4833	0.2400	1.0000	0.9583	0.9464	1.0000	1.0000	1.0000	1.0000	0.9464	0.5600	0.9762
mutagenesis-atoms	0.8880	0.8560	0.0000	0.3968	0.3492	0.0000	0.4921	0.0000	0.0000	0.5714	0.5714	0.5714
mutagenesis-bonds	0.8960	0.8720	0.0000	0.5556	0.4762	0.0000	0.7460	0.0000	0.0000	0.6984	0.6984	0.7143
mutagenesis-chains	0.9120	0.8960	0.0000	0.4444	0.5714	0.0000	0.7143	0.0000	0.0000	0.7460	0.7460	0.7460
tiger	0.8700	0.9300	0.5000	1.0000	0.7500	0.5000	0.6700	0.7100	1.0000	0.7100	0.8000	0.7100
elephant	0.9100	0.7700	0.6000	1.0000	0.7800	0.6000	0.7600	0.8600	1.0000	0.8000	0.6000	0.8200
fox	0.9000	0.6400	0.7000	1.0000	0.5600	0.7000	0.4600	0.8300	1.0000	0.5600	0.8667	0.5900
component	0.5839	0.5225	1.0000	0.9867	0.9797	1.0000	0.9967	1.0000	1.0000	0.9815	0.4500	0.9826
function	0.5327	0.5643	1.0000	0.9919	0.9840	1.0000	0.9983	0.9994	1.0000	0.9892	0.5968	0.9894
Average	0.7976	0.6764	0.5600	0.7221	0.6982	0.5600	0.7483	0.5551	0.6667	0.7322	0.7322	0.7465
Rank	4.8667	6.5667	6.8667	6.3333	7.3667	6.8667	6.7000	7.4333	4.8333	7.3667	6.0667	6.7333

Table 8

Holm and Wilcoxon tests for recall.

MIRSV vs.	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
Holm p -value	0.0125	0.0063	0.0167	0.0050	0.0071	0.0100	0.0045	0.0500	0.0056	0.0250	0.0083
Wilcoxon p -value	0.0060	0.2077	0.5614	0.4543	0.2077	0.6387	0.1070	0.6603	0.5995	0.1354	0.5721
Wilcoxon R^+	106.50	83.000	71.000	74.000	83.000	69.000	89.000	60.000	70.000	87.000	62.000
Wilcoxon R^-	13.500	37.000	49.000	46.000	37.000	51.000	31.000	45.000	50.000	33.000	43.000

Table 9
Cohen's Kappa rate.

Datasets	MIRSVM	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	0.6829	0.6829	0.0000	0.4500	−0.1500	0.0000	0.4500	0.0000	0.0000	0.2000	0.3300	−0.0964
eastWest	0.6000	0.4000	0.0000	0.4500	0.2250	0.0000	0.4250	0.1250	0.0000	0.2000	0.2000	−0.1000
westEast	0.5000	0.5000	0.0000	−0.2500	−0.1000	0.0000	0.4750	−0.1750	0.0000	0.1250	0.7529	0.2750
musk1	0.8036	0.6290	0.0000	0.5396	0.7604	0.0000	0.5642	0.5197	0.0000	0.7174	0.3744	0.7174
musk2	0.6540	0.4123	0.0000	0.5031	0.4039	0.0000	0.3613	0.3856	0.0000	0.2492	0.3858	0.2940
webmining	0.3468	0.0000	0.0000	0.0246	0.0000	0.0000	0.4535	0.3771	0.0000	0.3744	0.6945	0.2458
trx	0.2100	0.3375	0.0000	0.5228	0.4224	0.0000	0.0000	0.0000	0.0000	0.3858	0.2900	0.3364
mutagenesis-atoms	0.5395	0.4431	0.0000	0.1709	0.2654	0.0000	0.2909	0.0000	0.0000	0.4738	0.4738	0.4431
mutagenesis-bonds	0.5699	0.5070	0.0000	0.3131	0.4356	0.0000	0.5569	0.0000	0.0000	0.6195	0.6195	0.6659
mutagenesis-chains	0.6303	0.5094	0.0000	0.2359	0.4738	0.0000	0.6225	0.0000	0.0000	0.6391	0.6391	0.6285
tiger	0.5500	0.5900	0.0000	0.0000	0.4200	0.0000	0.4400	0.5100	0.0000	0.3300	0.6000	0.4500
elephant	0.7000	0.6600	0.0000	0.0000	0.5800	0.0000	0.6200	0.6000	0.0000	0.6000	0.1250	0.6500
fox	0.3100	0.2600	0.0000	0.0000	0.1600	0.0000	0.0500	−0.0500	0.0000	0.2900	0.7174	0.3000
component	0.6644	0.5795	0.0000	0.1613	0.2836	0.0000	0.3656	0.0675	0.0000	0.6945	0.2000	0.6906
function	0.6292	0.5838	0.0000	0.0966	0.2801	0.0000	0.4083	0.0933	0.0000	0.7529	0.2492	0.7507
Average	0.5594	0.4730	0.0000	0.2145	0.2973	0.0000	0.4056	0.1635	0.0000	0.4434	0.4434	0.4167
Rank	2.6333	4.2000	10.1667	7.0000	6.5333	10.1667	5.2333	8.3667	10.1667	4.2667	4.2667	5.0000

Table 10
Holm and Wilcoxon tests for Cohen's Kappa rate.

MIRSVM vs. Holm <i>p</i> -value	miGraph 0.0500	MIBoost 0.0045	MIOptimalBall 0.0071	MIDD 0.0083	MIWrapper 0.0050	MISMO 0.0100	MISVM 0.0063	SimpleMI 0.0056	TLC 0.0167	Bagging 0.0250	Stacking 0.0125
Wilcoxon <i>p</i> -value	0.0121	0.0001	0.0012	0.0012	0.0001	0.0006	0.0001	0.0001	0.1205	0.2077	0.0946
Wilcoxon R ⁺	91.500	120.00	113.00	113.00	120.00	115.00	119.00	120.00	88.000	83.000	90.000
Wilcoxon R [−]	13.500	0.0000	7.0000	7.0000	0.0000	5.0000	1.0000	0.0000	32.000	37.000	30.000

Table 11
AUC.

Datasets	MIRSVM	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	0.8333	0.8333	0.5000	0.7250	0.4250	0.5000	0.7250	0.5000	0.5000	0.6000	0.6650	0.4524
eastWest	0.8000	0.7000	0.5000	0.7250	0.6125	0.5000	0.7125	0.5625	0.5000	0.6000	0.6000	0.4500
westEast	0.7500	0.7500	0.5000	0.3750	0.4500	0.5000	0.7375	0.4125	0.5000	0.5625	0.8456	0.6375
musk1	0.9005	0.8135	0.5000	0.7676	0.8797	0.5000	0.7816	0.7589	0.5000	0.8589	0.6837	0.8589
musk2	0.8406	0.6904	0.5000	0.7432	0.6981	0.5000	0.6772	0.6900	0.5000	0.6317	0.6732	0.6435
webmining	0.6320	0.5000	0.5000	0.5096	0.5000	0.5000	0.7184	0.8098	0.5000	0.6837	0.8123	0.6048
trx	0.6500	0.6170	0.5000	0.7392	0.6932	0.5000	0.5000	0.5000	0.5000	0.6732	0.6450	0.6281
mutagenesis-atoms	0.7106	0.7137	0.5000	0.5824	0.6186	0.5000	0.6420	0.5000	0.5000	0.7257	0.7257	0.7137
mutagenesis-bonds	0.7856	0.7455	0.5000	0.6578	0.6981	0.5000	0.7850	0.5000	0.5000	0.8012	0.8012	0.8211
mutagenesis-chains	0.8252	0.7417	0.5000	0.6142	0.7257	0.5000	0.8051	0.5000	0.5000	0.8170	0.8170	0.8130
tiger	0.7750	0.7950	0.5000	0.5000	0.7100	0.5000	0.7200	0.7550	0.5000	0.6650	0.8000	0.7250
elephant	0.8200	0.8300	0.5000	0.5000	0.7900	0.5000	0.8100	0.8000	0.5000	0.8000	0.5625	0.8250
fox	0.6550	0.6300	0.5000	0.5000	0.5800	0.5000	0.5250	0.4750	0.5000	0.6450	0.8589	0.6500
component	0.7855	0.7496	0.5000	0.5536	0.6033	0.5000	0.6272	0.5201	0.5000	0.8123	0.6000	0.8081
function	0.7563	0.7698	0.5000	0.5298	0.6015	0.5000	0.6391	0.5268	0.5000	0.8456	0.6317	0.8434
Average	0.7680	0.7253	0.5000	0.6015	0.6390	0.5000	0.6937	0.5874	0.5000	0.7148	0.7148	0.6983
Rank	2.7667	4.2667	10.1667	7.0000	6.5333	10.1667	5.2333	8.2333	10.1667	4.2667	4.2667	4.9333

Table 12
Holm and Wilcoxon tests for AUC.

MIRSVM vs. Holm <i>p</i> -value	miGraph 0.0167	MIBoost 0.0045	MIOptimalBall 0.0071	MIDD 0.0083	MIWrapper 0.0050	MISMO 0.0100	MISVM 0.0063	SimpleMI 0.0056	TLC 0.0250	Bagging 0.0500	Stacking 0.0125
Wilcoxon <i>p</i> -value	0.0166	0.0001	0.0002	0.0003	0.0001	0.0012	0.0009	0.0001	0.2523	0.3028	0.0781
Wilcoxon R ⁺	90.000	120.00	118.00	117.00	120.00	113.00	114.00	120.00	81.000	79.000	91.500
Wilcoxon R [−]	15.000	0.0000	2.0000	3.0000	0.0000	7.0000	6.0000	0.0000	39.000	41.000	28.500

4.3. Accuracy

Table 3 shows the accuracy results of the 11 algorithms over 15 multi-instance datasets, along with their average and rank. The results indicate that the bag-based and ensemble learners perform better than the instance-based and wrapper methods. Specifically, MIRSVM achieves the best accuracy over 5 of the 15 datasets with a competitive average against the miGraph, Bagging, Stacking, and TLC algorithms. Note that MIRSVM performs better than MISVM for all datasets, indicating that using representatives from each bag

and limiting the number of support-vectors per negative bag improves the classification performance. The instance-level classifiers and wrapper methods, such as MIBoost, MIWrapper, and SimpleMI perform the worst. This behavior emphasizes the importance of not making prior assumptions about the positive bags' distributions.

Fig. 5 and Table 4 show the results for the statistical analysis on the accuracy results. The algorithms with ranking higher than 5.63 (MIRSVM rank + Bonferroni-Dunn critical value), to the right of the grey bar in Fig. 5, perform statistically worse than

Table 13
Run Time (seconds).

Datasets	MIRSVM	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
suramin	0.1	19.7	8.8	30.5	7922.0	9.5	52.3	333.9	7.2	35.5	183.0	90.6
eastWest	0.1	3.0	5.5	9.4	217.1	6.3	14.8	21.4	5.8	15.4	15.4	15.2
westEast	0.1	2.8	6.5	7.8	79.7	6.5	14.7	99.5	6.0	16.6	12128.1	10.8
musk1	0.4	56.8	13.4	32.1	3542.6	20.6	89.7	198.4	11.1	93.0	86272.6	759.5
musk2	2.3	452.3	97.3	782.9	126016.8	208.3	1799.4	26093.5	16.1	1772.2	2229.3	16759.0
webmining	300.6	302.5	45745.4	60474.8	47601.4	68736.7	51923.6	105622.3	2685.9	86272.6	9861.5	592948.9
trx	61.8	2206.4	17.6	682.3	339110.5	19.3	8670.3	134622.1	7.4	2229.3	243.3	11927.9
mutagenesis-atoms	9.8	193.1	8.8	99.2	2623.0	8.0	55.0	53.5	6.4	44.0	44.0	153.9
mutagenesis-bonds	8.3	410.3	10.2	310.2	17538.7	12.3	457.4	2794.8	8.4	131.1	131.1	853.1
mutagenesis-chains	19.3	513.4	12.0	525.0	48982.7	14.8	2451.9	6637.4	7.2	224.4	224.4	1619.0
tiger	29.5	302.8	44.5	157.8	23220.5	56.2	208.0	608.8	16.2	183.0	212.1	1085.0
elephant	47.7	306.7	45.5	243.9	56456.2	69.7	232.1	1114.3	20.8	212.1	16.6	1462.2
fox	81.0	303.1	44.2	206.1	27773.8	66.0	369.6	891.5	23.5	243.3	93.0	1729.1
component	231.7	3091.0	572.5	228209.6	96263.9	1096.9	629366.4	37224.6	144.0	9861.5	35.5	79149.8
function	740.3	8162.7	935.5	768458.0	350124.7	1887.5	1052225.3	565026.4	232.8	12128.1	1772.2	185918.5
Average	102.2	1088.4	3171.2	70682.0	76498.2	4814.6	116528.7	58756.2	213.3	7564.1	7564.1	59632.2
Rank	2.3	6.2	3.1	7.2	11.1	4.3	8.5	10.1	1.9	7.2	6.5	9.7

Table 14
Overall ranks comparison.

Ranks	MIRSVM	miGraph	MIBoost	MIOptimalBall	MIDD	MIWrapper	MISMO	MISVM	SimpleMI	TLC	Bagging	Stacking
Accuracy	2.2000	3.8667	9.6000	7.8667	6.5667	9.6000	5.3333	8.5667	9.6000	4.7000	4.8667	5.2333
Precision	5.3333	6.1333	7.1000	7.3333	7.3667	7.1000	5.8667	5.8667	7.1000	5.9000	6.3333	6.5667
Recall	4.8667	6.5667	6.8667	6.3333	7.3667	6.8667	6.7000	7.4333	4.8333	7.3667	6.0667	6.7333
Kappa	2.6333	4.2000	10.1667	7.0000	6.5333	10.1667	5.2333	8.3667	10.1667	4.2667	4.2667	5.0000
AUC	2.7667	4.2667	10.1667	7.0000	6.5333	10.1667	5.2333	8.2333	10.1667	4.2667	4.2667	4.9333
Time	2.2667	6.2000	3.1000	7.2000	11.0667	4.3000	8.5333	10.1333	1.8667	7.2000	6.4667	9.6667
Average	3.3444	5.2056	7.8333	7.1222	7.5722	8.0333	6.1500	8.1000	7.2889	5.6167	5.3778	6.3556
Rank	1.3333	3.6667	8.9167	7.7500	9.2500	9.0833	5.9167	8.7500	7.3333	5.2500	4.2500	6.5000

MIRSVM. Table 4 shows the p -values of the Holm and Wilcoxon tests and their results complement one another. Holm's procedure rejects those hypotheses having a p -value ≤ 0.01 , thus indicating that MIRSVM performs significantly better than all methods except miGraph, Bagging, Stacking, and TLC. The Wilcoxon p -values show significant differences exist among all algorithms except miGraph, Bagging, and Stacking. They also show that MIRSVM has significantly better accuracy than MIBoost, MIOptimalBall, MIDD, MIWrapper, MISMO, MISVM, and SimpleMI, each having respectively small p -values, highlighting MIRSVM's superior classification accuracy.

4.4. Precision & recall

Precision and recall are conflicting metrics that must be evaluated together in order to observe their behavior simultaneously, since they are both used to measure relevance. Tables 5 and 7 show the precision and recall results obtained by each algorithm. The precision and recall results for MIWrapper and SimpleMI indicate that they are unstable classifiers, exhibiting extreme variance in behavior, making them unsuitable for real-world applications. It is also interesting to analyze the performance on the mutagenesis datasets which have a larger number of positive bags than negative, where MISVM, MIBoost, MIWrapper, and SimpleMI predict all bags as negative. Additionally, while MISMO obtains unbiased results on these datasets, MIRSVM significantly outperforms it over both precision and recall, achieving a better trade-off.

Figs. 6 and 7 show that there are no statistically significant differences between the precision and recall results obtained by all algorithms. It is worth noting that MIRSVM outperforms both ensemble methods according to recall, despite them exhibiting relatively good accuracy and precision. This indicates that they are strongly conservative towards predicting positive bags. The Holm test indicates significant differences exist between MIRSVM and

all algorithms except miGraph, MISMO, MISVM, and TLC for precision, and all the above along with SimpleMI, MIOptimalBall, and Bagging for recall. The Wilcoxon p -values do not reflect significant differences for precision, but they do for recall. The tests' results are severely biased due to the extreme unbalanced behavior of the classifiers, whereas MIRSVM demonstrates proper balance of the precision-recall trade-off.

4.5. Cohen's Kappa rate

Table 9 shows the Cohen's Kappa rate results obtained by the algorithms. These results support the accuracy achieved by the algorithms, in the sense that the instance-based and wrapper methods perform worse than bag-based and ensemble learners. MIRSVM's kappa values all fall within the range $(0.5 - 1]$, indicating that its merit as a classifier agrees with the class distribution and is not random. Note that MIOptimalBall, MIDD, MISVM, MISMO, and Stacking contain some negative kappa values, indicating performance worse than the default-hypothesis. MIBoost, SimpleMI, and MIWrapper are shown to randomly classify all 15 datasets. Fig. 8 and Table 10 show the results of the statistical analysis on the Cohen's Kappa Rate results. The Holm and Wilcoxon procedures reflect results similar to the Bonferroni-Dunn test, where MIRSVM performs significantly better than MIOptimalBall, MIDD, MISVM, MIWrapper, MIBoost, and SimpleMI, having p -values < 0.01 . This supports MIRSVM's performance as a competitive classifier.

4.6. AUC

Table 11 shows AUC results obtained by the algorithms, which complement the accuracy and kappa rate, emphasizing the better performance of bag-based methods. MIRSVM achieves the best AUC score on 5 of the 15 datasets, while MIBoost, SimpleMI, and

MIWrapper obtain the worst results. Their AUC score indicates random predictor behavior, having values = 0.5. Bag-level methods all obtain scores between 0.7 and 0.77 indicating a high true positive rate and a low false positive rate, which is reflected by the precision and recall results. Fig. 9 and Table 12 show that MIRSVM performs significantly better than 6 out of the 11 competing algorithms. Holm's procedure indicates that significant differences exist between MIRSVM and all algorithms except miGraph, TLC, Bagging, and Stacking. MISVM's true positive rate could be affected because of the possible imbalance of support vectors from the positive and negative classes (favoring the negative). Note that the Wilcoxon p -values for MIWrapper, MIBoost, and SimpleMI are 0.0001.

4.7. Overall comparison

Table 13 shows the run times, in seconds, for each algorithm. MIRSVM has the fastest run time and is ranked second. MIRSVM shows very good scalability considering the number of features, such as in the webmining dataset which comprises of 5863 attributes. Additionally, taking into account the number of instances as seen in the two largest datasets, component and function, MIRSVM displays superior scalability. It is important to note that quadratic programming solvers are not the most efficient tools for solving optimization problems in terms of run time, and yet MIRSVM still is shown to perform competitively against the current state-of-the-art algorithms. The scalability of MIRSVM is founded on the speedy rate of bag-representative convergence, as shown previously in Fig. 3.

SimpleMI achieves the highest rank and competitive run times because, rather than using the instances in each bag to train a model, it takes the mean value of the instances in a bag and uses that for training. Even though SimpleMI has fast run-times, its performance over the previous metrics has been shown to be random and not as effective as the bag-level methods.

Table 14 shows the ranks achieved by each of the metrics along with the average and meta-ranks, to illustrate the overall performance across all metrics. MIRSVM has the best meta-rank (rank of the ranks) and the miGraph method has the second best. The meta-ranks also highlight the better performance of bag-level methods over instance-level and wrapper methods, emphasizing the importance of training at the bag-level. Not only does MIRSVM use bag-level information during classification, but it also optimizes over the instances within the bag, which helps determine which instances contribute the most information about the bags label. SimpleMI, MIWrapper, MIBoost, MISVM, and MDD have the worst performance compared to MIRSVM and miGraph. Specifically, it is evident from the precision and recall results that MIBoost, MIWrapper, and SimpleMI, for example, classify all bags as negative for datasets that have imbalanced class distributions which favor the negative class. This emphasizes the disadvantage of using wrapper methods and assuming the data distribution of the instances within positive bags. Although these algorithms are popular in literature, the experimental study clearly shows that recent bag-level and ensemble methods easily overcome traditional multi-instance learning algorithms.

In summary, MIRSVM offers improvement in terms of both accuracy and run-time when compared to referenced methods, especially those utilizing SVM-based algorithms.

5. Conclusion

This paper proposed a novel formulation and algorithm for the multiple-instance support vector machine problem, which optimizes bag classification via bag-representative selection. First, the primal formulation was posed and its dual was then derived and

solution computed using a quadratic programming solver. This formulation was designed to utilize bag-level information and find an optimal separating hyperplane between bags, rather than individual instances, using the standard multi-instance assumption. The SMI assumption states that a bag is labeled positive if and only if at least one instance within a bag is positive, and is negative otherwise. The key features of the proposed algorithm MIRSVM are its ability to identify instances within positive and negative bags, i.e. the support vectors or representatives, that highly impact the decision boundary and margin, as well as avoiding uncertainties and issues caused by techniques that flatten, subset, or under-represent positive instances within positively labeled bags. Additionally, it exhibits desirable convergence and scalability, making it suitable for large-scale learning tasks.

The experimental study showed the better performance of MIRSVM compared with state-of-the-art multi-instance support vector machines, traditional multi-instance learners, as well as ensemble methods. The results, according to a variety of performance metrics, were compared and further validated using statistical analysis with non-parametric tests which highlight the advantages of using bag-level based and ensemble learners, such as miGraph, Bagging, and Stacking, while showing the instance-level based learners performed poorly in comparison or were deemed as strongly biased and unstable classifiers. This was especially reflected in the meta-ranks comparison, shown in Table 14, over Accuracy, Precision, Recall, Cohen's Kappa, AUC, and run time, where instance-level learners were ranked last, whereas bag-level and ensemble learners were better in rank, and MIRSVM ranked first. Our proposal, MIRSVM, performs statistically better, neither compromising accuracy nor run-time while displaying a robust performance across all of the evaluated datasets.

MIRSVM could be further improved by investigating the following approaches. Rather than using a QP solver at each iteration of MIRSVM, a different optimal solver could be experimented with. Due to the run time implications of using a QP solver, using a different solver might improve MIRSVM's scalability. Another area to investigate would be implementing MIRSVM in high-performance distributed environments. A third concept to explore would be testing MIRSVM on highly imbalanced multi-instance datasets and observe its performance. MIRSVM could also be extended to handle multi-class multi-instance problems by using traditional methods such as one-versus-one, where $c(c-1)/2$ classifiers are trained for a c -class problem, and one-versus-all, where a single classifier is trained per class [67].

Acknowledgment

This research was supported by the Spanish Ministry of Economy and Competitiveness, project TIN2017-83445-P and by FEDER funds.

References

- [1] S. Andrews, I. Tschantzaris, T. Hofmann, Support vector machines for multiple-instance learning, in: Proceedings of the 15th International Conference on Neural Information Processing Systems, 2002, pp. 577–584.
- [2] X. Qi, Y. Han, Incorporating multiple SVMs for automatic image annotation, Pattern Recognit. 40 (2) (2007) 728–741.
- [3] L. Cao, F. Luo, L. Chen, Y. Sheng, H. Wang, C. Wang, R. Ji, Weakly supervised vehicle detection in satellite images via multi-instance discriminative learning, Pattern Recognit. 64 (2017) 417–424.
- [4] Y. Yi, M. Lin, Human action recognition with graph-based multiple-instance learning, Pattern Recognit. 53 (2016) 148–162.
- [5] F. Herrera, S. Ventura, R. Bello, C. Cornelis, A. Zafra, D. Sánchez-Tarragó, S. Vluymans, Multiple Instance Learning Foundations and Methods, Springer, 2016.
- [6] T. Dietterich, R. Lathrop, T. Lozano-Perez, Solving the multiple instance problem with axis-parallel rectangles, Artificial Intell. 89 (1997) 31–71.
- [7] J. Foulds, E. Frank, A review of multi-instance learning assumptions, Knowl. Eng. Rev. 25-1 (2010) 1–24.
- [8] E. Alpaydin, V. Cheplygina, M. Loog, D. Tax, Single- vs. multiple-instance classification, Pattern Recognit. 48 (9) (2015) 2831–2838.

- [9] Y. Li, D.M. Tax, R.P. Duin, M. Loog, Multiple-instance learning as a classifier combining problem, *Pattern Recognit.* 46 (3) (2013) 865–874.
- [10] S. Ray, M. Craven, Supervised versus multiple instance learning: an empirical comparison, in: *Proceeding of the International Conference on Machine Learning*, 2005, pp. 697–704.
- [11] O.M.T. Lozano-Pérez, A framework for multiple-instance learning, *Neural Inf. Process. Syst.* 3201 (1998) 570–576.
- [12] Q. Zhang, S. Goldman, Em-DD: an improved multiple-instance learning technique, in: *Advances in Neural Information Processing Systems*, 2002, pp. 1073–1080.
- [13] M. Carboneau, E. Granger, A. Raymond, G. Gagnon, Robust multiple-instance learning ensembles using random subspace instance selection, *Pattern Recognit.* 58 (2016) 83–99.
- [14] A. Faria, F. Coelho, A. Silva, H. Rocha, G. Almeida, A. Lemos, A. Braga, MILKDE: a new approach for multiple instance learning based on positive instance selection and kernel density estimation, *Eng. Appl. Artif. Intell.* 59 (2017) 196–204.
- [15] G. Vanwinckelen, V. Tragante do O, D. Fierens, H. Blockeel, Instance-level accuracy versus bag-level accuracy in multi-instance learning, *Data Min. Knowl. Discov.* 30 (2) (2016) 313–341.
- [16] T. Huang, V. Kecman, I. Kopriva, *Kernel Based Algorithms for Mining Huge Data Sets, Supervised, Semi-Supervised, and Unsupervised Learning*, Springer-Verlag, 2006.
- [17] B. Schölkopf, A. Smola, *Learning with Kernels; Support Vector Machines, Regularization, Optimization, and Beyond*, MIT Press, 2002.
- [18] V. Kecman, Iterative k data algorithm for solving both the least squares svm and the system of linear equations, in: *Proceedings of the IEEE SoutheastCon*, 2015, pp. 1–6.
- [19] G. Melki, V. Kecman, Speeding up online training of 11 support vector machines, in: *Proceedings of the IEEE SoutheastCon*, 2016, pp. 1–6.
- [20] D. Chen, Y. Tian, X. Liu, Structural nonparallel support vector machine for pattern recognition, *Pattern Recognit.* 60 (2016) 296–305.
- [21] J. Amores, Multiple instance classification: review, taxonomy and comparative study, *Artificial Intell.* 201 (2013) 81–105.
- [22] M. Qiao, L. Liu, J. Yu, C. Xu, D. Tao, Diversified dictionaries for multi-instance learning, *Pattern Recognit.* 64 (2017) 407–416.
- [23] P. Auer, R. Ortner, A boosting approach to multiple instance learning, in: *Proceedings of the 15th European Conference on Machine Learning*, 3201 LNCS, 2004, pp. 63–74.
- [24] Y. Chen, J. Bi, J. Wang, MILES: multiple-instance learning via embedded instance selection, *IEEE Trans. Pattern Anal. Mach. Intell.* 28 (12) (2006) 1931–1947.
- [25] Y. Chen, J. Wang, Image categorization by learning and reasoning with regions, *J. Mach. Learn. Res.* 5 (2004) 913–939.
- [26] Z. Fu, A. Robles-Kelly, J. Zhou, MILIS: multiple instance learning with instance selection, *IEEE Trans. Pattern Anal. Mach. Intell.* 33 (5) (2011) 958–977.
- [27] P. Viola, J. Platt, C. Zhang, Multiple instance boosting for object detection, in: *Advances in Neural Information Processing Systems*, 2005, pp. 1417–1424.
- [28] L. Dong, A comparison of multi-instance learning algorithms, *The University of Waikato*, 2006 Master of Science Thesis.
- [29] R. Bunescu, R. Mooney, Multiple instance learning for sparse positive bags, in: *Proceedings of the Annual International Conference on Machine Learning*, 2007, pp. 105–112.
- [30] J. Wang, J. Zucker, Solving the multiple-instance problem: a lazy learning approach, in: *Proceedings of the International Conference on Machine Learning*, 2000, pp. 1119–1126.
- [31] Y. Xu, C. Shih, Multiple-instance learning via decision-based neural networks, *Intell. Decis. Technol.* 10 (2011) 885–895.
- [32] H. Blockeel, D. Page, A. Srinivasan, Multi-instance tree learning, in: *Proceedings of the International Conference on Machine Learning*, 2005, pp. 57–64.
- [33] L. Bjerring, E. Frank, Beyond trees: adopting MITI to learn rules and ensemble classifiers for multi-instance data, in: *Proceedings of the Australasian Joint Conference on Artificial Intelligence*, 2011, pp. 41–50.
- [34] M. Hall, E. Frank, G. Holmes, B. Pfahringer, P. Reutemann, I. Witten, *The WEKA data mining software: an update*, *SIGKDD Explor.* 11 (2009) 10–18.
- [35] E.T. Frank, X. Xu, Applying propositional learning algorithms to multi-instance data, Technical Report, University of Waikato, 2003. Department of Computer Science, University of Waikato, Hamilton, NZ.
- [36] X. Wang, X. Liu, S. Matwin, N. Japkowicz, H. Guo, A multi-view two-level classification method for generalized multi-instance problems, in: *Proceeding of the IEEE International Conference on Big Data*, 2014, pp. 104–111.
- [37] A. Cano, An ensemble approach to multi-view multi-instance learning, *Knowl.-Based Syst.* 136 (2017) 46–57.
- [38] A. Cano, A. Zafra, S. Ventura, Speeding up multiple instance learning classification rules on GPUs, *Knowl. Inf. Syst.* 44 (1) (2015) 127–145.
- [39] J. Luna, A. Cano, V. Sakalauskas, S. Ventura, Discovering useful patterns from multiple instance data, *Inf. Sci.* 357 (2016) 23–38.
- [40] V. Kecman, *Learning and Soft Computing: Support Vector Machines, Neural Networks, and Fuzzy Logic Models*, MIT Press, 2001.
- [41] S. Shalev-Shwartz, S. Ben-David, *Understanding Machine Learning: From Theory to Algorithms*, Cambridge University Press, 2014.
- [42] C. Cortes, V. Vapnik, Support-vector networks, *Mach. Learn.* 20 (3) (1995) 273–297.
- [43] D. Wang, X. Zhang, M. Fan, X. Ye, Hierarchical mixing linear support vector machines for nonlinear classification, *Pattern Recognit.* 59 (2016) 255–267.
- [44] M. Carrasco, J. López, S. Maldonado, A multi-class svm approach based on the 1-norm minimization of the distances between the reduced convex hulls, *Pattern Recognit.* 48 (5) (2015) 1598–1607.
- [45] Q. Fan, Z. Wang, H. Zha, D. Gao, Mreklm: A fast multiple empirical kernel learning machine, *Pattern Recognit.* 61 (2017) 197–209.
- [46] J. Nocedal, S. Wright, *Numerical Optimization*, Springer, 2006.
- [47] J. Platt, Sequential minimal optimization: a fast algorithm for training support vector machines, Technical Report: MSR-TR-98-14, 1998.
- [48] S. Boyd, L. Vandenberghe, *Convex Optimization*, Cambridge University Press, 2004.
- [49] V. Kecman, T. Huang, M. Vogt, Iterative single data algorithm for training kernel machines from huge data sets: theory and performance, *Stud. Comput. Intell.* 177 (2005) 255–274.
- [50] V. Kecman, L. Zigic, Algorithms for direct L2 support vector machines, in: *Proceedings of the IEEE International Symposium on Innovations in Intelligent Systems and Applications*, 2014, pp. 419–424.
- [51] R. Wang, S. Kwong, Active learning with multi-criteria decision making systems, *Pattern Recognit.* 47 (9) (2014) 3106–3119.
- [52] C. Yang, M. Dong, J. Hua, Region-based image annotation using asymmetrical support vector machine-based multiple-instance learning, in: *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, 2006, pp. 2057–2063.
- [53] T. Gärtner, P. Flach, A. Kowalczyk, A. Smola, Multi-instance kernels, in: *Proceedings of the International Conference on Machine Learning*, 2002, pp. 179–186.
- [54] M. Blaschko, T. Hofmann, Conformal multi-instance kernels, in: *Proceedings of the Conference on Advances in Neural Information Processing Systems*, 2006, pp. 1–6.
- [55] Z.-H. Zhou, Y.-Y. Sun, Y.-F. Li, Multi-instance learning by treating instances as non-i.i.d. samples, in: *Proceedings of the 26th Annual International Conference on Machine Learning*, 2009, pp. 1249–1256.
- [56] A. Ulas, O.T. Yildiz, E. Alpaydm, Cost-conscious comparison of supervised learning algorithms over multiple data sets, *Pattern Recognit.* 45 (4) (2012) 1772–1781.
- [57] J. Alcalá-Fdez, A. Fernández, J. Luengo, J. Derrac, S. García, L. Sánchez, F. Herrera, KEEL Data-mining software tool: data set repository, integration of algorithms and experimental analysis framework, analysis framework, *J. Multiple-Valued Log. Soft Comput.* 17 (2011) 255–287.
- [58] X. Xu, Statistical learning in multiple instance problem, University of Waikato, 2003 Master's thesis.
- [59] A. Ben-David, About the relationship between ROC curves and Cohen's kappa, *Eng. Appl. Artif. Intell.* 21 (6) (2008) 874–882.
- [60] J. Derrac, S. García, D. Molina, F. Herrera, A practical tutorial on the use of nonparametric statistical tests as a methodology for comparing evolutionary and swarm intelligence algorithms, *Swarm Evol. Comput.* 1 (1) (2011) 3–18.
- [61] S. García, A. Fernández, J. Luengo, F. Herrera, Advanced nonparametric tests for multiple comparisons in the design of experiments in computational intelligence and data mining: experimental analysis of power, *Inf. Sci.* 180 (10) (2010) 2044–2064.
- [62] S. García, F. Herrera, An extension on statistical comparisons of classifiers over multiple data sets; for all pairwise comparisons, *J. Mach. Learn. Res.* 9 (2008) 2677–2694.
- [63] O. Dunn, Multiple comparisons among means, *J. Am. Stat. Assoc.* 56 (1961) 52–64.
- [64] S. García, D. Molina, M. Lozano, F. Herrera, A study on the use of non-parametric tests for analyzing the evolutionary algorithms' behaviour - a case study on the CEC2005 special session on real parameter optimization, *Heuristics* 15 (2008) 617–644.
- [65] J. Gibbons, S. Chakraborti, *Nonparametric Statistical Inference*, 5th, Chapman & Hall/CRC Press, 2011.
- [66] M. Hollander, D. Wolfe, *Nonparametric Statistical Methods*, John Wiley & Sons, Inc., 1999.
- [67] C. Bishop, *Pattern Recognition and Machine Learning (Information Science and Statistics)*, Springer, New York, 2007.

Gabriella Melki is a Ph.D. student in the Department of Computer Science at the Virginia Commonwealth University, where she obtained her M.Sc. degree in Computer Science. Her research is focused on machine learning algorithms, support vector machines, optimization, and data mining.

Alberto Cano is Assistant Professor in the Department of Computer Science at the Virginia Commonwealth University. His research is focused on machine learning, scalable data mining, soft computing, parallel computing and general-purpose GPU systems.

Sebastian Ventura is Full Professor in the Department of Computer Science and Numerical Analysis at the University of Cordoba, where he heads the Knowledge Discovery and Intelligent Systems Research Laboratory. His main research interests are in the fields of soft-computing, machine learning, data mining, and their applications.