

Звіт

Автор: Водолазський Микола Анатолійович

KIT-118a

Лабораторна робота №13

Паралельне виконання. Багатопоточність

Мета:

- Розширення функціональності параметризованих класів.

Вимоги

1. Використовуючи програми рішень попередніх задач, продемонструвати можливість паралельної обробки елементів контейнера: створити не менше трьох додаткових потоків, на яких викликати відповідні методи обробки контейнера.
2. Забезпечити можливість встановлення користувачем максимального часу виконання (таймаута) при закінченні якого обробка повинна припинятися незалежно від того знайдений кінцевий результат чи ні.
3. Для паралельної обробки використовувати алгоритми, що не змінюють початкову колекцію.
4. Кількість елементів контейнера повинна бути досить велика, складність алгоритмів обробки колекції повинна бути зіставна, а час виконання приблизно однаковий, наприклад:
 - пошук мінімуму або максимуму;
 - обчислення середнього значення або суми;
 - підрахунок елементів, що задовольняють деякій умові;
 - відбір за заданим критерієм;
 - власний варіант, що відповідає обраній прикладної області.
 -

ПРИКЛАДНА ЗАДАЧА:

Кадрове агентство. Сортування за назвою фірми, за назвою запропонованої спеціальності, за вказаною освітою.

ОПИС ПРОГРАМИ

2.1 Опис змінних:

```
LinkedContainer<SecondCreate> stringLinked = new LinkedContainer<>();//  
об'єкт параметризованого контейнера
```

```
Scanner scan = new Scanner(System.in); // змінна для активування  
зчитування з консолі
```

2.2 Ієрархія та структура класів.

Main class – головний клас. Містить метод main(точку входу у програму) та методи по роботі з програмою для реалізації індивідуального завдання.

interface iLinked - інтерфейс контейнеру

class SecondCreate - клас прикладної задачі кадрового агенства

class linkedContainer - параметризований клас-контейнер, котрий зберігає інформацію агенства

ТЕКСТ ПРОГРАМИ

File Main.java:

```
import javax.xml.parsers.ParserConfigurationException;  
import javax.xml.transform.TransformerException;  
import java.io.*;  
import java.util.Arrays;  
import java.util.Comparator;  
import java.util.LinkedList;  
import java.util.Scanner;  
import java.io.*;  
import java.util.concurrent.*;  
import java.util.regex.Matcher;  
import java.util.regex.Pattern;  
  
public class Main implements Serializable {  
  
    public static void fileRead() throws IOException, ParserConfigurationException,  
TransformerException, InterruptedException, ExecutionException, TimeoutException {  
        linkedContainer<SecondCreate> linkedContainer = new  
linkedContainer<SecondCreate>();  
  
        File file = new File("file.txt");  
  
        Scanner scanner = new Scanner(file);  
  
        String line = scanner.nextLine();  
        String[] array = line.split(" ");  
  
        String company = null;  
        String specialisation = null;  
        String workingConditions = null;  
        int payment = 0;
```

```

int workingExperience = 0;
String education = null;
String English = null;
String Licence = null;

for (int i = 0; i < array.length; i++) {
    company = array[0].toString();
    specialisation = array[1].toString();
    workingConditions = array[2].toString();
    payment = Integer.parseInt(array[3]);
    workingExperience = Integer.parseInt(array[4]);
    education = array[5].toString();
    Licence = array[6].toString();
    English = array[7].toString();
}

```

```

regCheck(company,specialisation,workingConditions,payment,workingExperience,education
,Licence, English);

```

```

SecondCreate firstWorker = new SecondCreate(company, specialisation,
workingConditions, payment, workingExperience, education,Licence,English);
SecondCreate secondCreate = new SecondCreate("epam", "teacher", "good", 100,
1, "none","no","no");
SecondCreate thirdWorker = new SecondCreate("globalLogic","teacher","10.00-
19.00",300,11,"magistry","yes","yes");

```

```

SecondCreate[] arr = {firstWorker, secondCreate,thirdWorker};

```

```

System.out.println("SORT BY COMPANY NAME");
Arrays.sort(arr);

```

```

for (SecondCreate tmp : arr) {
    System.out.println(tmp);
}
comparatorC comparatorC = new comparatorC();

```

```

System.out.println("SORT BY Specialisation");
Arrays.sort(arr,comparatorC);

```

```

for(SecondCreate tmpss : arr)
{
    System.out.println(tmpss);
}

```

```

System.out.println("SORT BY EDUCATION");

```

```

secondComparator secondComparator = new secondComparator();
Arrays.sort(arr,secondComparator);

```

```

for(SecondCreate tmpp : arr)
{
    System.out.println(tmpp);
}

```

[illegible]

```

        //long result = finnish - begin;
        //System.out.println("Time parralell threads was working " + result + "
        Milliseconds");

        // Конец потока с ограничением по времени

        // Два потока без ограничения по времени

        //long start = System.currentTimeMillis();

        FirstThread threadFirst = new FirstThread(linkedContainer);
        ExecutorService executorServiceFirst = Executors.newFixedThreadPool(1);
        executorServiceFirst.submit(threadFirst);
        executorServiceFirst.shutdown();

        SecondThead threadSecond = new SecondThead(linkedContainer);
        ExecutorService executorServiceSecond = Executors.newFixedThreadPool(1);
        executorServiceSecond.submit(threadSecond);
        executorServiceSecond.shutdown();

        ThirdThread threadThird = new ThirdThread(linkedContainer);
        ExecutorService executorServiceThird = Executors.newFixedThreadPool(1);
        executorServiceThird.submit(threadThird);
        executorServiceThird.shutdown();

        //long stop = System.currentTimeMillis();
        //long res = stop - start;

        //System.out.println("Time consecutive threads was working = " + res + "
        milliseconds");

        linkedContainer.addLast(secondCreate);
        linkedContainer.addLast(thirdWorker);

        // конец потоков без ограничения по времени

        // Поиск элемента соответствующего заданым критериям
        textsort(linkedContainer);
    }

    public static void textsort(linkedContainer<SecondCreate> linkedContainer)
    {
        for (SecondCreate t : linkedContainer)
        {
            Pattern p1 = Pattern.compile("teacher", Pattern.CASE_INSENSITIVE);
            Matcher m1 = p1.matcher(t.getSpecialisation());
            if (m1.find()) {
                if (t.getWorkingExperience() >= 10) {
                    Pattern p2 = Pattern.compile("yes", Pattern.CASE_INSENSITIVE);
                    Matcher m2 = p2.matcher(t.getEnglish());
                    if (m2.find()) {
                        Pattern p3 = Pattern.compile("yes",
Pattern.CASE_INSENSITIVE);
                        Matcher m3 = p3.matcher(t.getLicence());
                        if (m3.find()) {
                            System.out.println(t);
                        }
                    }
                }
            }
        }
    }

```

```

    }
}

}

}

    public static void serialize(linkedContainer<SecondCreate> linkedContainer)
throws IOException, ParserConfigurationException, TransformerException{
    XmlRead xmlRead = new XmlRead();
    XmlWrite xmlWrite = new XmlWrite();
    xmlWrite.write(linkedContainer,"XML.xml");

    linkedContainer<SecondCreate> newXml = XmlRead.read("XML.xml");

    for(SecondCreate t : newXml )
    {
        System.out.println(t);
    }

}

    public static void regCheck(String company, String specialisation, String
workingConditions, int payment, int workingExperience, String education, String
License, String English)
    {
        if(company.matches("[a-zA-Z0-9]*") == true)
        {
            System.out.println("OK");
        }
        else
        {
            System.out.println("Rename company");
        }
        if(specialisation.matches("[0-9]*"))
        {
            System.out.println("OK");
        }
        else{System.out.println("Rename specialisation");}
    }

    public static void manual() throws IOException, ClassNotFoundException,
FileNotFoundException, TransformerException, ParserConfigurationException {
        System.out.println("U have chosen manual mode");
        int choose;

        linkedContainer<SecondCreate> linkedContainer = new linkedContainer<>();
        SecondCreate SecondCreate1 = null;

        do{
            System.out.println("Choose action ");
            Scanner in = new Scanner(System.in);
            System.out.println("1. Create new element");
            System.out.println("2. Add elem ");
            System.out.println("3. Clear container ");
            System.out.println("4. Convert to Array ");
            System.out.println("5. Serialize ");
            System.out.println("6. Deserialize ");
            System.out.println("7. Xml serialize");
            System.out.println("8. Xml deserialize");
            choose = in.nextInt();

```

```

        switch (choose) {
            case 1:
                Scanner din = new Scanner(System.in);
                Scanner cin = new Scanner(System.in);
                System.out.println("Enter company name");
                String company = din.nextLine();
                if(company.matches("[a-zA-Z0-9]*")==true)
                {
                    System.out.println("");
                }else{System.out.println("NOT ok RENAME");company =
din.nextLine();}
                System.out.println("Enter specialisation");
                String specialisation=din.nextLine();
                if(specialisation.matches("[0-9]*")==true)
                {
                    System.out.println("ok");
                }else{ System.out.println("NOT ok RENAME"); specialisation =
din.nextLine();}
                System.out.println("Enter working Conditions");
                String workingConditions=din.nextLine();
                System.out.println("Enter payment");
                int payment=cin.nextInt();
                System.out.println("Enter working Experience");
                int workingExperience=cin.nextInt();
                System.out.println("Enter education");
                String education=din.nextLine();
                System.out.println("Enter knowledge of English");
                String English = cin.nextLine();
                System.out.println("Enter driving licence");
                String License = cin.nextLine();
                SecondCreate1 = new
SecondCreate(company,specialisation,workingConditions,payment,workingExperience,educa
tion,License,English);
                break;

            case 2:
                System.out.println(linkedContainer.size());
                linkedContainer.addLast(SecondCreate1);
                System.out.println(linkedContainer.size());

                for(SecondCreate tmp : linkedContainer)
                {
                    System.out.println(tmp);
                }

                break;
            case 3:
                linkedContainer.clean();
                System.out.println(linkedContainer.size());
                break;
            case 4:
                Object []arr = linkedContainer.toArray().toArray();
                for(int i=0; i<linkedContainer.size();i++)
                {
                    System.out.println(arr[i]);
                }
                break;
            case 5:
                ObjectOutputStream objectOutputStream = new
ObjectOutputStream(new FileOutputStream("store.txt"));
                objectOutputStream.writeObject(linkedContainer);
                objectOutputStream.close();

```

```

        break;
    case 6:
        /* ObjectOutputStream objectInputStream = new ObjectOutputStream(new
        FileInputStream("store.txt"));
        linkedContainer<SecondCreate> newContainer =
        (linkedContainer<SecondCreate>)objectInputStream.readObject();

        for (SecondCreate t : newContainer) {
            System.out.println(t);
        }*/

        break;
    case 7:
        /*XmlWrite xmlWrite = new XmlWrite();

        xmlWrite.write(linkedContainer,"XML.xml");*/
        break;
    case 8:
        /*linkedContainer<SecondCreate> newXml = XmlRead.read("XML.xml");

        for(SecondCreate t : newXml )
        {
            System.out.println(t);
        }*/

        break;

    default:
        break;
}}while(choose!=9);

}

    public static void main(String args[]) throws IOException,
    ParserConfigurationException, TransformerException, ClassNotFoundException,
    InterruptedException, ExecutionException, TimeoutException {

        if(args[0].equals("-auto"))
        {

            System.out.println("U chose auto mode.");
            System.out.println("1. Reading from file");
            fileRead();

        }else
        {
            manual();
        }
    }
}

```

SecondCreate.java :

```
import java.io.Serializable;
```



```
public class SecondCreate implements java.lang.Comparable<SecondCreate>, Serializable
{
    private String company;
    private String specialisation;
    private String workingConditions;
    private int payment;
    private int workingExperience;
    private String education;
    private String Licence;
    private String English;

    public SecondCreate(String company,String specialisation,String
workingConditions,int payment,int workingExperience,String education,String
Licence,String English)
    {
        this.company=company;
        this.specialisation=specialisation;
        this.workingConditions=workingConditions;
        this.payment=payment;
        this.workingExperience=workingExperience;
        this.education=education;
        this.Licence=Licence;
        this.English=English;
    }

    public int getPayment()
    {
        return payment;
    }

    public String getSpecialisation()
    {
        return specialisation;
    }

    public String getEducation()
    {
        return education;
    }

    public String getCompany()
    {
        return company;
    }

    public String getWorkingConditions()
    {
        return workingConditions;
    }

    public int getWorkingExperience()
    {
        return workingExperience;
    }

    public String getLicence()
    {
        return Licence;
    }

    public String getEnglish()
```

```

    {
        return English;
    }

    @Override
    public String toString() {
        return "created object{" + "\n" +
            "company name =" + company.toString() + "\n" +
            "specialisation =" + specialisation + "\n" +
            "workingConditions =" + workingConditions + "\n" +
            "payment =" + payment + "\n" +
            "workingExperience =" + workingExperience + "\n" +
            "education =" + education + "\n" +
            "Licence =" + Licence + "\n" +
            "English =" + English + "\n" +
            "}" + "\n";
    }

    @Override
    public int compareTo(SecondCreate o) {
        SecondCreate entry = (SecondCreate) o;

        int tmp = company.compareTo(entry.company);
        // this.payment - ((SecondCreate)o).payment;
        return tmp;
    }
}

```

iLinked.java:

```

package ua.khpi.oop.vasilchenko09.MyList;

import java.io.Serializable;

public interface Linked<T> extends DescendingIterator<T>, Serializable, Iterable<T> {
    void addLast(T obj);
    void addFirst(T obj);
    int size();
    T getElementByIndex(int index);
    void saveAll();
    void saveRec();
    void add(T obj);
    void clear();
    boolean notEmpty();
    void readRec();
    void readAll();
}

```

Threads.java

```

import java.util.concurrent.Callable;

public class Threads {

    public static class MyThread3 implements Callable<Boolean> {
        public static final int HIGHER_PAYMENT = 3000;
        linkedContainer<SecondCreate> linkedContainer;

        @Override
        public Boolean call() throws Exception {
            countHigherPayment();
            return true;
        }
    }
}

```

```

    }

    private void countHigherPayment() throws InterruptedException {
        int count = 0;
        for (int i = 0; i < linkedContainer.size(); i++) {
            Thread.sleep(2);
            if (linkedContainer.getElementByIndex(i).getPayment() >
HIGHER_PAYMENT) {
                count++;
            }
        }
        //System.out.println("Number of vacancies with higher payment: " +
count);
    }

    public void set(linkedContainer<SecondCreate> linkedContainer) {
        this.linkedContainer = linkedContainer;
    }
}

public static class MyThread2 implements Callable<Boolean> {
    linkedContainer<SecondCreate> linkedContainer;

    private void sumAvgPayment() throws InterruptedException {
        long sum = 0;
        long avg = 0;
        for (int i = 0; i < linkedContainer.size(); i++) {
            // Thread.sleep(2);
            sum += linkedContainer.getElementByIndex(i).getPayment();
        }
        avg = sum / linkedContainer.size();
        System.out.println("Sum payment = " + sum);
        System.out.println("Avg payment = " + avg);
    }

    public void set(linkedContainer<SecondCreate> linkedContainer) {
        this.linkedContainer = linkedContainer;
    }

    @Override
    public Boolean call() throws Exception {
        sumAvgPayment();
        return true;
    }
}

public static class MyTread1 implements Callable<Boolean> {

    linkedContainer<SecondCreate> linkedContainer;

    public void set(linkedContainer<SecondCreate> linkedContainer) {
        this.linkedContainer = linkedContainer;
        //System.out.println(linkedContainer.size());
    }

    @Override
    public Boolean call() throws Exception {
        run();
        return true;
    }
}

```

```

        public void run() throws InterruptedException {

            int max = linkedContainer.getElementByIndex(0).getPayment();
            int min = linkedContainer.getElementByIndex(0).getPayment();
            for (int i = 0; i < linkedContainer.size(); i++) {
                //Thread.sleep(10);
                if (linkedContainer.getElementByIndex(i).getPayment() < min) {
                    min = linkedContainer.getElementByIndex(i).getPayment();
                }
                if (linkedContainer.getElementByIndex(i).getPayment() > max) {
                    max = linkedContainer.getElementByIndex(i).getPayment();
                }
            }
            System.out.println("Max payment = " + max + "$");
            System.out.println("Min payment = " + min + "$");
        }

    }

    /* linkedContainer<SecondCreate> linkedContainer;

    public Threads(linkedContainer<SecondCreate> linkedContainer)
    {
        this.linkedContainer = linkedContainer;
    }

    @Override
    public void run() {

        int max = linkedContainer.getElementByIndex(0).getPayment();
        int min = linkedContainer.getElementByIndex(0).getPayment();
        for (int i = 0; i < linkedContainer.size(); i++) {
            if (linkedContainer.getElementByIndex(i).getPayment() < min) {
                min = linkedContainer.getElementByIndex(i).getPayment();
            }
            if (linkedContainer.getElementByIndex(i).getPayment() > max) {
                max = linkedContainer.getElementByIndex(i).getPayment();
            }
        }
        System.out.println("Max payment = " + max+"$");
        System.out.println("Min payment = " + min+"$");
    }*/
}

```

SecondThread.java

```

public class SecondThead implements Runnable {

    linkedContainer<SecondCreate> linkedContainer;

    public SecondThead(linkedContainer<SecondCreate> linkedContainer)
    {
        this.linkedContainer = linkedContainer;
    }
}

```

```

@Override
public void run() {
    int sum = 0;
    int avg = 0;
    for (int i = 0; i < linkedContainer.size(); i++) {
        sum += linkedContainer.getElementByIndex(i).getPayment();
    }
    avg = sum / linkedContainer.size();
    System.out.println("Sum payment = " + sum);
    System.out.println("Avg payment = " + avg);
}
}

```

ВАРІАНТИ ВИКОРИСТАННЯ

```

PS C:\Users\vodo1\IdeaProjects\lab10\src> javac Main.java
PS C:\Users\vodo1\IdeaProjects\lab10\src> java Main -auto
U chose auto mode.
1. Reading from file
OK
OK
Container size
1
Created worker
created object{
company name =nix
specialisation =123
workingConditions =10-19.00
payment =1000
workingExperience =0
education =bachelor
Licence = yes
English =yes
}
PS C:\Users\vodo1\IdeaProjects\lab10\src>

```

Рис. 13.1 – Результат роботи програми

Після строки Reading from file йдуть дві строки з написом ОК це означає, що введені данні були перевірені і підпадають під дозволені.

```

Windows PowerShell
PS C:\Users\vodo1\IdeaProjects\test1\src> java Main -manual
U have chosen manual mode
Choose action
1. Create new element
2. Add elem
3. Clear container
4. Convert to Array
5. Serialize
6. Deserialize
7. Xml serialize
8. Xml deserialize
1
Enter company name
3454fdvdv'/'
NOT ok RENAME

```

Рис . 13.2 – Результат роботи програми

Як видно зі скріншоту ім'я було введено не вірно і програма запросила ввести ім'я програми знову. Так само є перевірка введення спеціалізації.

```

PS C:\Users\vodo1\IdeaProjects\lab10\src> javac Main.java
PS C:\Users\vodo1\IdeaProjects\lab10\src> java Main -manual
U have chosen manual mode
Choose action
1. Create new element
2. Add elem
3. Clear container
4. Convert to Array
5. Serialize
6. Deserialize
7. Xml serialize
8. Xml deserialize
1
Enter company name
er
Enter specialisation
456
ok
Enter working Conditions
567
Enter payment
678
Enter working Experience
967
Enter education
5454
Enter knowledge of English
Enter driving licence
78
Choose action
1. Create new element
2. Add elem
3. Clear container
4. Convert to Array
5. Serialize
6. Deserialize
7. Xml serialize
8. Xml deserialize
2
0
1
created object{
company name =er
specialisation =456
workingConditions =567
payment =678

```

Рис. 13.3 – Результат роботи програми

```

PS C:\Users\vodo1\IdeaProjects\lab10\src> javac Main.java
PS C:\Users\vodo1\IdeaProjects\lab10\src> java Main -auto
U chose auto mode.
1. Reading from file
OK
OK
PS C:\Users\vodo1\IdeaProjects\lab10\src> javac Main.java
PS C:\Users\vodo1\IdeaProjects\lab10\src> java Main -auto
U chose auto mode.
1. Reading from file
OK
OK
OK
created object{
company name =globalLogic
specialisation =teacher
workingConditions =10.00-19.00
payment =300
workingExperience =11
education =magistry
Licence = yes
English =yes
}
PS C:\Users\vodo1\IdeaProjects\lab10\src>

```

Рисунок 13.4 – Пошук елементів які задовольняють заданій умові
(Спеціальність – вчитель, з володінням англійською мовою та володінням
автомобілем.

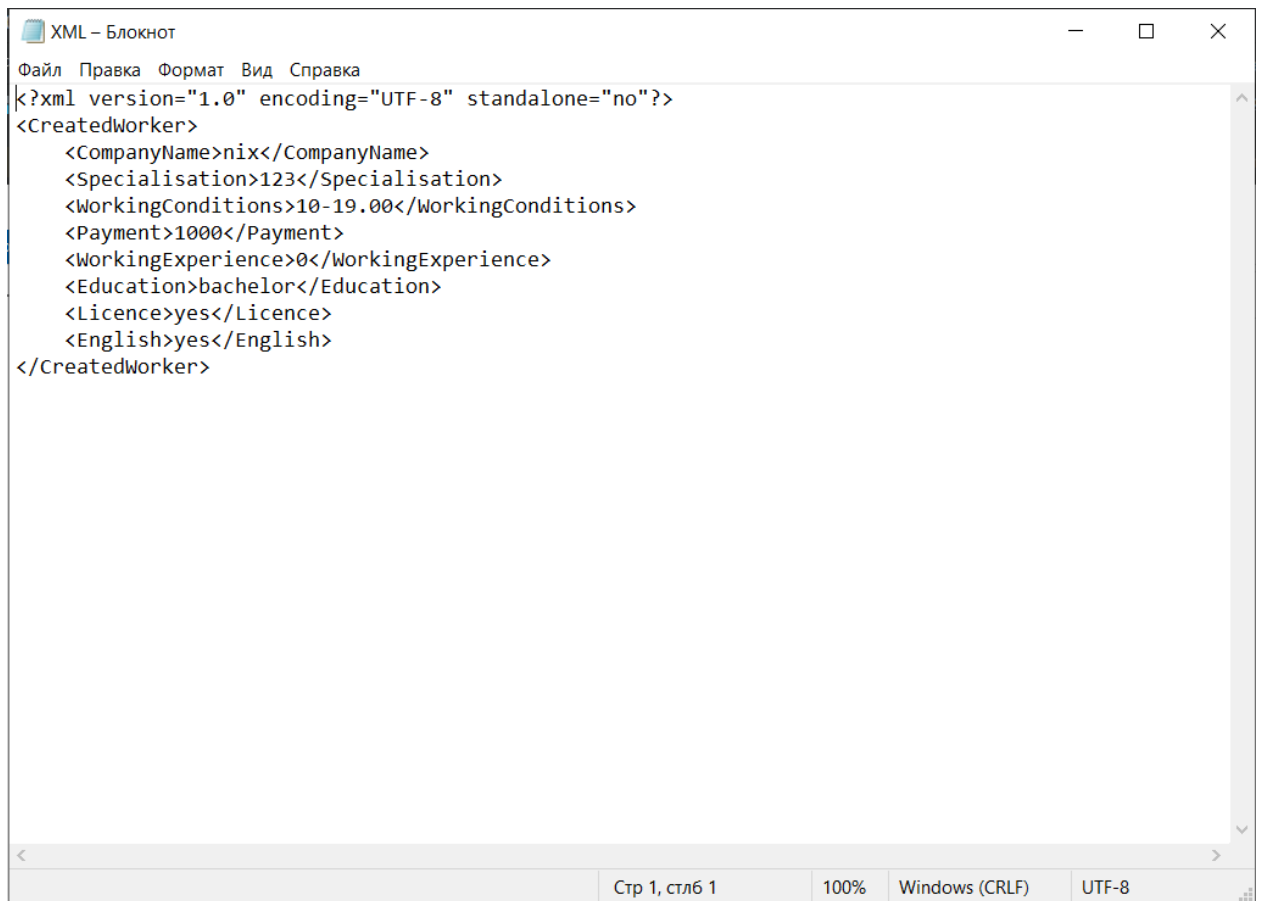


Рис. 13.5 – Результат роботи програми

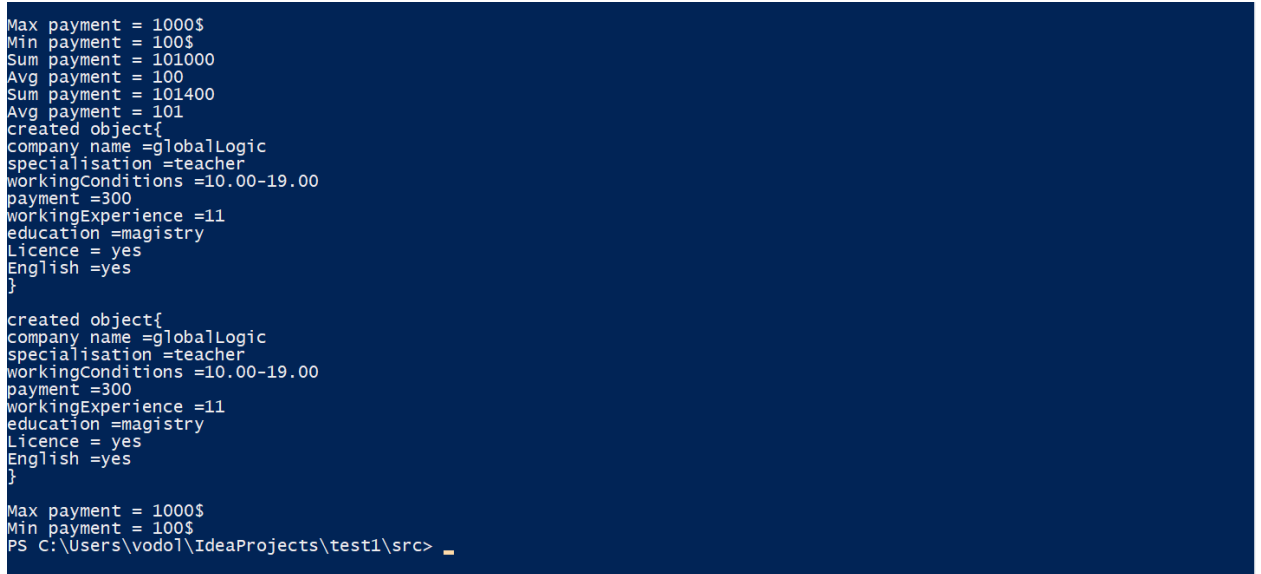


Рис 13.6 – Виконання роботи 3 додаткових потоків.



Рис 13.7 – Результат роботи програми змінився, адже швидкість роботи потоку була обмежена 2 секундами, а у циклі пошуку елементів

задовольняючих умовам була встановлена штучна затримка 2 секунди, тому виконалися лише ті потоки, які були без обмеження по часу виконання.

Програму можна використовувати задля створення бази даних. Завдяки параметризації зв'язного списку, базу даних можна використати для будь-яких типів даних. Переважно у нашому варіанті - кадрове агенство, в якому представляються різноманітні вакансії. Також для вибору доступно багато інших можливостей. Реалізовано меню для поліпшення користування програмою.

ВИСНОВКИ

При виконанні лабораторної роботи набуто практичних навичок щодо розробки параметризованих класів. Завдяки цієї можливості в JAVA, можливо створювати колекції та інші класи на основі будь-яких типів. Також навчився обробляти параметризовані контейнери. Завдання виконане! Програма працює успішно!