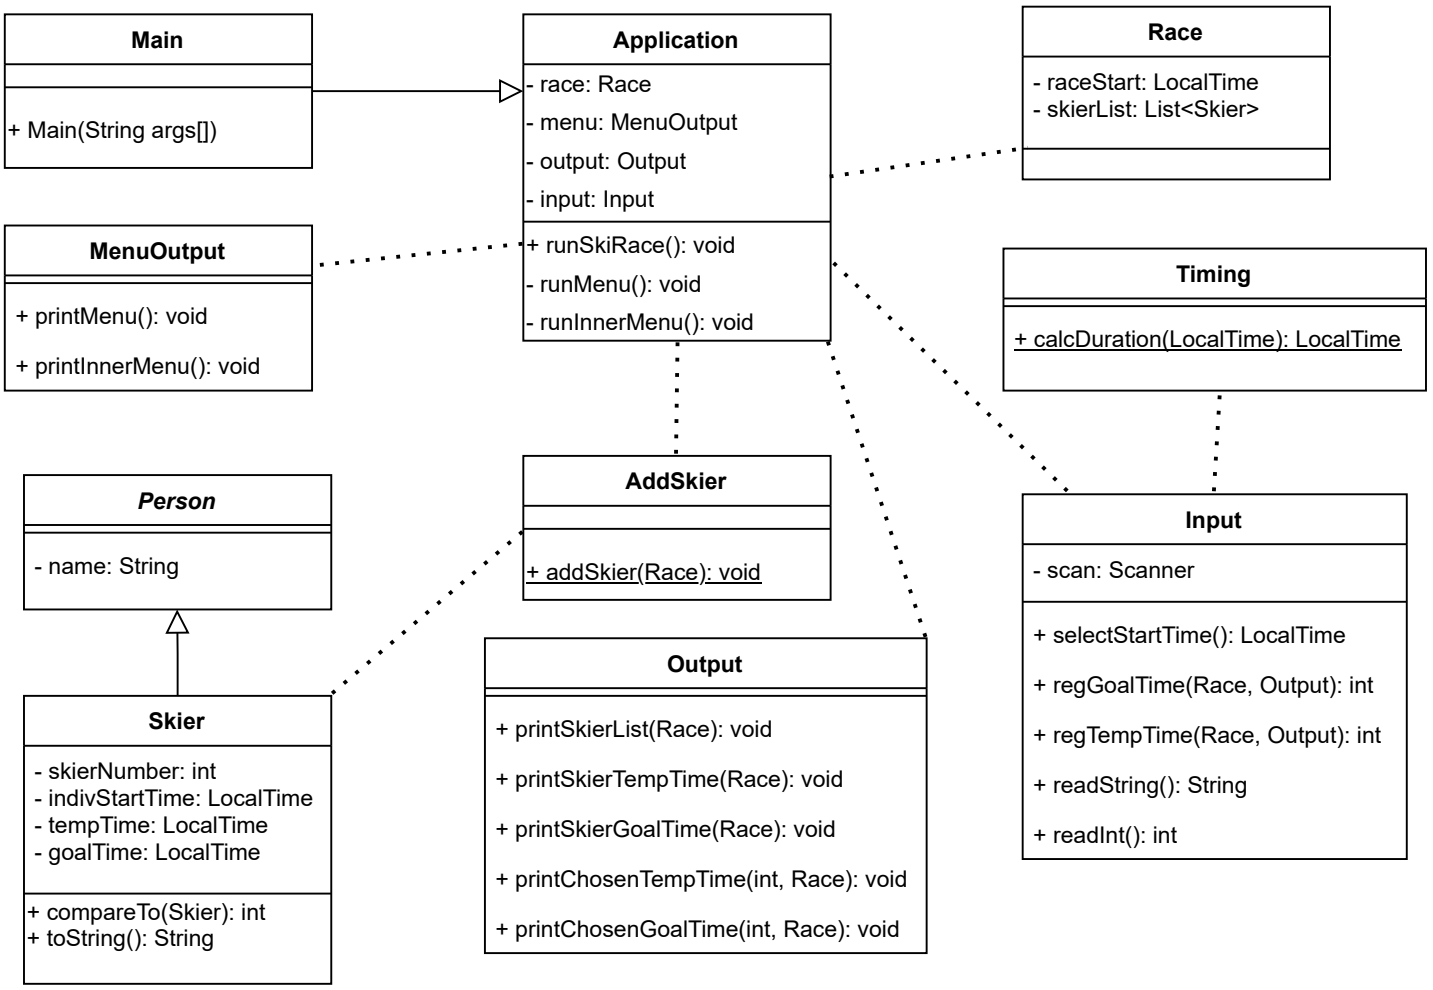
Main
+ Main(String args[])
Application
- race: Race
- menu: MenuOutput
- output: Output
- input: Input
+ runSkiRace(): void
- runMenu(): void
- runInnerMenu(): void
Race
- raceStart: LocalTime
- skierList: List<Skier>
MenuOutput
+ printMenu(): void
+ printInnerMenu(): void
Timing
+ calcDuration(LocalTime): LocalTime
Person
- name: String
AddSkier
+ addSkier(Race): void
Input
- scan: Scanner
+ selectStartTime(): LocalTime
+ regGoalTime(Race, Output): int
+ regTempTime(Race, Output): int
+ readString(): String
+ readInt(): int
Skier
- skierNumber: int
- indivStartTime: LocalTime
- tempTime: LocalTime
- goalTime: LocalTime
+ compareTo(Skier): int
+ toString(): String
Output
+ printSkierList(Race): void
+ printSkierTempTime(Race): void
+ printSkierGoalTime(Race): void
+ printChosenTempTime(int, Race): void
+ printChosenGoalTime(int, Race): void