
Security Review Report

NM-0956-Mellow



NETHERMIND
SECURITY

(Jun 17, 2026)

Contents

1	Executive Summary	2
2	Audited Files	3
3	Summary of Issues	3
4	System Overview	4
4.1	Configuration	4
4.2	Invariants Enforced by <code>callHook</code>	4
4.3	Design Assumptions	4
4.4	Deposit-and-Forward	4
5	Risk Rating Methodology	5
6	Documentation Evaluation	6
7	Test Suite Evaluation	7
8	About Nethermind	8

1 Executive Summary

This document presents the results of the security review conducted by [Nethermind Security](#) for Mellow's TransferDepositHook.

TransferDepositHook is a single-purpose deposit hook whose role is to automatically forward newly deposited vault assets to a designated subvault. Rather than leaving deposited funds idle in the vault waiting for a separate keeper transaction to push them into a strategy, the hook executes inline with the deposit.

The audit comprises 62 lines of Solidity code. The audit was performed using (a) manual analysis of the codebase, and (b) automated analysis tools. **Along this document, we report** no points of attention, as shown in Fig. 1.

This document is organized as follows. Section 2 presents the files in the scope. Section 3 summarizes the issues. Section 4 presents the system overview. Section 5 discusses the risk rating methodology. Section 6 discusses the documentation provided by the client for this audit. Section 7 presents the compilation, tests, and automated tests. Section 8 concludes the document.

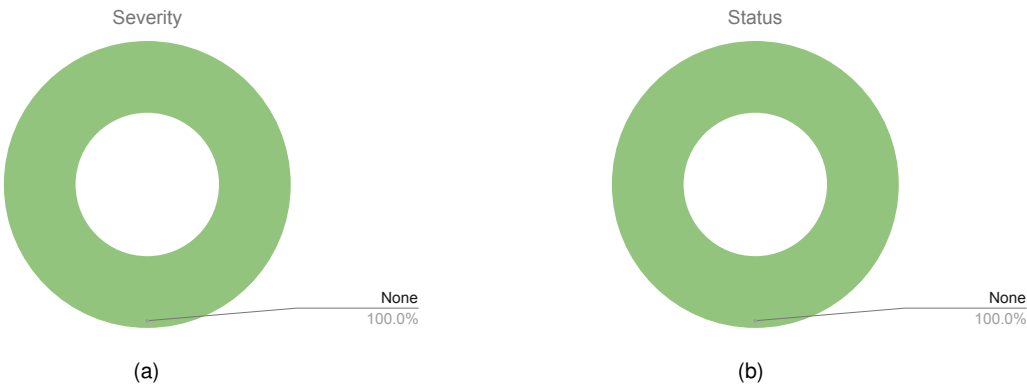


Fig. 1: Distribution of issues: Critical (0), High (0), Medium (0), Low (0), Undetermined (0), Informational (0), Best Practices (0).
Distribution of status: Fixed (0), Acknowledged (0), Mitigated (0), Unresolved (0)

Summary of the Audit

Audit Type	Security Review
Initial Report	June 16, 2026
Final Report	June 16, 2026
Initial Commit	2a44622
Final Commit	2a44622
Documentation Assessment	High
Test Suite Assessment	Low

2 Audited Files

	Contract	LoC	Comments	Ratio	Blank	Total
1	TransferDepositHook.sol	52	2	3%	9	63
	Total	52	2	3%	9	63

3 Summary of Issues

No issues were identified during the review.

4 System Overview

TransferDepositHook is an IHook implementation intended to be executed from a Vault immediately after a deposit has been processed.

The hook routes newly deposited assets out of the vault, through a designated subvault, and then to a fixed external recipient. This consolidates what would otherwise be a multi-step flow (deposit into the vault, push assets to a subvault, and transfer assets to a strategy or recipient) into a single atomic operation.

4.1 Configuration

All routing parameters are immutable and set during construction:

- **asset** — the only ERC-20 token the hook is permitted to forward. Calls involving any other asset revert with `InvalidAsset`.
- **vault** — the `IVaultModule`, meaning the Vault, whose storage context the hook must execute within.
- **subvault** — the intermediary subvault through which assets are routed. The subvault must remain connected to the vault.
- **to** — the final recipient address that receives the assets via `IERC20.transfer`.
- **_this** — the deployed address of the hook contract itself, captured to enforce `delegatecall`-only execution.

4.2 Invariants Enforced by `callHook`

`callHook(address asset_, uint256 assets_)` is the hook's only entry point. Before performing any asset movement, it enforces the following conditions:

- a. **Delegatecall-only execution:** `address(this) != _this`. The hook refuses to execute when called directly on the deployed hook contract, reverting with `OnlyDelegateCall`.
- b. **Correct vault context:** `address(this) == address(vault)`. The `delegatecall` must originate from the configured vault, otherwise the call reverts with `InvalidVault`.
- c. **Correct asset:** `asset_ == asset`. Only the configured ERC-20 asset is supported. Any other asset causes the call to revert with `InvalidAsset`.
- d. **Connected subvault:** `vault.hasSubvault(subvault)`. The configured subvault must still be part of the vault's subvault set. If not, the call reverts with `UnsupportedSubvault`.
- e. **Zero-amount no-op:** `assets_ == 0`. If the asset amount is zero, the hook returns without modifying state or making external calls.

4.3 Design Assumptions

Assets transit through the subvault within a single transaction. The subvault's role is to provide a permissioned execution surface: the Verifier enforces which calls are authorized, preventing arbitrary disposal of the subvault's balance. No intermediate state exists in which the subvault holds assets between `hookPushAssets` and the `IERC20.transfer` call.

Verification is static. The hook passes a zero-initialized `VerificationPayload` to `subvault.call()`. Since `VerificationType(0)` resolves to `ONCHAIN_COMPACT`, the verifier checks only whether the tuple (`caller`, `target`, `selector`) matches a pre-registered entry in the allowlist, no additional data or proof is required at call time. Authorization is therefore fully determined at configuration time.

4.4 Deposit-and-Forward

The hook implements a deposit-and-forward pipeline. Because it executes via `delegatecall`, `address(this)` resolves to the vault address. Similarly, `_msgSender()` inside calls back into the vault also resolves to the vault address, which is the condition expected by `VaultModule.hookPushAssets`. The end-to-end deposit flow is as follows:

- a. **User deposits into the vault** The user deposits through the deposit queue on a Vault. Once the batch is processed at oracle report time, the vault invokes the configured deposit hook via `delegatecall`, entering `callHook`.
- b. **Assets are pushed from the vault to the subvault** The hook calls `vault.hookPushAssets(subvault, asset, assets_)`. Inside `VaultModule._pushAssets`, this performs the following actions:
 - Updates risk accounting by calling `riskManager().modifySubvaultBalance(subvault, asset, assets_)`.
 - Transfers the tokens from the vault to the subvault via `TransferLibrary.sendAssets`.
- c. **Assets are forwarded from the subvault to the final recipient** The hook instructs the subvault to execute an ERC-20 transfer to `to` address. The subvault's `call` mechanism is responsible for dispatching the authorised external interaction.
- d. **Transfer return data is validated** ERC-20 implementations are inconsistent in their return behaviour: some return no data, while others return a boolean. The hook accepts both cases, reverting with `InvalidResponse` only if the return data is neither empty nor a true boolean.

5 Risk Rating Methodology

The risk rating methodology used by [Nethermind Security](#) follows the principles established by the [OWASP Foundation](#). The severity of each finding is determined by two factors: **Likelihood** and **Impact**.

Likelihood measures how likely the finding is to be uncovered and exploited by an attacker. This factor will be one of the following values:

- a) **High**: The issue is trivial to exploit and has no specific conditions that need to be met;
- b) **Medium**: The issue is moderately complex and may have some conditions that need to be met;
- c) **Low**: The issue is very complex and requires very specific conditions to be met.

When defining the likelihood of a finding, other factors are also considered. These can include but are not limited to motive, opportunity, exploit accessibility, ease of discovery, and ease of exploit.

Impact is a measure of the damage that may be caused if an attacker exploits the finding. This factor will be one of the following values:

- a) **High**: The issue can cause significant damage, such as loss of funds or the protocol entering an unrecoverable state;
- b) **Medium**: The issue can cause moderate damage, such as impacts that only affect a small group of users or only a particular part of the protocol;
- c) **Low**: The issue can cause little to no damage, such as bugs that are easily recoverable or cause unexpected interactions that cause minor inconveniences.

When defining the impact of a finding, other factors are also considered. These can include but are not limited to Data/state integrity, loss of availability, financial loss, and reputation damage. After defining the likelihood and impact of an issue, the severity can be determined according to the table below.

		Severity Risk		
Impact	High	Medium	High	Critical
	Medium	Low	Medium	High
	Low	Info/Best Practices	Low	Medium
	Undetermined	Undetermined	Undetermined	Undetermined
		Low	Medium	High
		Likelihood		

To address issues that do not fit a High/Medium/Low severity, [Nethermind Security](#) also uses three more finding severities: **Informational**, **Best Practices**, and **Undetermined**.

- a) **Informational** findings do not pose any risk to the application, but they carry some information that the audit team intends to pass to the client formally;
- b) **Best Practice** findings are used when some piece of code does not conform with smart contract development best practices;
- c) **Undetermined** findings are used when we cannot predict the impact or likelihood of the issue.

6 Documentation Evaluation

Software documentation refers to the written or visual information that describes the functionality, architecture, design, and implementation of software. It provides a comprehensive overview of the software system and helps users, developers, and stakeholders understand how the software works, how to use it, and how to maintain it. Software documentation can take different forms, such as user manuals, system manuals, technical specifications, requirements documents, design documents, and code comments. Software documentation is critical in software development, enabling effective communication between developers, testers, users, and other stakeholders. It helps to ensure that everyone involved in the development process has a shared understanding of the software system and its functionality. Moreover, software documentation can improve software maintenance by providing a clear and complete understanding of the software system, making it easier for developers to maintain, modify, and update the software over time. Smart contracts can use various types of software documentation. Some of the most common types include:

- Technical whitepaper: A technical whitepaper is a comprehensive document describing the smart contract's design and technical details. It includes information about the purpose of the contract, its architecture, its components, and how they interact with each other;
- User manual: A user manual is a document that provides information about how to use the smart contract. It includes step-by-step instructions on how to perform various tasks and explains the different features and functionalities of the contract;
- Code documentation: Code documentation is a document that provides details about the code of the smart contract. It includes information about the functions, variables, and classes used in the code, as well as explanations of how they work;
- API documentation: API documentation is a document that provides information about the API (Application Programming Interface) of the smart contract. It includes details about the methods, parameters, and responses that can be used to interact with the contract;
- Testing documentation: Testing documentation is a document that provides information about how the smart contract was tested. It includes details about the test cases that were used, the results of the tests, and any issues that were identified during testing;
- Audit documentation: Audit documentation includes reports, notes, and other materials related to the security audit of the smart contract. This type of documentation is critical in ensuring that the smart contract is secure and free from vulnerabilities.

These types of documentation are essential for smart contract development and maintenance. They help ensure that the contract is properly designed, implemented, and tested, and they provide a reference for developers who need to modify or maintain the contract in the future.

Remarks about Mellow's contracts documentation

The development team provided an overview of the system, its architecture and flows. The team was collaborative during the audit, providing answers to questions raised by the Nethermind Security team through asynchronous communications.

7 Test Suite Evaluation

There are no tests.

8 About Nethermind

Nethermind is a Blockchain Research and Software Engineering company. Our work touches every part of the web3 ecosystem - from layer 1 and layer 2 engineering, cryptography research, and security to application-layer protocol development. We offer strategic support to our institutional and enterprise partners across the blockchain, digital assets, and DeFi sectors, guiding them through all stages of the research and development process, from initial concepts to successful implementation.

We offer security audits of projects built on EVM-compatible chains and Starknet. We are active builders of the Starknet ecosystem, delivering a node implementation, a block explorer, a Solidity-to-Cairo transpiler, and formal verification tooling. Nethermind also provides strategic support to our institutional and enterprise partners in blockchain, digital assets, and decentralized finance (DeFi). In the next paragraphs, we introduce the company in more detail.

Blockchain Security: At Nethermind, we believe security is vital to the health and longevity of the entire Web3 ecosystem. We provide security services related to Smart Contract Audits, Formal Verification, and Real-Time Monitoring. Our Security Team comprises blockchain security experts in each field, often collaborating to produce comprehensive and robust security solutions. The team has a strong academic background, can apply state-of-the-art techniques, and is experienced in analyzing cutting-edge Solidity and Cairo smart contracts, such as ArgentX and StarkGate (the bridge connecting Ethereum and StarkNet). Most team members hold a Ph.D. degree and actively participate in the research community, accounting for 240+ articles published and 1,450+ citations in Google Scholar. The security team adopts customer-oriented and interactive processes where clients are involved in all stages of the work.

Blockchain Core Development: Our core engineering team, consisting of over 20 developers, maintains, improves, and upgrades our flagship product - the Nethermind Ethereum Execution Client. The client has been successfully operating for several years, supporting both the Ethereum Mainnet and its testnets, and now accounts for nearly a quarter of all synced Mainnet nodes. Our unwavering commitment to Ethereum's growth and stability extends to sidechains and layer 2 solutions. Notably, we were the sole execution layer client to facilitate Gnosis Chain's Merge, transitioning from Aura to Proof of Stake (PoS), and we are actively developing a full-node client to bolster Starknet's decentralization efforts. Our core team equips partners with tools for seamless node set-up, using generated docker-compose scripts tailored to their chosen execution client and preferred configurations for various network types.

DevOps and Infrastructure Management: Our infrastructure team ensures our partners' systems operate securely, reliably, and efficiently. We provide infrastructure design, deployment, monitoring, maintenance, and troubleshooting support, allowing you to focus on your core business operations. Boasting extensive expertise in Blockchain as a Service, private blockchain implementations, and node management, our infrastructure and DevOps engineers are proficient with major cloud solution providers and can host applications in-house or on clients' premises. Our global in-house SRE teams offer 24/7 monitoring and alerts for both infrastructure and application levels. We manage over 5,000 public and private validators and maintain nodes on major public blockchains such as Polygon, Gnosis, Solana, Cosmos, Near, Avalanche, Polkadot, Aptos, and StarkWare L2. Sedge is an open-source tool developed by our infrastructure experts, designed to simplify the complex process of setting up a proof-of-stake (PoS) network or chain validator. Sedge generates docker-compose scripts for the entire validator set-up based on the chosen client, making the process easier and quicker while following best practices to avoid downtime and being slashed.

Cryptography Research: At Nethermind, our cryptography Research team conducts cutting-edge internal research and collaborates closely with external partners on cryptographic protocols, consensus design, succinct arguments and folding schemes, elliptic curve-based STARK protocols, post-quantum security and zero-knowledge proofs (ZKPs). Our research has led to influential contributions, including Zinc (Crypto '25), Mova, FLI (Asiacrypt '24), and foundational results in Fiat-Shamir security and STARK proof batching. Complementing this theoretical work, our engineering expertise is demonstrated through implementations such as the Latticefold aggregation scheme, the Labrador proof system, zkvm-benchmarks, and Plonk Verifier in Cairo. This combined strength in theory and engineering enables us to deliver cutting-edge cryptographic solutions to partners and clients.

Smart Contract Development & DeFi Research: Our smart contract development and DeFi research team comprises 40+ world-class engineers who collaborate closely with partners to identify needs and work on value-adding projects. The team specializes in Solidity and Cairo development, architecture design, and DeFi solutions, including DEXs, AMMs, structured products, derivatives, and money market protocols, as well as ERC20, 721, and 1155 token design. Our research and data analytics focuses on three key areas: technical due diligence, market research, and DeFi research. Utilizing a data-driven approach, we offer in-depth insights and outlooks on various industry themes.

Our suite of L2 tooling: Warp is Starknet's approach to EVM compatibility. It allows developers to take their Solidity smart contracts and transpile them to Cairo, Starknet's smart contract language. In the short time since its inception, the project has accomplished many achievements, including successfully transpiling Uniswap v3 onto Starknet using Warp.

- **Voyager** is a user-friendly Starknet block explorer that offers comprehensive insights into the Starknet network. With its intuitive interface and powerful features, Voyager allows users to easily search for and examine transactions, addresses, and contract details. As an essential tool for navigating the Starknet ecosystem, Voyager is the go-to solution for users seeking in-depth information and analysis;
- **Horus** is an open-source formal verification tool for StarkNet smart contracts. It simplifies the process of formally verifying Starknet smart contracts, allowing developers to express various assertions about the behavior of their code using a simple assertion language;
- **Juno** is a full-node client implementation for Starknet, drawing on the expertise gained from developing the Nethermind Client. Written in Golang and open-sourced from the outset, Juno verifies the validity of the data received from Starknet by comparing it to proofs retrieved from Ethereum, thus maintaining the integrity and security of the entire ecosystem.

General Advisory to Clients

As auditors, we recommend that any changes or updates made to the audited codebase undergo a re-audit or security review to address potential vulnerabilities or risks introduced by the modifications. By conducting a re-audit or security review of the modified codebase, you can significantly enhance the overall security of your system and reduce the likelihood of exploitation. However, we do not possess the authority or right to impose obligations or restrictions on our clients regarding codebase updates, modifications, or subsequent audits. Accordingly, the decision to seek a re-audit or security review lies solely with you.

Disclaimer

This report is based on the scope of materials and documentation provided by you to [Nethermind](#) in order that [Nethermind](#) could conduct the security review outlined in **1. Executive Summary** and **2. Audited Files**. The results set out in this report may not be complete nor inclusive of all vulnerabilities. [Nethermind](#) has provided the review and this report on an as-is, where-is, and as-available basis. You agree that your access and/or use, including but not limited to any associated services, products, protocols, platforms, content, and materials, will be at your sole risk. Blockchain technology remains under development and is subject to unknown risks and flaws. The review does not extend to the compiler layer, or any other areas beyond the programming language, or other programming aspects that could present security risks. This report does not indicate the endorsement of any particular project or team, nor guarantee its security. No third party should rely on this report in any way, including for the purpose of making any decisions to buy or sell a product, service or any other asset. To the fullest extent permitted by law, [Nethermind](#) disclaims any liability in connection with this report, its content, and any related services and products and your use thereof, including, without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement. [Nethermind](#) does not warrant, endorse, guarantee, or assume responsibility for any product or service advertised or offered by a third party through the product, any open source or third-party software, code, libraries, materials, or information linked to, called by, referenced by or accessible through the report, its content, and the related services and products, any hyperlinked websites, any websites or mobile applications appearing on any advertising, and [Nethermind](#) will not be a party to or in any way be responsible for monitoring any transaction between you and any third-party providers of products or services. As with the purchase or use of a product or service through any medium or in any environment, you should use your best judgment and exercise caution where appropriate. FOR AVOIDANCE OF DOUBT, THE REPORT, ITS CONTENT, ACCESS, AND/OR USAGE THEREOF, INCLUDING ANY ASSOCIATED SERVICES OR MATERIALS, SHALL NOT BE CONSIDERED OR RELIED UPON AS ANY FORM OF FINANCIAL, INVESTMENT, TAX, LEGAL, REGULATORY, OR OTHER ADVICE.