


32(8'). 补充下列 Java 程序使得改程序能够利用 JDBC 链接 MySQL 数据库，并对数据库中数据进行修改。

```
import java.sql.*;
public class Main {
    private static Connection con = null;
    private static String database = "mydb";
    private static String user = "root";
    private static String pwd = "root";
    private static String uri = null;
    private static Statement st = null;
    public static void main(String[] args) {
        // 连接数据库
        uri = "jdbc:mysql://127.0.0.1:3306/" + database + "? useSSL=true";
        try {
            Class.forName("com.mysql.jdbc.Driver"); //loading mysql jdbc
            con = DriverManager.getConnection(uri, user, pwd); //连接数据库代码
            System.out.println("连接成功");
            String sql = "update mytable set affiliation='计算机学院' where id=4 ";
            int res = -1;
            Statement st = con.createStatement(); //创建 statement
            res = st.executeUpdate(sql); //执行 sql 并返回结果
            System.out.println("表中有" + res + "行受影响");
            st.close();
            con.close(); //关闭 Connection
        } catch (ClassNotFoundException | SQLException ex) {
            ex.printStackTrace();
        }
    }
}
```

29(5'). 列出下列窗口除去 JFrame 及 JPanel 外的任意五种组件。

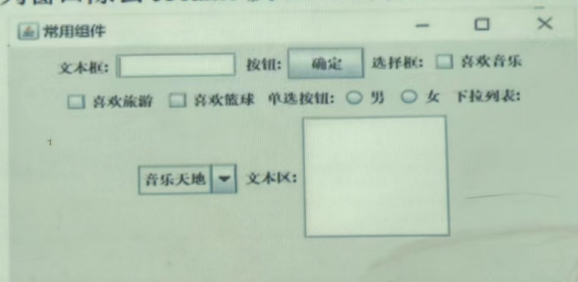

WindowActionEvent.java 部分
import java.awt.*;

```
public class Application {
    public static void main(String args[]) {
        Simulator simulator=new Simulator();
        simulator.playSound(new Dog());
        simulator.playSound(new Cat());
    }
}
```