

Lab for Software Engineering

Cinema Management Application

Ifrat Jahan (3098878)
Jennifer Maxisch (3106694)
Georgios Adamos (3093306)
Thomas Klimek (3067855)
Melvin van der Linde (3106762)

December 12, 2022

9.5

Contents

1	Analysis	iv
1.1	A1	iv
1.1.1	Requirements & Domain-Knowledge	iv
1.1.2	Contextdiagram	v
1.2	A2	vi
1.3	A3	ix
1.4	A4	xiii
1.5	A5	xiv
1.5.1	RegisterCustomer	xiv
1.5.2	NonStaffUserBrowse	xv
1.6	A6	xvii
2	Design	xviii
2.1	D1	xviii
2.2	D2	xviii
2.3	D3	xviii
2.4	D4	xviii
3	Implementation & Testing	xix
3.1	I	xix
3.2	T1	xix
3.3	T2	xix
3.4	T3	xix
4	Glossary	xx

List of Figures

1.1	Contextdiagram	v
1.2	Problem diagram for R1	vi
1.3	Mapping diagram for R1	vi
1.4	Problem diagram for R5	vi
1.5	Mapping diagram for R5	vi
1.6	Problem diagram for R4 / R8	vii
1.7	Mapping diagram for R4 / R8	vii
1.8	Problem diagram for R7	viii
1.9	Mapping diagram for R7	viii
1.10	Sequence diagram for R1	ix
1.11	Sequence diagram for R5	x
1.12	Sequence diagram for R4/R8	xi
1.13	Sequence diagram for R7	xi
1.14	Technical Context Diagram	xiii
1.15	Mapping Diagram of the TCD	xiii
1.16	Class model of the operation RegisterCustomer	xiv
1.17	Class model of the operation NonStaffUserBrowse	xv
2.1	Zustandsdiagramm Person 1	xviii

1 Analysis

1.1 A1

1.1.1 Requirements & Domain-Knowledge

Requirements

- R1 Customers can create an account by providing an e-mail address and a password. If an e-mail address which is already associated with an account is provided, account creation fails.
- R2 Customers can log in by providing their e-mail address and their password.
- R3 A logged in customer can log out.
- R4 A customer can browse available showings, ascendingly sorted by date.
- R5 A logged in customer can book tickets by selecting the showing from the browsing list and selecting the desired seats. A showing can only be booked up to 15 minutes before it starts.
- R6 Staff can add new showings to the database by providing the required data.
- R7 Once a showing starts it is marked as “archived”.
- R8 Archived showings are visible to staff, but not to customers.
- R9 Staff can cancel showings. When a show is cancelled all customers who booked tickets for it are notified via e-mail and the showing is then deleted.
- R10 Showings which took place a year ago or longer are automatically removed from the database.
- R11 When a showing is deleted its associated bookings are also deleted.

Facts

- F1 A showing consists of the title of the movie, its duration, the date date, the hall number and unique ID.
- F2 A hall consists of a number of rows, a number of seats per row and a unique hall number.
- F3 Only one person at a time can sit in a seat.

Assumptions

- A1 A web application is a good choice for implementing the desired functionality and all customers are able to use it.
- A2 Customers only provide e-mail addresses they can access.
- A3 Customers will stay up to date with the list of available showings.
- A4 Every booking is paid via an external service.
- A5 Staff will only add showings which take place in the future.

1.1.2 Contextdiagram

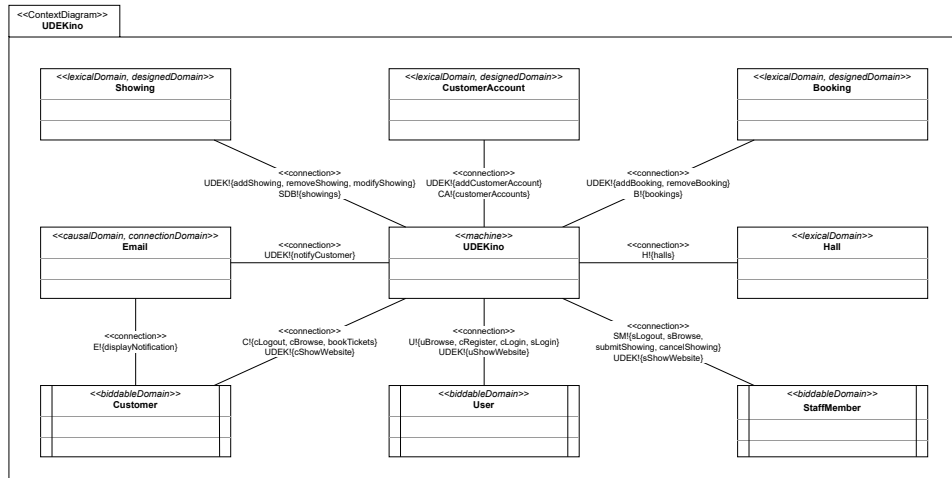


Figure 1.1: Contextdiagram

1.2 A2

We can derive the following problem diagrams

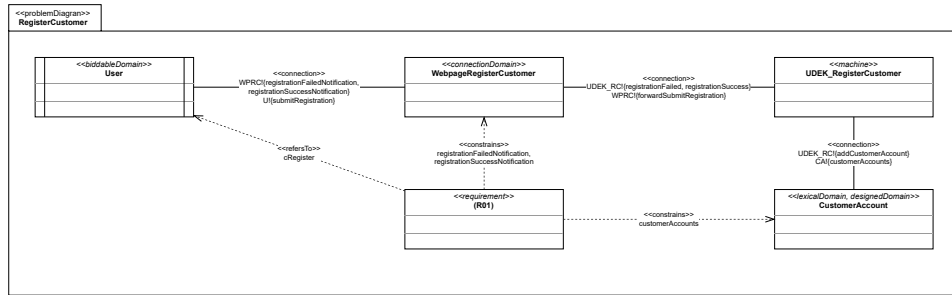


Figure 1.2: Problem diagram for R1

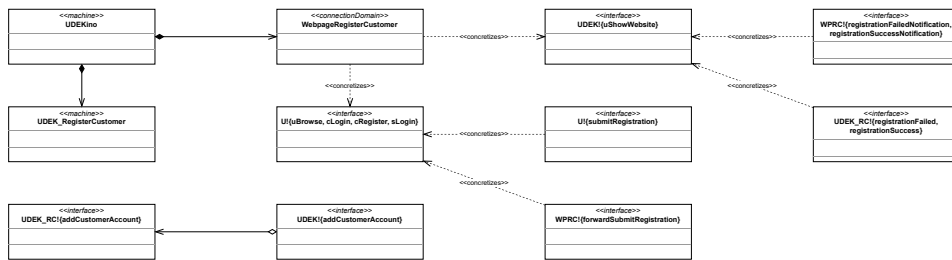


Figure 1.3: Mapping diagram for R1

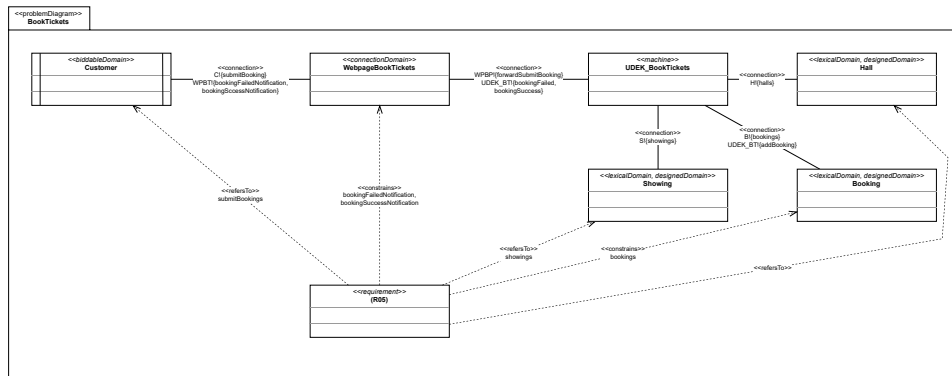


Figure 1.4: Problem diagram for R5

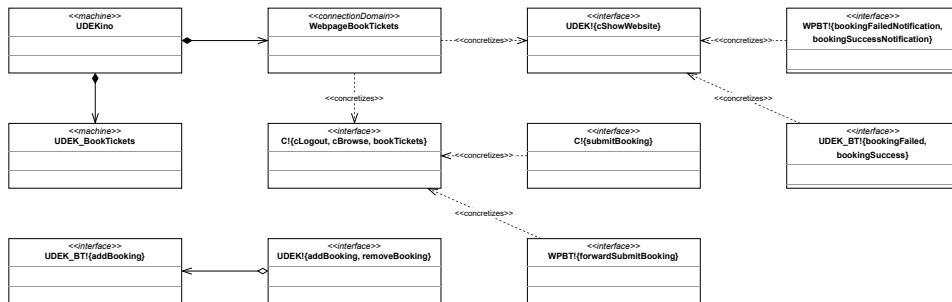


Figure 1.5: Mapping diagram for R5

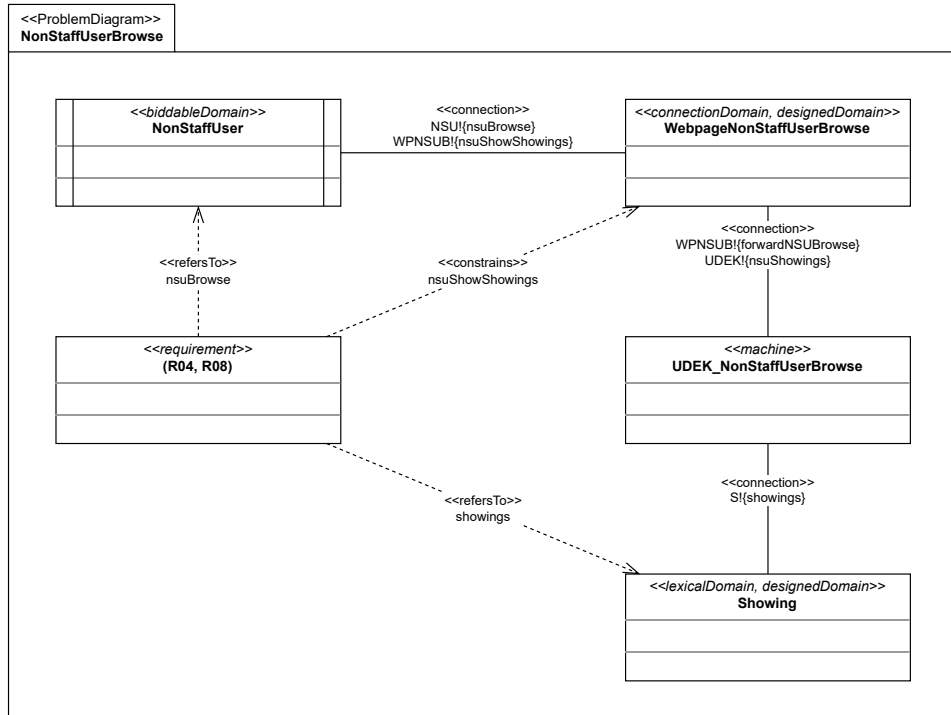


Figure 1.6: Problem diagram for R4 / R8

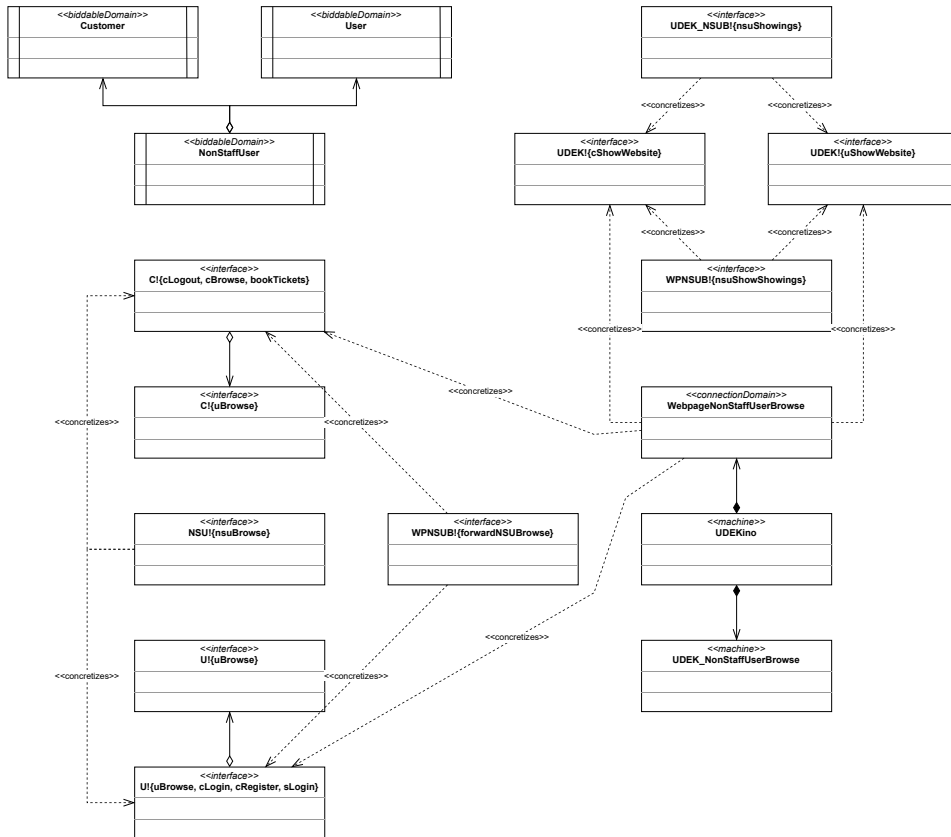


Figure 1.7: Mapping diagram for R4 / R8

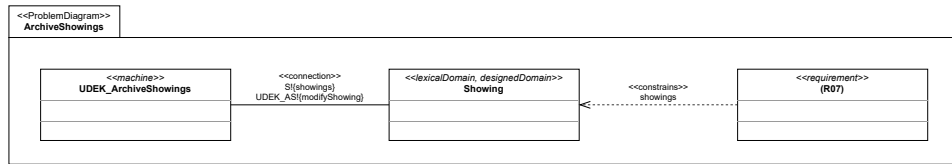


Figure 1.8: Problem diagram for R7

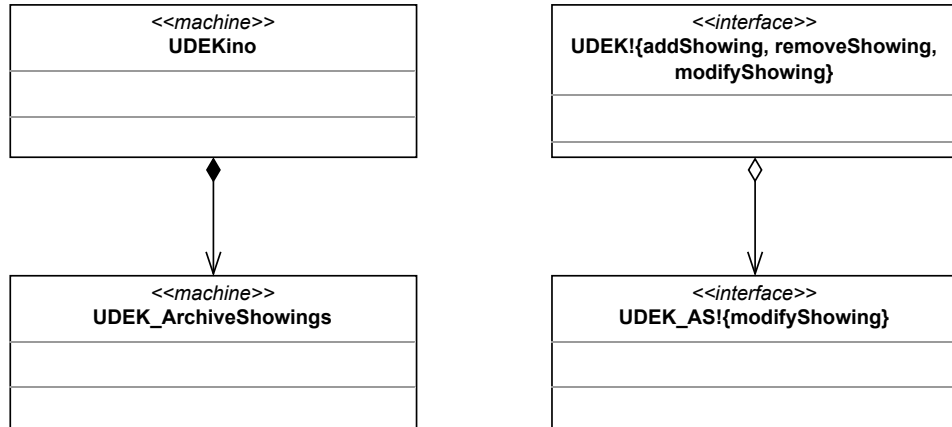


Figure 1.9: Mapping diagram for R7

Frames

- R1 fits to update 2
- R5 fits to update 2
- R4 / R8 fits to query 2
- R7 fits to simple transformation

1.3 A3

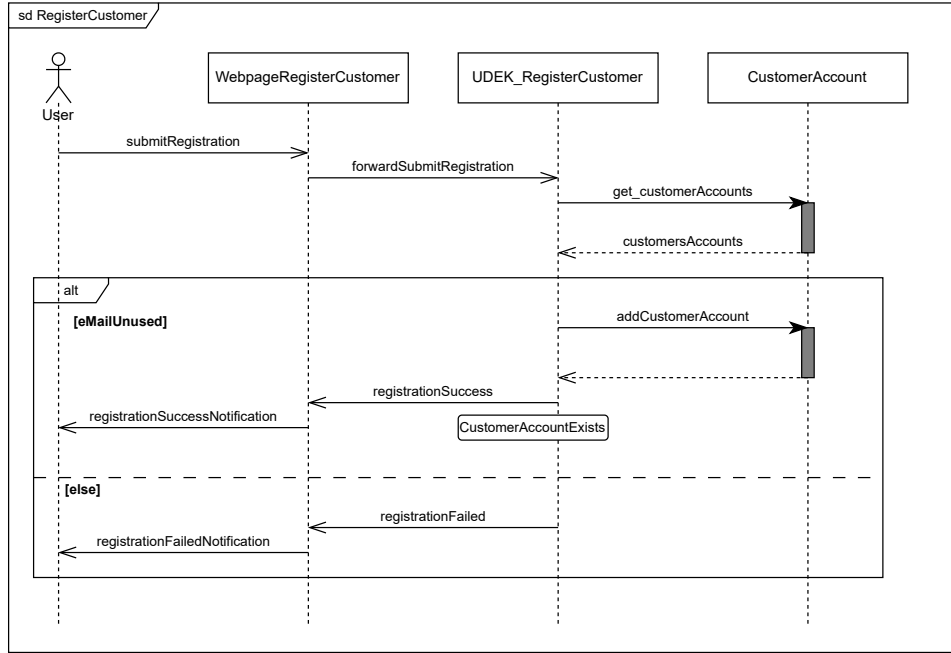


Figure 1.10: Sequence diagram for R1

S1a WebpageRegisterCustomer

When the `WebpageRegisterCustomer` receives the command "submitRegistration", the command is forwarded to machine with "forwardSubmitRegistration". Results are received via commands "registrationFailed" or "registrationSuccess" and displayed to the User via "registrationFailedNotification" / "registrationSuccessNotification".

S1b UDEK_RegisterCustomer

When the machine receives the command "forwardSubmitRegistration" the availability of the e-mail address is checked against existing Customer accounts in the Customer-Account database via "get_customerAccounts". If the e-mail address is available, a new Customer account is created with the data from the forwarded request and added to the CustomerAccount database via "addCustomerAccount" and a confirmation is sent to the `WebpageRegisterCustomer` via "registrationSuccess". If the e-mail address is not available, account creation fails and a failure notification is sent to the `WebpageRegisterCustomer` via "registrationFailed".

S1c CustomerAccount

When the database receives the command "get_customerAccounts", all Customer accounts are returned as the data "customerAccounts". When the database receives the command "addCustomerAccount", the Customer account is added.

$$(A2) \wedge (S1a) \wedge (S1b) \wedge (S1c) \implies (R1)$$

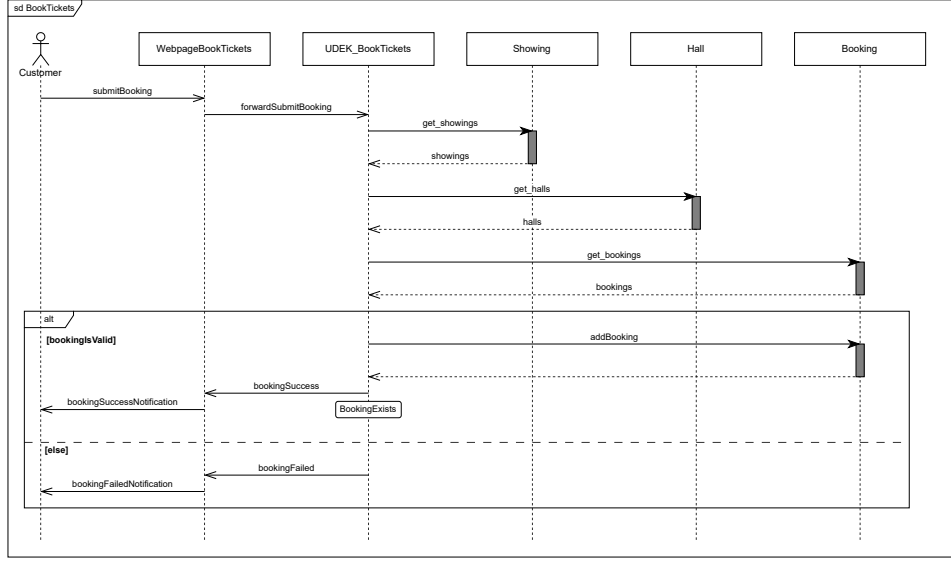


Figure 1.11: Sequence diagram for R5

S2a WebpageBookTickets

When the Webpage receives the command “submitBooking”, the command is forwarded to the machine with the command “forwardSubmitBooking”. Results are received via “bookingFailed” or “bookingSuccess” and displayed the the Customer via “bookingFailedNotification” / “bookingSuccessNotification”

S2b UDEK_BookTickets When the machine receives the command “forwardSubmitBooking”, the machine checks the availability of the desired showing and seats against the Showing database, Hall database and Booking database via “get_showings”, “get_halls” and “get_bookings”. If the desired showing and seats exist, the showing begins in more than 15 minutes and the seats are not already booked, the booking is added to the Booking database via “addBooking” and a success notification is sent to the Webpage-BookTickets via “bookingSuccess”. Otherwise the booking fails and the Webpage is notified of the failure via “bookingFailed”.

S2c Showing When the database receives the command “get_showings”, all showings are returned as the data “showings”.

S2d Hall When the database receives the command “get_halls”, all halls are returned as the data “halls”.

S2e Booking When the database receives the command “get_bookings”, all bookings are returned as the data “bookings”. When the database receives the command “addBooking”, the booking is added.

$$(F3) \wedge (S2a) \wedge (S2b) \wedge (S2c) \wedge (S2d) \wedge (S2e) \implies (R5)$$

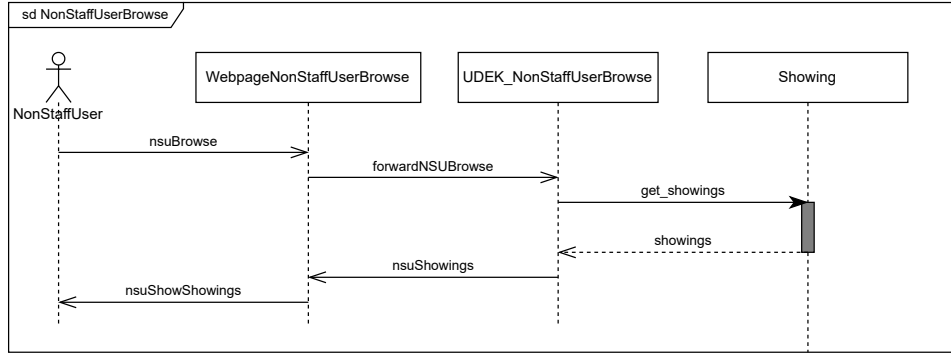


Figure 1.12: Sequence diagram for R4/R8

- S3a **WebpageNonStaffUserBrowse** When the Webpage receives the command “nsuBrowse”, the command is forwarded to the machine with the command “forwardNSUBrowse”. Results are received via “nsuShowings” and displayed to NonStaffUser via “nsuShowShowings”.
- S3b **UDEK_NonStaffUserBrowse** When the machine receives the command ”forwardNSUBrowse”, the machine gets all showings from the Showing database via “get_showings”. All non-archived showings are send/transferred to the Webpage via “nsuShowings”.
- S3c **Showing** When the database receives the command “get_showings”, all showings are returned data as “showings”

$$(S3a) \wedge (S3b) \wedge (S3c) \implies (R4) \wedge (R8)$$

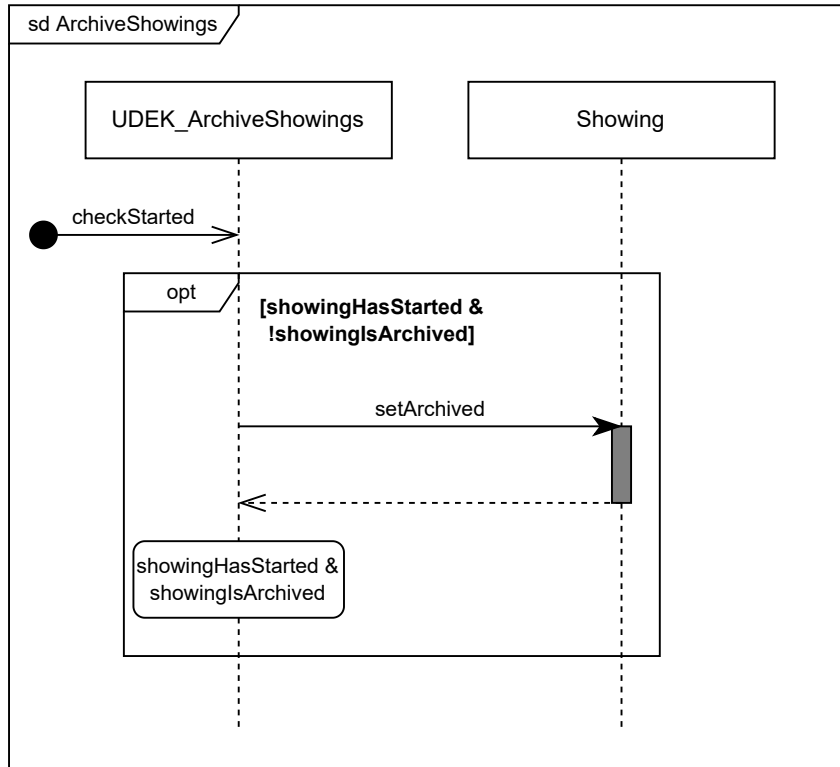


Figure 1.13: Sequence diagram for R7

S4a **UDEK_ArchiveShowings** When receiving the command “checkStarted”, all showings which have already started, and are not yet marked as archived, are marked as archived using the command “setArchived”.

S4b **Showing** When receiving the command “setArchived”, all showings which have already started, and are not yet marked as archived, are marked as archived.

$$(S4a) \wedge (S4b) \implies (R7)$$

1.4 A4

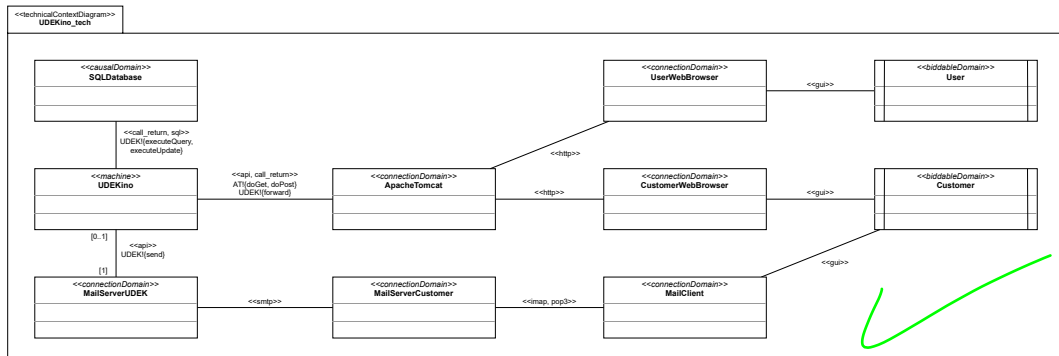


Figure 1.14: Technical Context Diagram

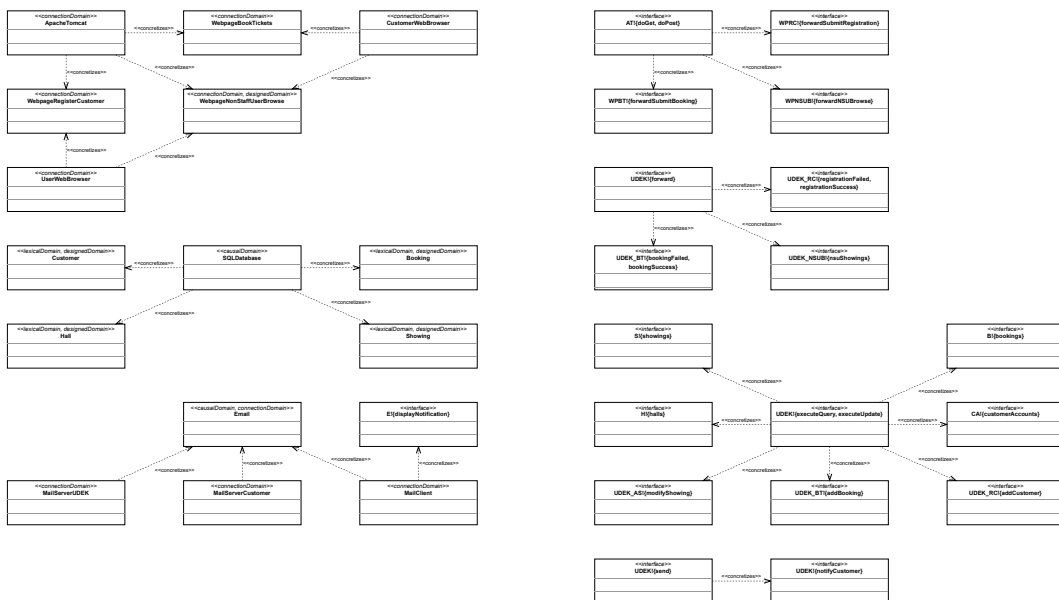


Figure 1.15: Mapping Diagram of the TCD

1.5 A5

A short OCL example:

1.5.1 RegisterCustomer

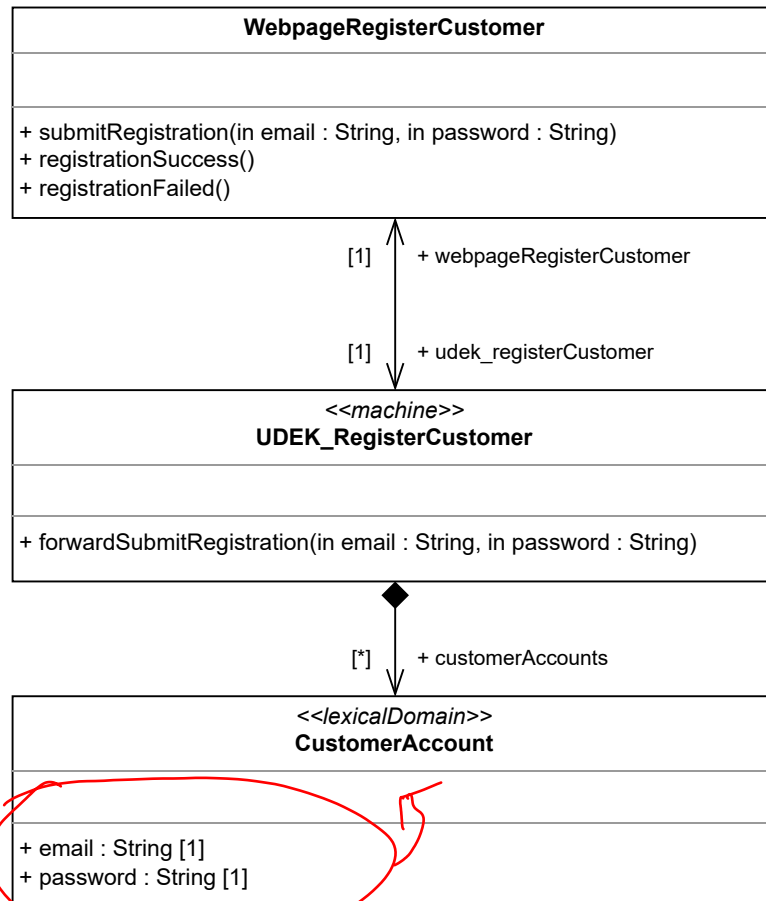


Figure 1.16: Class model of the operation RegisterCustomer

Name: forwardSubmitRegistration

Description: Creates a new Customer Account with the supplied e-mail address and password and adds it to the database and then sends a success notification to the webpage, or sends a failure notification to the webpage

OCL constraint:

```
1 context UDEK_RegisterCustomer
2 inv: customerAccounts->isUnique(email)
3
4 context UDEK_RegisterCustomer::forwardSubmitRegistration(email
5     : String, password : String)
6 pre: true
7 post:
    let eMailUnused : Boolean =
```

```

8      customerAccounts@pre->one(
9          c : CustomerAccount
10         | c.email = email
11     )
12 in let CustomerAccountExists : Boolean =
13     customerAccounts->one(
14         c : CustomerAccount
15         | c.email = email and c.password = password
16     )
17 in
18     if eMailUnused
19     then CustomerAccountExists and
20         webpageRegisterCustomer^registrationSuccess()
21     else webpageRegisterCustomer^registrationFailed()

```

size überprüfen

1.5.2 NonStaffUserBrowse

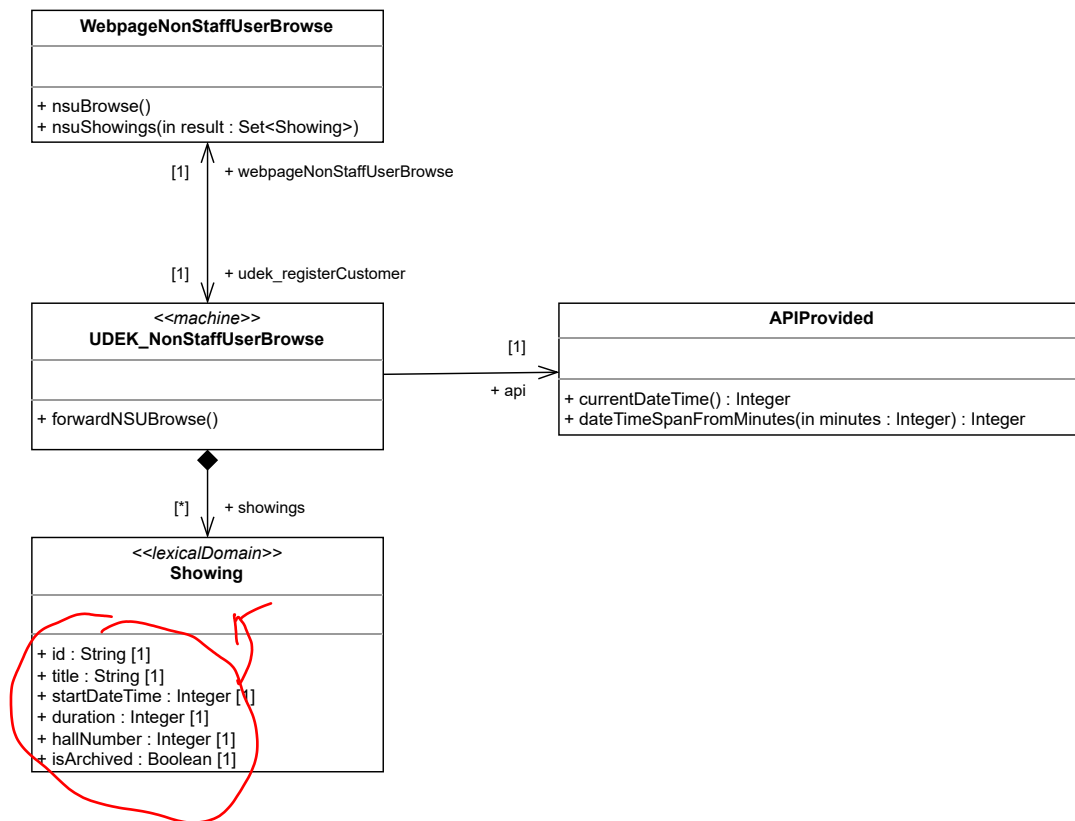


Figure 1.17: Class model of the operation NonStaffUserBrowse

Name: forwardNSUBrowse

Description: sends a set containing all showings which are not archived to the webpage

OCL constraint:

```

1 context UDEK_NonStaffUserBrowse
2 inv:

```

```
3 showings->isUnique(id)
4 and showings->forall(
5     s : Showing
6     | s.isArchived = s.start > api.currentDateTime() -
7         api.dateTimeSpanFromMinutes(15))
8 context UDEK_NonStaffUserBrowse::forwardNSUBrowse()
9 pre: true
10 post: webpageNonStaffUserBrowse^nsuShowings(showings->select(s
    : Showing | not s.isArchived))
```


1.6 A6

Examples of a life-cycle using the math-environment:

$$LC_{guest} = (Browse^+; [Book])^*$$

2 Design

2.1 D1

2.2 D2

2.3 D3

2.4 D4

State diagrams with tikZ:

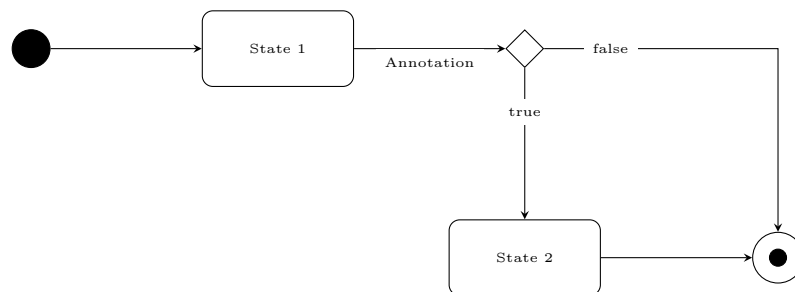


Figure 2.1: Zustandsdiagramm Person 1

3 Implementation & Testing

3.1 I

3.2 T1

3.3 T2

3.4 T3

4 Glossary

Table 4.1: Glossary

Name	Type	Description	Source
A			
addBooking	phenomenon	the machine adds a new booking to the bookings database	CD
addBooking	message	contains a showing ID and seats	SD R5
addCustomerAccount	phenomenon	the machine adds a new customer to the customer accounts database	CD
addCustomerAccount	message	contains an e-mail address and a password	SD R1
addShowing	phenomenon	the machine adds a new showing to the customer accounts database	CD
APIProvided	class	a class containing various auxiliary functions provided by the runtime environment	Class Model
api	class call name	an instance of the APIProvided class	Class Model
ApacheTomcat	connection domain	An Open Source JSP and Servlet Container from the Apache Foundation.	TCD
B			
BookingExists	state predicate	given booking exists within the Booking database	SD R5
bookingFailed	phenomenon	the machine notifies the webpage that a booking has failed	PD R5
bookingFailed	message	informs the WebpageBookTickets that the booking failed	SD R5
bookingFailedNotification	phenomenon	the webpage displays a notification to the customer that a booking has failed	PD R5
bookingFailedNotification	message	informs the user that the booking failed	SD R5
bookingIsValid	guard	showing with ID contained in request exists and starts in more than 15 minutes and the seats contained in the request exist in the showing's hall and are not already booked	SD R5
bookings	phenomenon	the bookings database provides the bookings data to the machine	CD
bookings	message	all bookings in the Booking database	PD R5

Table 4.1: Glossary

Name	Type	Description	Source
bookingSuccess	phenomenon	the machine notifies the webpage that a booking has succeeded	PD R5
bookingSuccess	message	informs the WebpageBookTickets that the booking was successful	SD R5
bookingSuccessNotification	phenomenon	the webpage displays a notification to the customer that a booking has succeeded	PD R5
bookingSuccessNotification	message	informs the Customer that the booking was successful	SD R5
Booking	lexical domain, designed domain	a database containing the bookings made by customers	CD
Booking	object	the database containing all bookings	SD R5
bookTickets	phenomenon	a customer books tickets for a showing	CD
C			
cBrowse	phenomenon	a customer browses available showings	CD
checkStarted	found message	a prompt for the UDEK_ArchiveShowings machine to mark all showings which have already started and are not marked as archived, as archived	SD R7
cLogin	phenomenon	a user attempts to log into a customer account	CD
cLogout	phenomenon	a customer attempts to log out	CD
cRegister	phenomenon	a user attempts to create customer account on UDEKino	CD
cShowWebsite	phenomenon	the machine shows a website to the customer	CD
currentDateTime()	auxiliary function	returns the current time in unix epoch time	Class Model
Customer	biddable domain	a customer of UDEKino; a user who has logged into a customer account	CD, TCD
Customer	actor	a customer who wishes to book tickets	SD R5
CustomerAccountExists	state predicate	the customer account with the given e-mail address and password exists within the CustomerAccount database	SD R1
customerAccounts	phenomenon	the customerAccounts database provides the customerAccounts data to the machine	CD
customerAccounts	message	all customer accounts in the CustomerAccount database	SD R1
CustomerAccount	lexical domain, designed domain	a database containing customer accounts	CD

Table 4.1: Glossary

Name	Type	Description	Source
CustomerAccount	class	a record representing a Customer account	Class Model
customerAccounts	class call name	the database of CustomerAccounts	Class Model
CustomerWebBrowser	connection domain	Web browser used by a logged in customer, e.g. Mozilla Firefox.	TCD
CustomerAccount	object	the database of customer accounts	SD R1
D			
displayNotification	phenomenon	the customer's e-mail client displays a notification e-mail to the customer	CD
dateTimeSpanFromMinutes (in minutes : Integer)	auxiliary function	returns the parameter minutes as unix epoch time	Class Model
doGet	technical phenomenon	A procedure called by the Jakarta Servlet container in which the machine can handle an incoming HTTP GET request. (See forward.)	TCD
doPost	technical phenomenon	A procedure called by the Jakarta Servlet container in which the machine can handle an incoming HTTP POST request. (See forward.)	TCD
duration	attribute	the duration of the movie that is to be shown	Class Model
E			
Email	causal domain, connection domain	an e-mail service offering to deliver e-mails	CD
eMailUnused	guard	the e-mail contained in the registration request is not contained in customerAccounts	SD R1
executeQuery	technical phenomenon	A procedure the machine can call to query the contents of a SQL database.	TCD
executeUpdate	technical phenomenon	A procedure the machine can call to manipulate a SQL database.	TCD
F			
forward	technical phenomenon	An assortment of procedures and manipulable resources the machine can use to prepare HTTP responses which are then sent by the Jakarta Servlet container.	TCD
forwardNSUBrowse	phenomenon	the website sends a request for a list of upcoming showings to the machine	PD R4 / R8
forwardNSUBrowse()	method	the machine handles the browse request	Class Model

Table 4.1: Glossary

Name	Type	Description	Source
forwardNSUBrowse	message	a request for the machine to send a list of available, i.e., non-archived, showings	SD R4/8
forwardSubmitBooking	phenomenon	the webpage forwards a request to book tickets to the machine	PD R5
forwardSubmitRegistration()	method	the machine handles the registration request: it creates a new account if possible and sends a status notification to the webpage	Class Model
forwardSubmitBooking	message	contains the showing ID and the desired seats	SD R5
forwardSubmitRegistration	phenomenon	the webpage forwards a request to register a customer account to the machine	PD R1
forwardSubmitRegistration	message	a request from the WebpageRegisterCustomer to register a new customer account, containing an e-mail address and a password	SD R1
G			
get_bookings	message	contains all messages in the Booking database	SD R5
get_customerAccounts	message	returns all customer accounts in the CustomerAccount database	SD R1
get_halls	message	returns all halls in the Hall database	SD R5
get_showings	message	returns all showings in the Showing database	SD R5, 4/8, 7
gui	technical phenomenon	The web browser renders a webpage.	TCD
H			
halls	phenomenon	the halls database provides the halls data to the machine	CD
halls	message	all halls in the Hall database	SD R5
Hall	lexical domain	a database containing the cinema halls, provided by the cinema operator	CD
Hall	object	the database containing the cinema halls	SD R5
hallNumber	attribute	the number of the hall the showing will take place in	Class Model
http	technical phenomenon	The Hypertext Transfer Protocol . A client-server protocol for requesting and providing data, like webpages, over the internet.	TCD
I			
id	attribute	the unique id of the showing	Class Model
imap	technical phenomenon	Internet Message Access Protocol	TCD
isArchived	attribute	indicates whether the showing is archived	Class Model

Table 4.1: Glossary

Name	Type	Description	Source
J			
K			
L			
M			
MailClient	connection domain	the Customer's E-Mail client	TCD
MailServerCustomer	connection domain	the customer's E-Mail server	TCD
MailServerUDEK	connection domain	the system's E-Mail server	TCD
minutes	parameter	the minutes to be converted to unix epoch time	Class Model
modifyShowing	phenomenon	the machine modifies a showing in the showings database	CD
N			
NonStaffUser	biddable domain	either of Customer or User	PD R4 / R8
NonStaffUser	actor	a user who is not logged in as staff and wishes to browse available showings	SD R4/8
notifyCustomer	phenomenon	the machine notifies the customer via e-mail	CD
nsuBrowse	phenomenon	either of cBrowse or uBrowse	PD R4 / R8
nsuBrowse	message	a request for the WebpageNonStaffUserBrowse to display available showings	SD R4/8
nsuBrowse()	method	the user requests a list of available showings on the webpage	Class Model
nsuShowings	phenomenon	the machine sends a list of upcoming showings to be displayed by the website	PD R4 / R8
nsuShowings	message	contains available, i.e., non-archived, showings	SD R4/8
nsuShowings()	method	the machine sends a set of available showings to the webpage	Class Model
nsuShowShowings	phenomenon	the website displays a list of upcoming showings to the user	PD R4 / R8
nsuShowShowings	message	a rendition of available, i.e., non-archived, showings	SD R4/8
O			
P			
pop3	technical phenomenon	Post Office Protocol - Version 3	
Q			
R			
registrationFailed	phenomenon	the machine notifies the webpage that the registration has failed	PD R1

Table 4.1: Glossary

Name	Type	Description	Source
registrationFailed	message	informs the WebpageRegister-Customer that account creation has failed	SD R1
registrationFailed()	method	the webpage is notified that the registration was successful	Class Model
registrationFailedNotification	phenomenon	the webpage displays a to the user that the registration has failed	PD R1
registrationFailedNotification	message	informs the user that account creation has succeeded	SD R1
registrationSuccess	phenomenon	the machine notifies the webpage that the registration has succeeded	PD R1
registrationSuccess	message	informs the WebpageRegister-Customer that account registration has succeeded	SD R1
registrationSuccess()	method	the webpage is notified that the registration was unsuccessful	Class Model
registrationSuccessNotification	phenomenon	the webpage displays a notification to the user that the registration has succeeded	PD R1
registrationSuccessNotification	message	informs the User that account creation has succeeded	SD R1
removeBooking	phenomenon	the machine removes a booking from the bookings database	CD
removeCustomer	phenomenon	the machine removes a customer from the customers database	CD
removeShowing	phenomenon	the machine removes a showing from the showings database	CD
result	parameter	the set of available showings	Class Model
S			
sBrowse	phenomenon	a staff member browses available showings	CD
sCancelShowing	phenomenon	a staff member attempts to cancel a showing	CD
send	technical phenomenon	the machine sends an e-mail	TCD
setArchived	message	contains the ID of the showing which is to be marked as archived	SD R7
Showing	lexical domain, designed domain	a database containing the cinema showings	CD
Showing	object	the database containing the showings	SD R5, 4/8, 7
Showing	class	a record representing a showing	Class Model
ShowingHasStarted	guard / state predicate	whether the showing in question has already started, i.e., its starting date and time lies in the past	SD R7
ShowingIsArchived	guard / state predicate	whether the showing in question is marked as archived"	SD R7

Table 4.1: Glossary

Name	Type	Description	Source
showings	phenomenon	the showings database provides the showings data to the machine	CD
showings	message	contains all showings in the Showing database	SD R5, 4/8, 7
showings sLogin	class call name phenomenon	the database of Showings a user attempts to log in as a staff member	Class Model CD
sLogout	phenomenon	a staff member attempts to log out	CD
SMTP	technical phe- nomenon	Simple Mail Transfer Protocol	TCD
sShowWebsite	phenomenon	the machine shows a website to the staff member	CD
StaffMember	biddable domain	a member of cinema staff; a user who has logged in as staff	CD
startDateTime	attribute	the date and time the showing will start at in unix epoch time	Class Model
submitBooking	phenomenon	the customer selects the tickets they wish to book and hits the submit button	PD R5
submitBookign	message	contains the showing ID and desired seats	SD R5
submitRegistration	phenomenon	the user submits a request to register a new customer account, containing an e-mail address and a password	PD R1
submitRegistration	message	a request from the user to register a new customer account, containing an e-mail address and a password	SD R1
submitRegistration(in email : String, in password : String)	method	the method with which the user submits the registration form	Class Model
submitShowing	phenomenon	a staff member submits a new showing to the machine for entry into the database	CD
T			
U			
uBrowse	phenomenon	a user browses available showings	CD
UDEKino	machine	the machine to be developed	CD, TCD
UDEK_ArchiveShowings	machine	the sub-machine responsible for automatically archiving showings once they have begun	PD R7
UDEK_ArchiveShowings	object	the sub-machine responsible for archiving showings which have already started	SD R7
UDEK_BookTickets	machine	the sub-machine responsible for customer booking tickets	PD R5
UDEK_BookTickets	object	the machine responsible for the booking of tickets	SD R5

Table 4.1: Glossary

Name	Type	Description	Source
UDEK_NonStaffUserBrowse	machine	the sub-machine responsible for registered and non-registered customers browsing upcoming showings	PD R4 / R8
UDEK_NonStaffUserBrowse	class	the machine class	Class Model
udek_NonStaffUserBrowse	class call name	the instance of the machine class the webpage belongs to	Class Model
UDEK_RegisterCustomer	machine	the sub-machine responsible for customer account registration	PD R1
UDEK_RegisterCustomer	object	the machine responsible for customer account registration	SD R1
UDEK_RegisterCustomer	class	the machine class	Class Model
udek_registerCustomer	class call name	the instance of the machine class the webpage belongs to	Class Model
User	biddable domain	a user of the application who is not logged in	CD, TCD
UserWebBrowser	connection domain	Web browser used by a user who is not logged in, e.g. Mozilla Firefox.	TCD
User	actor	a user of who wishes to register a new customer account	SD R??
uShowWebsite	phenomenon	the machine shows a website to the user	CD
V			
W			
WebpageBookTickets	connection domain, designed domain	a webpage via which a customer can book tickets	PD R5
WebpageBookTickets	object	the webpage for booking tickets	SD R5
WebpageNonStaffUserBrowse	connection domain, designed domain	a webpage via which a user can browse upcoming showings	PD R4 / R8
WebpageNonStaffUserBrowse	object	the webpage for NonStaffUsers to browse available showings	SD R4/8
WebpageNonStaffUserBrowse	class	the class representing the webpage for browsing showings	Class Model
webpageNonStaffUserBrowse	class call name	the webpage instance whose request is currently being handled	Class Model
WebpageRegisterCustomer	connection domain, designed domain	a webpage via which a user can register a new customer account	PD R1
WebpageRegisterCustomer	object	the webpage for registering a new customer account	SD R1
WebpageRegisterCustomer	class	the class of the webpage for customer registration	Class Model
webpageRegisterCustomer	class call name	the instance of the registration webpage class whose request is currently being handled	Class Model
X			
Y			

Table 4.1: Glossary

Name	Type	Description	Source
Z			