ENSF 608: Entity-Relationship (ER) Modelling and Enhanced Entity-Relationship Modelling

Dr. Emily Marasco

Fall 2021


Textbook: Fundamentals of Database Systems, 7th Ed., Elmasri & Navathe

Subclasses and Superclasses (1 of 5)

- An entity type may have additional meaningful subgroupings of its entities
 - Example: EMPLOYEE may be further grouped into:
 - SECRETARY, ENGINEER, TECHNICIAN, ...
 - Based on the EMPLOYEE's Job
 - MANAGER
 - EMPLOYEEs who are managers (the role they play)
 - SALARIED_EMPLOYEE, HOURLY_EMPLOYEE
 - Based on the EMPLOYEE's method of pay
- EER diagrams extend ER diagrams to represent these additional subgroupings, called subclasses or subtypes

Subclasses and Superclasses (2 of 5)

Figure 4.1 EER diagram notation to represent subclasses and specialization.

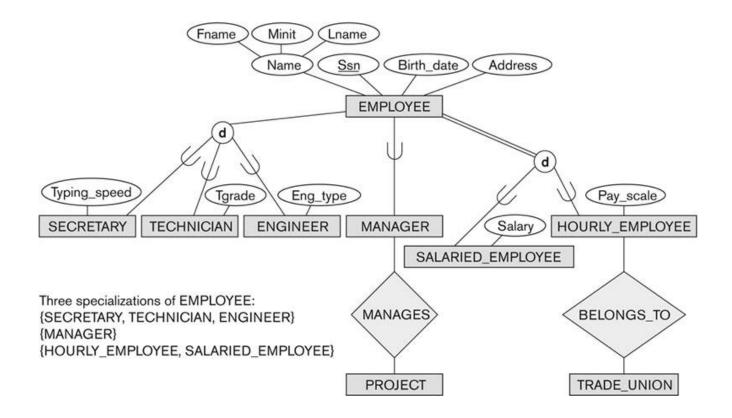

Subclasses and Superclasses (3 of 5)

- Each of these subgroupings is a subset of EMPLOYEE entities
- Each is called a subclass of EMPLOYEE
- EMPLOYEE is the superclass for each of these subclasses
- These are called superclass/subclass relationships:
 - EMPLOYEE/SECRETARY
 - EMPLOYEE/TECHNICIAN
 - EMPLOYEE/MANAGER

_ ...

Subclasses and Superclasses (4 of 5)

- These are also called IS-A relationships
 - SECRETARY IS-A EMPLOYEE, TECHNICIAN IS-A EMPLOYEE,
- Note: An entity that is member of a subclass represents the same real-world entity as some member of the superclass:
 - The subclass member is the same entity in a distinct specific role
 - An entity cannot exist in the database merely by being a member of a subclass; it must also be a member of the superclass
 - A member of the superclass can be optionally included as a member of any number of its subclasses

Subclasses and Superclasses (5 of 5)

- Examples:
 - A salaried employee who is also an engineer belongs to the two subclasses:
 - ENGINEER, and
 - SALARIED_EMPLOYEE
 - A salaried employee who is also an engineering manager belongs to the three subclasses:
 - MANAGER,
 - ENGINEER, and
 - SALARIED_EMPLOYEE
- It is not necessary that every entity in a superclass be a member of some subclass

Attribute Inheritance in Superclass / Subclass Relationships


- An entity that is member of a subclass inherits
 - All attributes of the entity as a member of the superclass
 - All relationships of the entity as a member of the superclass

Example:

- In the previous slide, SECRETARY (as well as TECHNICIAN and ENGINEER) inherit the attributes Name, SSN, ..., from EMPLOYEE
- Every SECRETARY entity will have values for the inherited attributes

Representing Specialization in EER Diagrams

Figure 4.4 EER diagram notation for an attribute-defined specialization on Job_type.

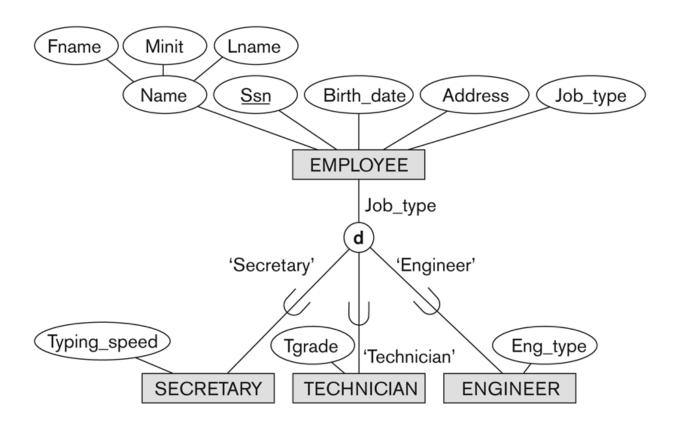

Specialization (1 of 3)


- Specialization is the process of defining a set of subclasses of a superclass
- The set of subclasses is based upon some distinguishing characteristics of the entities in the superclass
 - Example: {SECRETARY, ENGINEER, TECHNICIAN} is a specialization of EMPLOYEE based upon job type.
 - Example: MANAGER is a specialization of EMPLOYEE based on the role the employee plays
 - May have several specializations of the same superclass

Specialization (2 of 3)

- Example: Another specialization of EMPLOYEE based on method of pay is {SALARIED_EMPLOYEE, HOURLY_EMPLOYEE}.
 - Superclass/subclass relationships and specialization can be diagrammatically represented in EER diagrams
 - Attributes of a subclass are called specific or local attributes.
 - For example, the attribute TypingSpeed of SECRETARY
 - The subclass can also participate in specific relationship types.
 - For example, a relationship BELONGS_TO of HOURLY EMPLOYEE

Specialization (3 of 3)

Figure 4.1 EER diagram notation to represent subclasses and specialization.

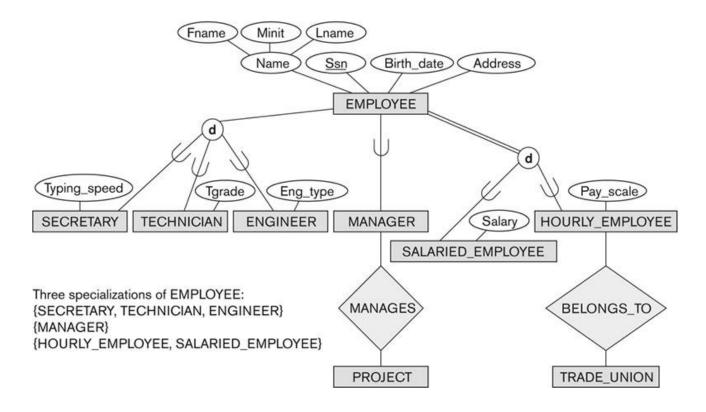


Generalization (1 of 2)

- Generalization is the reverse of the specialization process
- Several classes with common features are generalized into a superclass;
 - original classes become its subclasses
- Example: CAR, TRUCK generalized into VEHICLE;
 - both CAR, TRUCK become subclasses of the superclass VEHICLE.
 - We can view {CAR, TRUCK} as a specialization of VEHICLE
 - Alternatively, we can view VEHICLE as a generalization of CAR and TRUCK

Generalization (2 of 2)

Figure 4.3 Generalization. (a) Two entity types, CAR and TRUCK. (b) Generalizing CAR and TRUCK into the superclass VEHICLE.

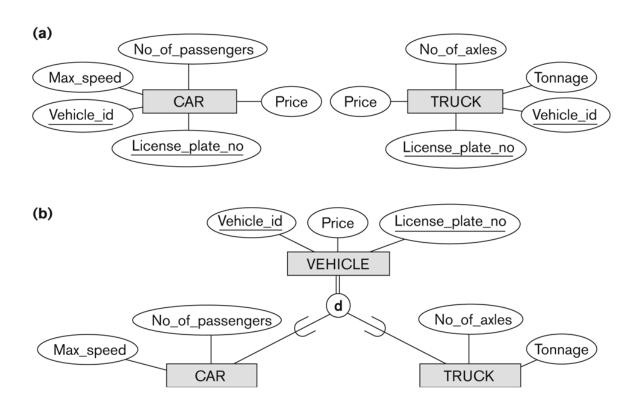

Generalization and Specialization (1 of 2)

- Diagrammatic notations are sometimes used to distinguish between generalization and specialization
 - Arrow pointing to the generalized superclass represents a generalization
 - Arrows pointing to the specialized subclasses represent a specialization
 - We do not use this notation because it is often subjective as to which process is more appropriate for a particular situation
 - We advocate not drawing any arrows

Generalization and Specialization (2 of 2)


- Data Modeling with Specialization and Generalization
 - A superclass or subclass represents a collection (or set or grouping) of entities
 - It also represents a particular type of entity
 - Shown in rectangles in EER diagrams (as are entity types)
 - We can call all entity types (and their corresponding collections) classes, whether they are entity types, superclasses, or subclasses

Types of Specialization

- Predicate-defined (or condition-defined): based on some predicate. E.g., based on value of an attribute, say, Jobtype, or Age.
 - Write the predicate condition next to the line attaching the subclass to its superclass
- Attribute-defined: shows the name of the attribute next to the line drawn from the superclass toward the subclasses (see Figure 4.1)
- User-defined: membership is defined by the user on an entity by entity basis

Displaying an Attribute-Defined Specialization in EER diagrams

Figure 4.4 EER diagram notation for an attribute-defined specialization on Job_type.

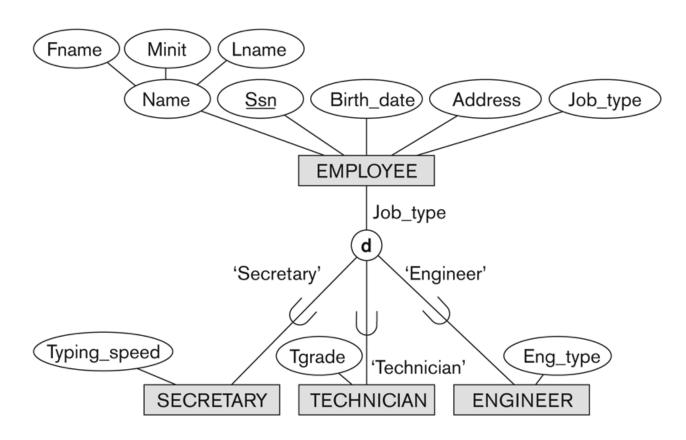

- Two basic constraints can apply to a specialization/generalization:
 - Disjointness Constraint:
 - Completeness Constraint:


- Disjointness Constraint:
 - Specifies that the subclasses of the specialization must be **disjoint**:
 - an entity can be a member of at most one of the subclasses of the specialization
 - Specified by d in EER diagram
 - If not disjoint, specialization is overlapping:
 - that is the same entity may be a member of more than one subclass of the specialization
 - Specified by o in EER diagram

- Completeness (Exhaustiveness) Constraint:
 - Total specifies that every entity in the superclass must be a member of some subclass in the specialization/generalization
 - Shown in EER diagrams by a double line
 - Partial allows an entity not to belong to any of the subclasses
 - Shown in EER diagrams by a single line

- Hence, we have four types of specialization/generalization:
 - Disjoint, total
 - Disjoint, partial
 - Overlapping, total
 - Overlapping, partial
- Note: Generalization usually is total because the superclass is derived from the subclasses.


Example of Disjoint Partial Specialization

Figure 4.4 EER diagram notation for an attribute-defined specialization on Job_type.

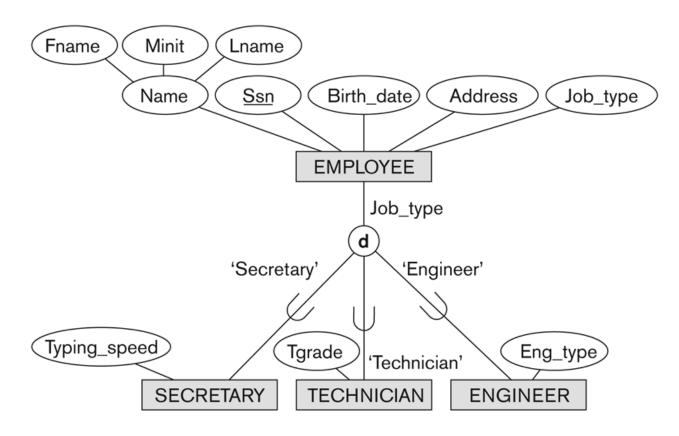

Example of Overlapping Total Specialization

Figure 4.5 EER diagram notation for an overlapping (nondisjoint) specialization.

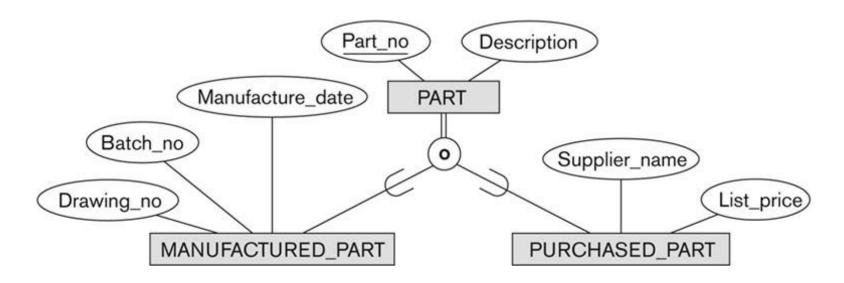


Specialization/Generalization Hierarchies, Lattices & Shared Subclasses (1 of 3)

- A subclass may itself have further subclasses specified on it
 - forms a hierarchy or a lattice
- Hierarchy has a constraint that every subclass has only one superclass (called single inheritance); this is basically a tree structure
- In a lattice, a subclass can be subclass of more than one superclass (called multiple inheritance)

Shared Subclass "Engineering_Manager"

Figure 4.6 A specialization lattice with shared subclass ENGINEERING_MANAGER.

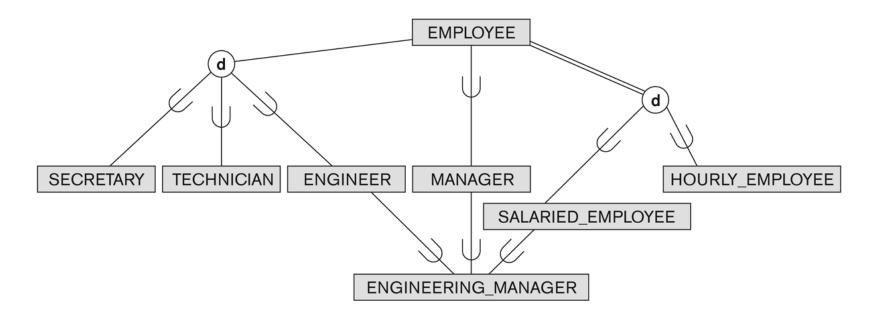

Specialization/Generalization Hierarchies, Lattices & Shared Subclasses (2 of 3)


- In a lattice or hierarchy, a subclass inherits attributes not only of its direct superclass, but also of all its predecessor superclasses
- A subclass with more than one superclass is called a shared subclass (multiple inheritance)
- Can have:
 - specialization hierarchies or lattices, or
 - generalization hierarchies or lattices,
 - depending on how they were derived
- We just use specialization (to stand for the end result of either specialization or generalization)

Specialization/Generalization Hierarchies, Lattices & Shared Subclasses (3 of 3)

- In specialization, start with an entity type and then define subclasses of the entity type by successive specialization
 - called a top down conceptual refinement process
- In generalization, start with many entity types and generalize those that have common properties
 - Called a **bottom up** conceptual synthesis process
- In practice, a combination of both processes is usually employed


Specialization / Generalization Lattice Example (UNIVERSITY)

Figure 4.7 A specialization lattice with multiple inheritance for a UNIVERSITY database.

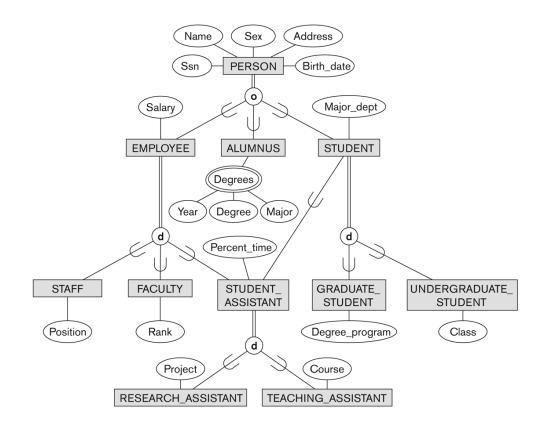

Set Theory Refresher

- Two sets, A and B
- Union of sets A and B
 - A ∪ B = the set of all elements in A and B, no duplicates



- Intersection of sets A and B
 - A ∩ B = the set of common elements between A and B



- A is a subset of B
 - A ⊆ B = all elements of A are also elements of B
- A is a proper subset of B
 - A ⊂ B all elements of A are also elements of B AND A ≠ B

Categories (UNION TYPES) (1 of 2)


- A shared subclass is a subclass in:
 - more than one distinct superclass/subclass relationships
 - each relationship has a single superclass
 - shared subclass leads to multiple inheritance
- In some cases, we need to model a single superclass/subclass relationship with more than one superclass
- Superclasses can represent different entity types
- Such a subclass is called a category or UNION TYPE

Categories (UNION TYPES) (2 of 2)

- Example: In a database for vehicle registration, a vehicle owner can be a PERSON, a BANK (holding a lien on a vehicle) or a COMPANY.
 - A category (UNION type) called OWNER is created to represent a subset of the union of the three superclasses COMPANY, BANK, and PERSON
 - A category member must exist in at least one (typically just one) of its superclasses
- Difference from shared subclass, which is a:
 - subset of the intersection of its superclasses
 - shared subclass member must exist in **all** of its superclasses

Two Categories (UNION Types): OWNER, REGISTERED_VEHICLE

Figure 4.8 Two categories (union types): OWNER and REGISTERED_VEHICLE.

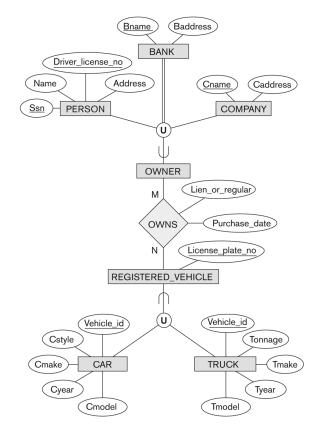


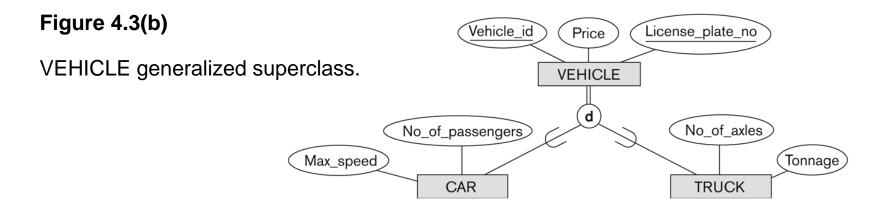


Figure 4.8 (zoomed)

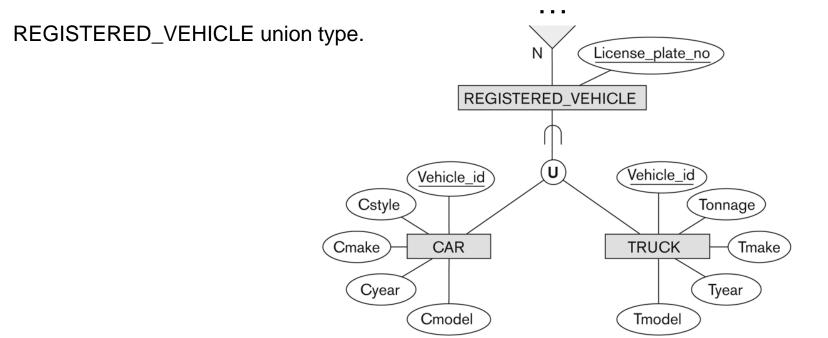

Formal Definitions of EER Model (1 of 4)

- Class C:
 - A type of entity with a corresponding set of entities:
 - could be entity type, subclass, superclass, or category
- Note: The definition of relationship type in ER/EER should have 'entity type' replaced with 'class' to allow relationships among classes in general
- Subclass S is a class whose:
 - Type inherits all the attributes and relationship of a class C
 - Set of entities must always be a subset of the set of entities of the other class C
 - $S \subseteq C$
 - C is called the superclass of S
 - A superclass/subclass relationship exists between S and C

Formal Definitions of EER Model (2 of 4)

- Specialization Z:Z={S1,S2,...,Sn} is a set of subclasses with same superclass G; hence, G/Si is a superclass relationship for i = 1,...,n.
 - G is called a generalization of the subclasses {S1,S2,...,Sn}
 - Z is total if we always have:
 - $S1 \cup S2 \cup ... \cup Sn = G$;
 - Otherwise, Z is partial.
 - Z is disjoint if we always have:
 - Si∩Sj empty-set for i ≠ j;
 - Otherwise, Z is overlapping.

Formal Definitions of EER Model (3 of 4)

- Subclass S of C is predicate defined if predicate (condition) p on attributes of C is used to specify membership in S;
 - that is, S = C[p], where C[p] is the set of entities in C that satisfy condition p
- A subclass not defined by a predicate is called user-defined
- Attribute-defined specialization: if a predicate A = ci (where A is an attribute of G and ci is a constant value from the domain of A) is used to specify membership in each subclass Si in Z
 - Note: If Ci ≠ Cjfori ≠ j, and A is single-valued, then the attribute-defined specialization will be disjoint.

Formal Definitions of EER Model (4 of 4)

- Category or UNION type T
 - A class that is a subset of the union of n defining superclasses
 - D1,D2,...Dn,n > 1:
 - $T \subseteq (D1 \cup D2 \cup ... \cup Dn)$
 - Can have a predicate pi on the attributes of Di to specify entities of Di that are members of T.
 - If a predicate is specified on every

$$Di:T = (D1[p1] \cup D2[p2] \cup ... \cup Dn[pn])$$

Topic 3 Summary

- ER model concepts: entities, attributes, relationships
- Constraints in the ER model
- Using ER in step-by-step mode conceptual schema design for the COMPANY database
- Binary relationship types and those of higher degree
- Alternative notations UML class diagrams
- EER model concepts: class/subclass relationships, specialization and generalization, inheritance
- Constraints on EER schemas
- Notation for ER and EER diagrams

Copyright

This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.