


## Structured Query language (SQL)



1. Create database	<code>create database sample2</code>
2. Use the database	<code>use sample2</code>
3. Create table	<code>create table customer</code> <code>(</code> <code>customerid int identity(1,1) primary key,</code> <code>customernumber int not null unique check (customernumber&gt;0),</code> <code>lastname varchar(30) not null,</code> <code>firstname varchar(30) not null,</code> <code>areacode int default 71000,</code> <code>address varchar(50),</code> <code>country varchar(50) default 'Malaysia'</code> <code>)</code>
4. Insert values into table	<code>insert into customer values</code> <code>(100,'Fang Ying','Sham','418999','sdadasdfd',default),</code> <code>(200,'Mei Mei','Tan',default,'adssdsadsd','Thailand'),</code> <code>(300,'Albert','John',default,'dfdsfsdf',default)</code>
5. Display record from table	<code>-- display all records</code> <code>select * from customer</code>  <code>-- display particular columns</code> <code>select customerid, customernumber, lastname, firstname</code> <code>from customer</code>
6. Add new column to table	<code>alter table customer</code> <code>add phonenumber varchar(20)</code>
7. Add values to newly added column/ Update table	<code>update customer set phonenumber='1234545346' where</code> <code>customerid=1</code> <code>update customer set phonenumber='45554654' where</code> <code>customerid=2</code>
8. Delete a column	<code>alter table customer</code> <code>drop column phonenumber</code>
9. Delete record from table <code>--if not put 'where', will delete all record</code>	<code>delete</code> <code>from customer</code> <code>where country='Thailand'</code>
10. Delete table	<code>drop table customer</code>
11. Change data type	<code>alter table customer</code> <code>alter column phonenumber varchar(10)</code>



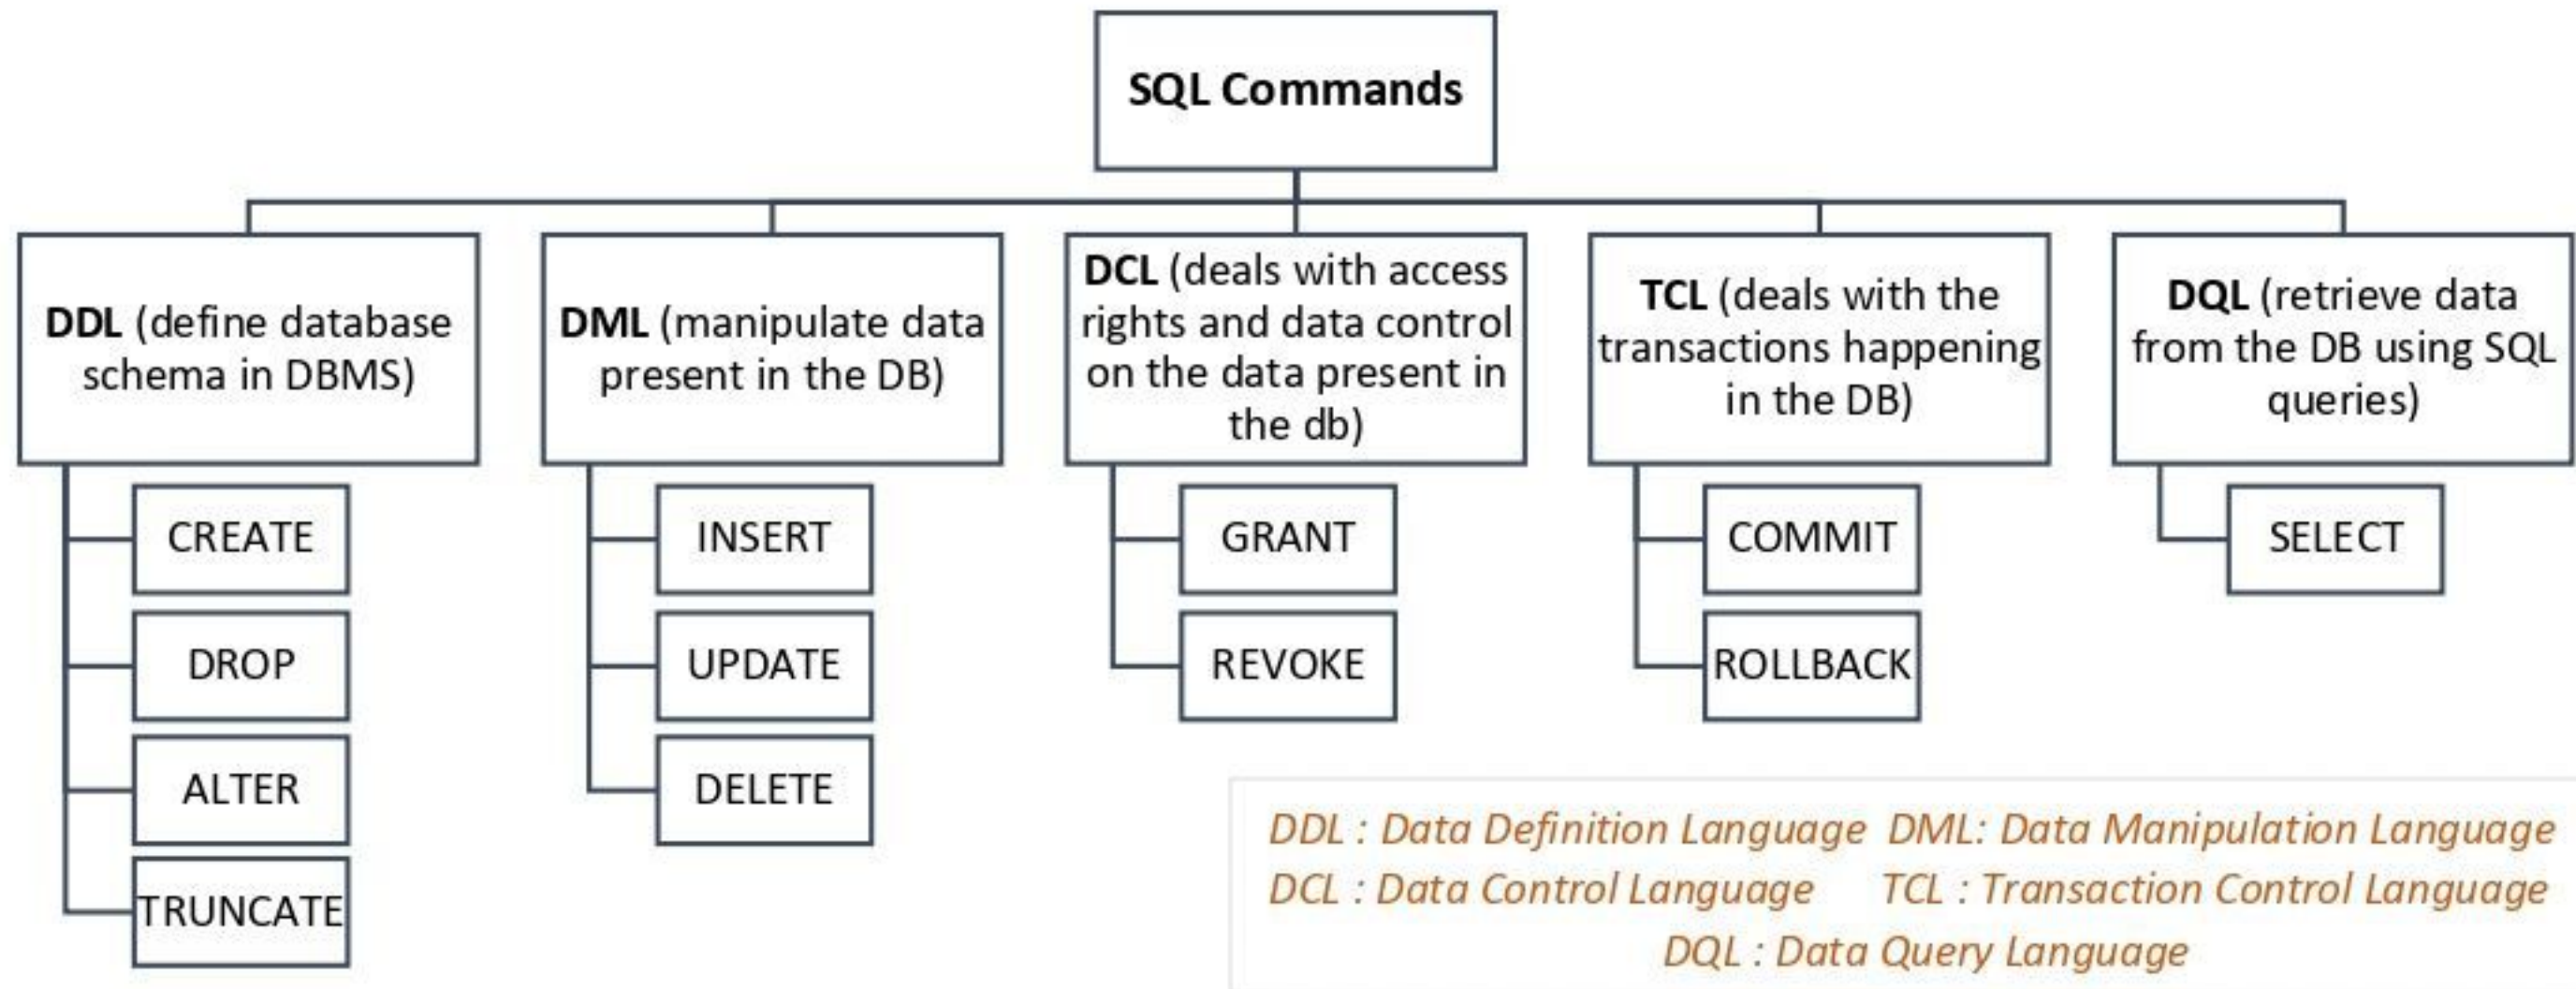

1. Create database	<code>create database SaleOrder</code>
2. Use the database	<code>use SaleOrder</code>
3. Create tables	<pre> create table dbo.customer ( CustomerID int NOT null primary key, CustomerFirstName varchar(50) NOT null, CustomerLastName varchar(50) NOT null, CustomerAddress varchar(50) NOT null, CustomerSuburb varchar(50) null, CustomerCity varchar(50) NOT null, CustomerPostCode char(4) null, CustomerPhoneNumber char(12) null, );  create table dbo.inventory ( InventoryID tinyint NOT null primary key, InventoryName varchar(50) NOT null, InventoryDescription varchar(255) null, );  create table dbo.employee ( EmployeeID tinyint NOT null primary key, EmployeeFirstName varchar(50) NOT null, EmployeeLastName varchar(50) NOT null, EmployeeExtension char(4) null, );  create table dbo.sale ( SaleID tinyint not null primary key, CustomerID int not null references customer(CustomerID), InventoryID tinyint not null references Inventory(InventoryID), EmployeeID tinyint not null references Employee(EmployeeID), SaleDate date not null, SaleQuantity int not null, SaleUnitPrice smallmoney not null ); </pre>
4. Check what table inside	<code>select * from information_schema.tables</code>
5. View specific row	<pre> --top: show only the first two select top 2 * from customer  --top 40 percent: also means show the first two select top 40 percent * from customer </pre>
6. View specific column	<pre> --sort result (by default is ascending) select customerfirstname, customerlastname from customer order by customerlastname desc  select customerfirstname, customerlastname from customer order by 4, 2, 3 desc -- Order By Based on column no. without typing column name  --distinct: only show unique value select distinct customerlastname from customer order by customerlastname </pre>





7. Save table to another table	<pre>--into file_name: save result in another table (BASE TABLE) select distinct customerlastname into temp from customer order by customerlastname  select * from temp --see the table (data type will remain)</pre>
8. Like (search something)	<pre>-- (underscore sign) _ is only specific for one character only -- (percent sign) % represents zero, one, or multiple characters select * from customer where customerlastname like '_r%'</pre>
9. In (search something)	<pre>-- search multiple items select * from customer where customerlastname in ('Brown', 'Michael', 'Jim')</pre>
10. > (search something)	<pre>select * from customer where customerlastname &gt; 'Brown' or customerlastname &gt; 'Cross'</pre>
11. <> (Not Equal)	<pre>select * from customer where customerlastname &lt;&gt; 'Brown'</pre>
12. IS NULL	<pre>-- check null values select * from customer where customerlastname IS NULL</pre>
13. IS NOT NULL	<pre>select * from customer where customerlastname IS NOT NULL</pre>
14. between	<pre>select * from sale where saleunitprice between 5 and 10 --not include 5 &amp; 10</pre>
15. count	<pre>-- returns the number of rows in a table -- AS means aliasing, temporary giving name to a column/ table select count(*) as [Number of Records] from customer where customerfirstname like 'B%'</pre>
16. sum	<pre>select sale.employeeid ,EmployeeFirstName, EmployeeLastName , count(*) as [Number of order] , sum(salequantity) as [Total Quantity] from sale,employee where sale.employeeid = employee.employeeid group by sale.employeeid ,EmployeeFirstName, EmployeeLastName</pre>
17. count month	<pre>select month(saledate) as [Month], count ( * ) as [Number of sale], sum(salequantity*saleunitprice) as [Total Amount] from sale group by month(saledate)</pre>
18. max	<pre>SELECT MAX(Salary) FROM EmployeeSalary</pre>
19. min	<pre>SELECT MIN(Salary) FROM EmployeeSalary</pre>
20. average	<pre>SELECT AVG(Salary) FROM EmployeeSalary</pre>





21. having	<pre>SELECT JobTitle, COUNT(JobTitle) FROM EmployeeDemographics ED JOIN EmployeeSalary ES     ON ED.EmployeeID = ES.EmployeeID GROUP BY JobTitle HAVING COUNT(JobTitle) &gt; 1  SELECT JobTitle, AVG(Salary) FROM EmployeeDemographics ED JOIN EmployeeSalary ES     ON ED.EmployeeID = ES.EmployeeID GROUP BY JobTitle HAVING AVG(Salary) &gt; 45000 ORDER BY AVG(Salary)</pre>																																																						
22. Change data type temporary for use	<pre>-- CAST(expression AS datatype(length)) SELECT CAST('2017-08-25 00:00:00.000' AS date)  -- CONVERT(data_type(length), expression, style) SELECT CONVERT(date, '2017-08-25 00:00:00.000')</pre>																																																						
23. CASE Statement	<pre>SELECT FirstName, LastName, Age, CASE     WHEN Age &gt; 30 THEN 'Old'     WHEN Age BETWEEN 27 AND 30 THEN 'Young'     ELSE 'Baby' END FROM EmployeeDemographics ED WHERE Age IS NOT NULL ORDER BY Age  -- SELECT FirstName, LastName, JobTitle, Salary, CASE     WHEN JobTitle = 'Salesman' THEN Salary + (Salary *.10)     WHEN JobTitle = 'Accountant' THEN Salary + (Salary *.05)     WHEN JobTitle = 'HR' THEN Salary + (Salary *.000001)     ELSE Salary + (Salary *.03) END AS SalaryAfterRaise FROM EmployeeDemographics ED JOIN EmployeeSalary ES ON ED.EmployeeID = ES.EmployeeID</pre>																																																						
24. Partition By --returns a single value for each row	<pre>SELECT FirstName, LastName, Gender, Salary, COUNT(Gender) OVER (PARTITION BY Gender) AS TotalGender FROM EmployeeDemographics ED JOIN EmployeeSalary ES ON ED.EmployeeID = ES.EmployeeID</pre> <table><thead><tr><th></th><th>FirstName</th><th>LastName</th><th>Gender</th><th>Salary</th><th>TotalGender</th></tr></thead><tbody><tr><td>1</td><td>Pam</td><td>Beasley</td><td>Female</td><td>36000</td><td>3</td></tr><tr><td>2</td><td>Angela</td><td>Martin</td><td>Female</td><td>47000</td><td>3</td></tr><tr><td>3</td><td>Meredith</td><td>Palmer</td><td>Female</td><td>41000</td><td>3</td></tr><tr><td>4</td><td>Stanley</td><td>Hudson</td><td>Male</td><td>48000</td><td>5</td></tr><tr><td>5</td><td>Kevin</td><td>Malone</td><td>Male</td><td>42000</td><td>5</td></tr><tr><td>6</td><td>Michael</td><td>Scott</td><td>Male</td><td>65000</td><td>5</td></tr><tr><td>7</td><td>Dwight</td><td>Schrute</td><td>Male</td><td>63000</td><td>5</td></tr><tr><td>8</td><td>Jim</td><td>Halpert</td><td>Male</td><td>45000</td><td>5</td></tr></tbody></table>		FirstName	LastName	Gender	Salary	TotalGender	1	Pam	Beasley	Female	36000	3	2	Angela	Martin	Female	47000	3	3	Meredith	Palmer	Female	41000	3	4	Stanley	Hudson	Male	48000	5	5	Kevin	Malone	Male	42000	5	6	Michael	Scott	Male	65000	5	7	Dwight	Schrute	Male	63000	5	8	Jim	Halpert	Male	45000	5
	FirstName	LastName	Gender	Salary	TotalGender																																																		
1	Pam	Beasley	Female	36000	3																																																		
2	Angela	Martin	Female	47000	3																																																		
3	Meredith	Palmer	Female	41000	3																																																		
4	Stanley	Hudson	Male	48000	5																																																		
5	Kevin	Malone	Male	42000	5																																																		
6	Michael	Scott	Male	65000	5																																																		
7	Dwight	Schrute	Male	63000	5																																																		
8	Jim	Halpert	Male	45000	5																																																		






25. String Functions	<pre>-- Remove space Select EmployeeID, TRIM(EmployeeID) AS IDTRIM FROM EmployeeErrors  Select EmployeeID, RTRIM(EmployeeID) as IDRTRIM FROM EmployeeErrors  Select EmployeeID, LTRIM(EmployeeID) as IDLTRIM FROM EmployeeErrors  -- Replace Select LastName, REPLACE(LastName, '- Fired', '') as LastNameFixed FROM EmployeeErrors  -- Substring Select Substring(err.FirstName,1,3), Substring(dem.FirstName,1,3), Substring(err.LastName,1,3), Substring(dem.LastName,1,3) FROM EmployeeErrors err JOIN EmployeeDemographics dem     on Substring(err.FirstName,1,3) =     Substring(dem.FirstName,1,3)     and Substring(err.LastName,1,3) =     Substring(dem.LastName,1,3)  -- UPPER and LOWER CASE Select firstname, LOWER(firstname) from EmployeeErrors  Select Firstname, UPPER(FirstName) from EmployeeErrors"</pre>
26. Stored Procedure	<pre>CREATE PROCEDURE Temp_Employee @JobTitle nvarchar(100) AS DROP TABLE IF EXISTS #temp_employee Create table #temp_employee ( JobTitle varchar(100), EmployeesPerJob int , AvgAge int, AvgSalary int )  Insert into #temp_employee SELECT JobTitle, Count(JobTitle), Avg(Age), AVG(salary) FROM EmployeeDemographics emp JOIN EmployeeSalary sal     ON emp.EmployeeID = sal.EmployeeID where JobTitle = @JobTitle --- make sure to change this in this script from original above group by JobTitle  Select * From #temp_employee GO;</pre>







	<pre>--- only need to run this on next time EXEC Temp_Employee @JobTitle = 'Salesman'</pre>																																													
27. Subquery	<pre>-- Subquery in Select SELECT EmployeeID, Salary, (SELECT AVG(Salary) FROM EmployeeSalary) AS AllAvgSalary FROM EmployeeSalary  -- with Partition By SELECT EmployeeID, Salary, AVG(Salary) OVER () AS AllAvgSalary FROM EmployeeSalary</pre> <table><thead><tr><th></th><th>EmployeeID</th><th>Salary</th><th>AllAvgSalary</th></tr></thead><tbody><tr><td>1</td><td>1001</td><td>45000</td><td>47909</td></tr><tr><td>2</td><td>1002</td><td>36000</td><td>47909</td></tr><tr><td>3</td><td>1003</td><td>63000</td><td>47909</td></tr><tr><td>4</td><td>1004</td><td>47000</td><td>47909</td></tr><tr><td>5</td><td>1005</td><td>50000</td><td>47909</td></tr></tbody></table> <pre>-- Subquery in From SELECT a.EmployeeID, AllAvgSalary FROM (SELECT EmployeeID, Salary, AVG(Salary) OVER () AS AllAvgSalary       FROM EmployeeSalary) a ORDER BY a.EmployeeID</pre> <table><thead><tr><th></th><th>EmployeeID</th><th>AllAvgSalary</th></tr></thead><tbody><tr><td>1</td><td>NULL</td><td>47909</td></tr><tr><td>2</td><td>1001</td><td>47909</td></tr><tr><td>3</td><td>1002</td><td>47909</td></tr><tr><td>4</td><td>1003</td><td>47909</td></tr><tr><td>5</td><td>1004</td><td>47909</td></tr><tr><td>6</td><td>1005</td><td>47909</td></tr></tbody></table> <pre>-- Subquery in Where SELECT EmployeeID, JobTitle, Salary FROM EmployeeSalary WHERE EmployeeID in (SELECT EmployeeID FROM EmployeeDemographics                      WHERE Age &gt; 30)  SELECT EmployeeID, JobTitle, Salary FROM EmployeeSalary WHERE Salary in (SELECT Max(Salary) FROM EmployeeSalary)</pre>		EmployeeID	Salary	AllAvgSalary	1	1001	45000	47909	2	1002	36000	47909	3	1003	63000	47909	4	1004	47000	47909	5	1005	50000	47909		EmployeeID	AllAvgSalary	1	NULL	47909	2	1001	47909	3	1002	47909	4	1003	47909	5	1004	47909	6	1005	47909
	EmployeeID	Salary	AllAvgSalary																																											
1	1001	45000	47909																																											
2	1002	36000	47909																																											
3	1003	63000	47909																																											
4	1004	47000	47909																																											
5	1005	50000	47909																																											
	EmployeeID	AllAvgSalary																																												
1	NULL	47909																																												
2	1001	47909																																												
3	1002	47909																																												
4	1003	47909																																												
5	1004	47909																																												
6	1005	47909																																												




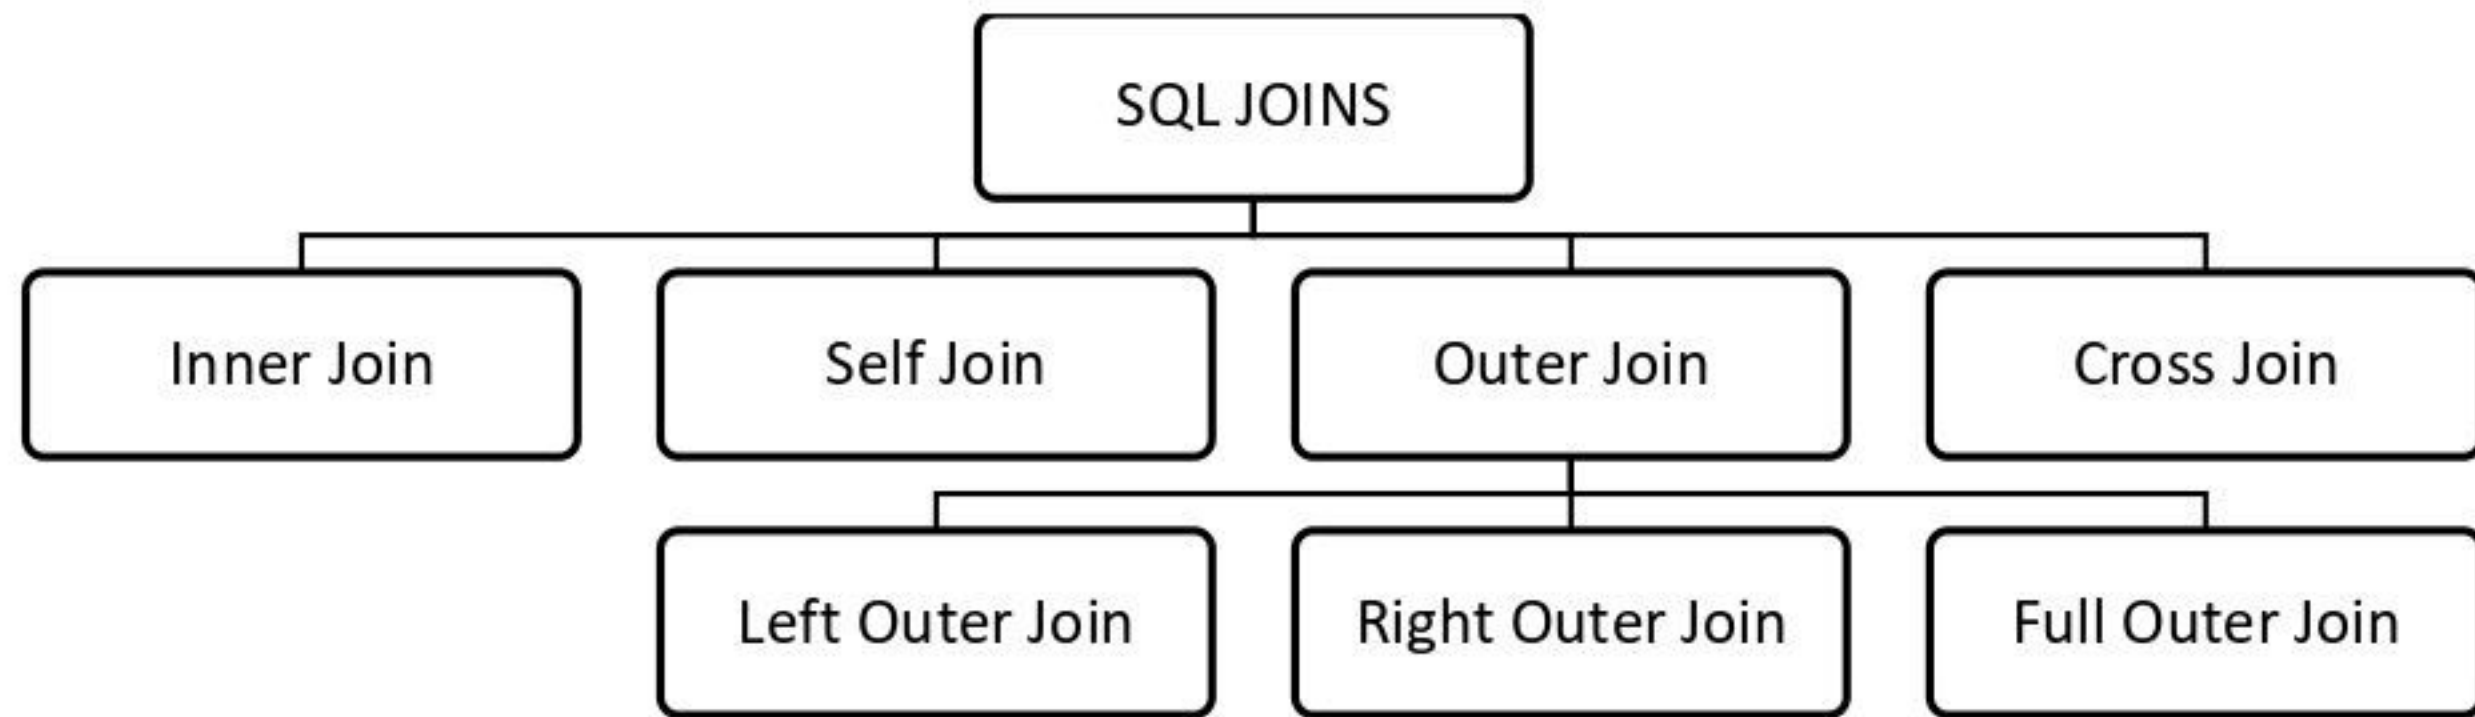

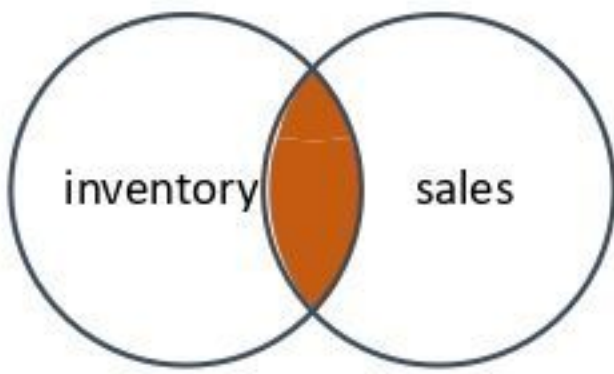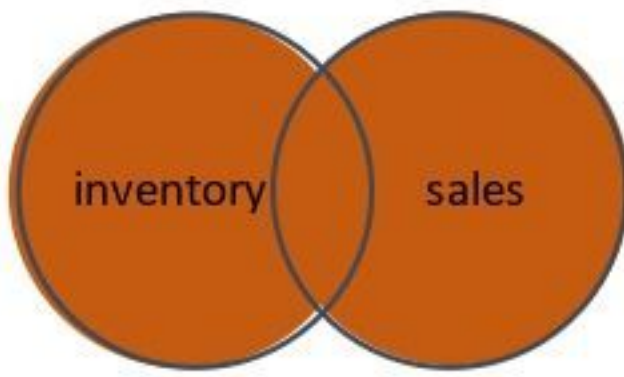
<p>1. getting data from multiple tables (explicit join - without using join command)</p>	<pre>select * from inventory,sale where sale.inventoryid=inventory.inventoryid</pre> <pre>select inventoryname,saledate,saleunitprice,salequantity,salequantity*saleunitprice as [Total amount] from sale,inventory where sale.inventoryid=inventory.inventoryid group by sale.inventoryid,inventoryname,saledate,salequantity,saleunitprice order by inventoryname</pre>
<p>2. getting data from multiple tables (implicit join - using join command)</p>	<pre>--inner join select * from inventory inner join sale on sale.inventoryid=inventory.inventoryid</pre> <pre>select inventoryname,saledate,saleunitprice,salequantity,saleunitprice*salequantity as [Total Amount] from inventory inner join sale on sale.inventoryid=inventory.inventoryid order by inventoryname</pre> <div data-bbox="1150 1804 1539 2041">  <p>A Venn diagram with two overlapping circles. The left circle is labeled 'inventory' and the right circle is labeled 'sales'. The intersection of the two circles is shaded in orange.</p> </div> <pre>--full outer join (shows everything) select sale.inventoryid,inventoryname from inventory full outer join sale on sale.inventoryid=inventory.inventoryid where sale.inventoryid is NULL</pre> <div data-bbox="1144 2507 1539 2745">  <p>A Venn diagram with two overlapping circles. The left circle is labeled 'inventory' and the right circle is labeled 'sales'. Both circles are shaded in orange, representing the union of the two sets.</p> </div>



--left join (might have NULL value, since some inventory might not have sales)  
 select inventory.inventoryid,inventoryname  
 from inventory left join sale on  
 sale.inventoryid=inventory.inventoryid

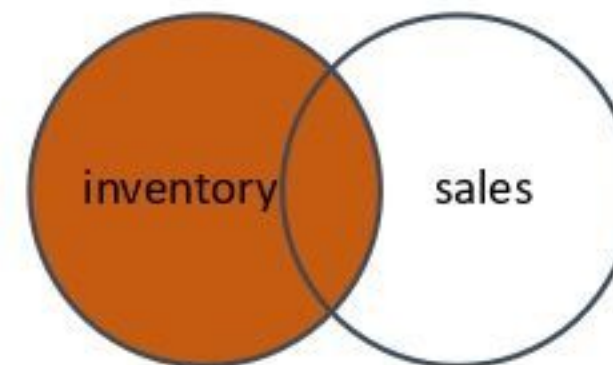


--left join  
 select inventory.inventoryid,inventoryname  
 from inventory left join sale on  
 sale.inventoryid=inventory.inventoryid  
 where sale.inventoryid is NULL

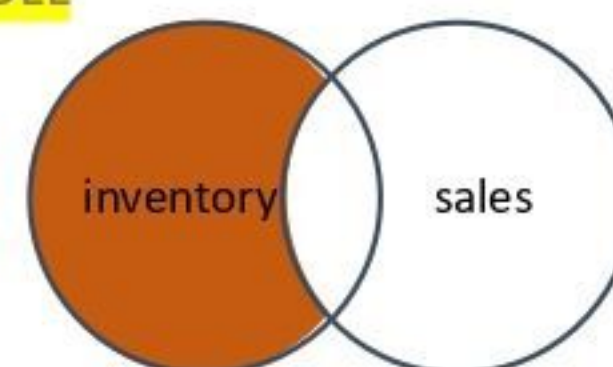

-- without join: use subquery  
 select inventoryid,inventoryname from inventory  
 where inventoryid not in (select inventoryid from sale)

--right join  
 select sale.inventoryid,inventoryname  
 from inventory right join sale on  
 sale.inventoryid=inventory.inventoryid

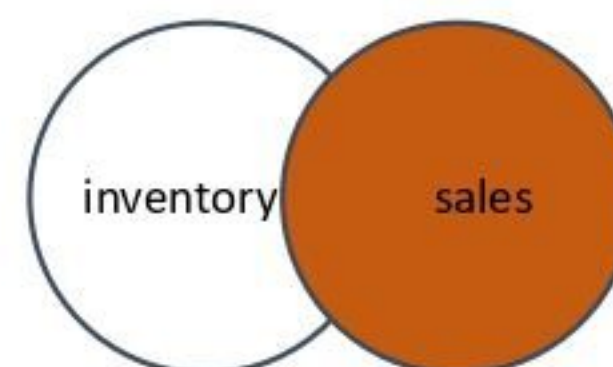

3. Self Join  
 --commonly used in processing  
 hierarchy


--inner join  
 Staff Table

employeeID	employeefirstname	employeelastname	managerID
1001	Tan	Mei Ling	NULL
1002	Kelvin	Koh	1001
1003	Amin	Wong	1002

select E.employeeID, E.employeefirstname+' '+E.employeelastname as [Full Name], E.managerID, , M.employeefirstname+' '+M.employeelastname as [Manager Name]  
 from staff E  
 inner join staff M  
 on E.managerID = M.employeeID


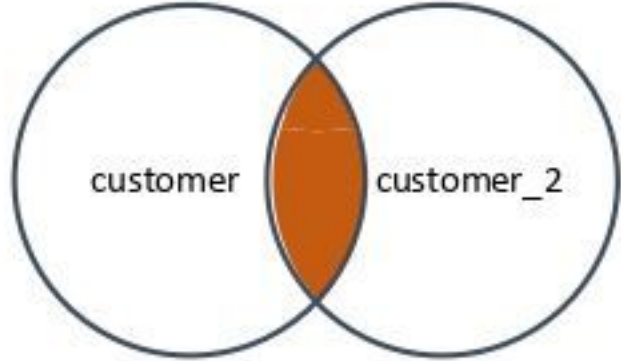
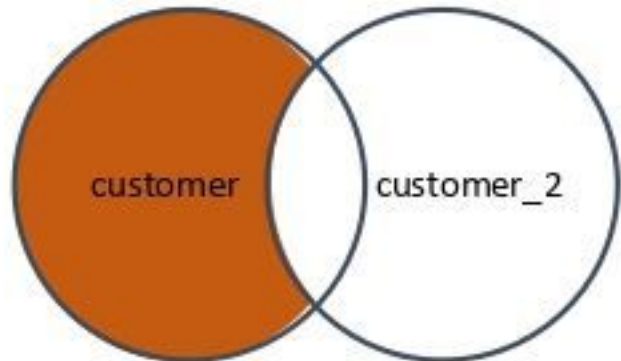


	<p>Output:</p> <table><tr><th>employeeID</th><th>Full Name</th><th>managerID</th><th>managerName</th></tr><tr><td>1002</td><td>Kelvin Koh</td><td>1001</td><td>Tan Mei Ling</td></tr><tr><td>1003</td><td>Amin Wong</td><td>1002</td><td>Kelvin Koh</td></tr></table> <p>--left outer join (list all the employees)</p> <pre>select E.employeeID, E.employeefirstname+' '+E.employeelastname as [F Name], E.managerID, , M.employeefirstname+' '+M.employeelastname as [Manager Name] from staff E left outer join staff M on E.managerID = M.employeeID</pre> <p>Output:</p> <table><tr><th>employeeID</th><th>Full Name</th><th>managerID</th><th>managerName</th></tr><tr><td>1001</td><td>Tan Mei Ling</td><td></td><td></td></tr><tr><td>1002</td><td>Kelvin Koh</td><td>1001</td><td>Tan Mei Ling</td></tr><tr><td>1003</td><td>Amin Wong</td><td>1002</td><td>Kelvin Koh</td></tr></table>	employeeID	Full Name	managerID	managerName	1002	Kelvin Koh	1001	Tan Mei Ling	1003	Amin Wong	1002	Kelvin Koh	employeeID	Full Name	managerID	managerName	1001	Tan Mei Ling			1002	Kelvin Koh	1001	Tan Mei Ling	1003	Amin Wong	1002	Kelvin Koh
employeeID	Full Name	managerID	managerName																										
1002	Kelvin Koh	1001	Tan Mei Ling																										
1003	Amin Wong	1002	Kelvin Koh																										
employeeID	Full Name	managerID	managerName																										
1001	Tan Mei Ling																												
1002	Kelvin Koh	1001	Tan Mei Ling																										
1003	Amin Wong	1002	Kelvin Koh																										
4. Cross Join --generate all combination of records (all possibility) (Cartesian Product)	<pre>select * from inventory1 cross join inventory2</pre>																												

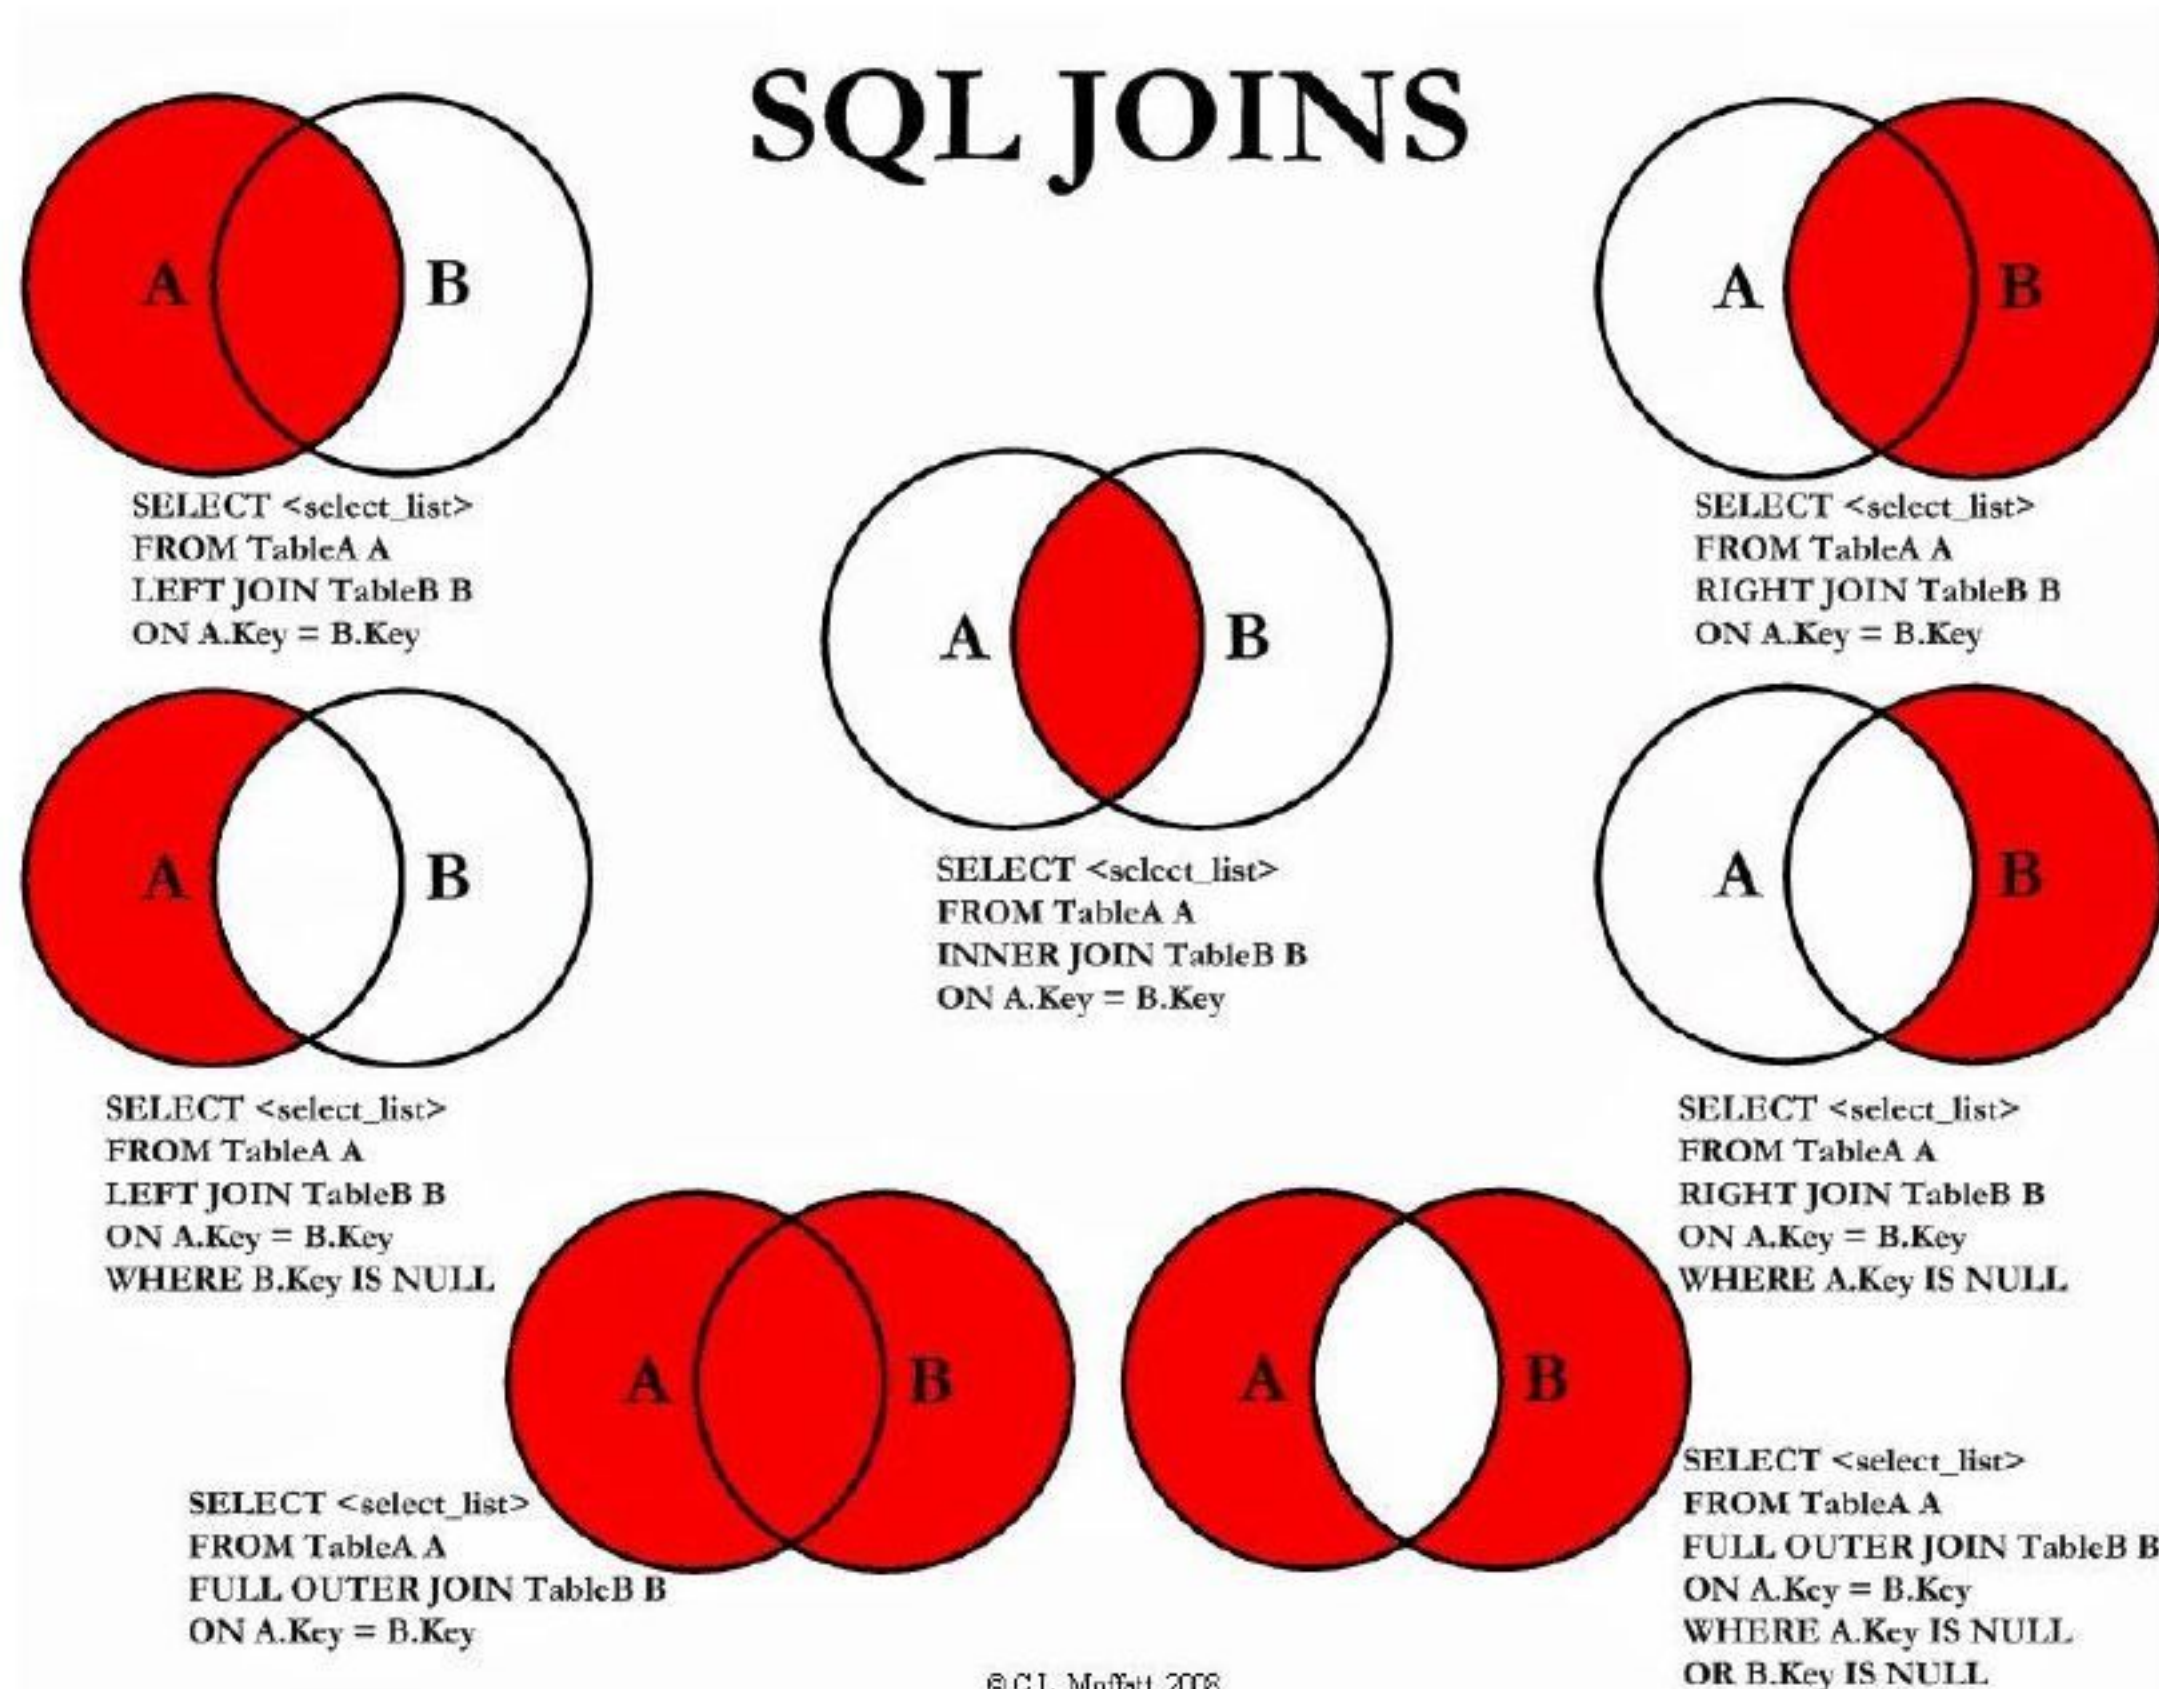




## SQL UNIONS

<p>1. Union</p> <p>--allow you to combine two tables together (but the no. of columns &amp; each column's data types for 2 tables must be match)</p> <p>--don't need common key, only need common attributes</p> <p>--merge, not showing duplicate record</p>	<pre>select cust_lname,cust_fname from customer union select cust_lname,cust_fname from customer_2</pre>
<p>2. Union all</p> <p>--merge, but show you everything, even the duplicate record</p>	<pre>select cust_lname,cust_fname from customer union all select cust_lname,cust_fname from customer_2</pre> 
<p>3. Intersect</p> <p>--keep only the rows in common to both query</p> <p>--not showing duplicate record</p>	<pre>select cust_lname,cust_fname from customer intersect select cust_lname,cust_fname from customer_2</pre>  <pre>select c.cust_lname,c.cust_fname from customer c,customer_2 c2 where c.cust_lname=c2.cust_lname and c.cust_fname=c2.cust_fname</pre>
<p>4. Except</p> <p>--generate only the records that are unique to the CUSTOMER table</p>	<pre>select cust_lname,cust_fname from customer except select cust_lname,cust_fname from customer_2</pre>  <p>--use subquery</p> <pre>select cust_lname,cust_fname from customer where(cust_lname) not in (select cust_lname from customer_2) and (cust_fname) not in (select cust_fname from customer_2)</pre>





## Table & View

<p>1. view table (view will be updated when update base) --view is a result set of SQL statements, exists only for a single query</p>	<pre>create view CustomerView as select customerfirstname+' '+customerlastname as [Customer Name] , customerphonenumber, inventoryname,saledate,salequantity,saleunitprice,salequantity*saleunitprice as [Total Amount] from customer inner join sale on customer.customerid=sale.customerid inner join inventory on sale.inventoryid=inventory.inventoryid</pre> 
<p>2. Temp table (temp will NOT be updated when update base) --a single hashtag (#) sign must be added in front of their names --used to store data temporarily, physically created in the Tempdb database --can perform CRUD, join, and some other operations like the persistent database tables</p>	<pre>DROP TABLE IF EXISTS #temp_Employee  Create table #temp_Employee ( JobTitle varchar(100), EmployeesPerJob int, AvgAge int, AvgSalary int )  Insert INTO #temp_Employee SELECT JobTitle, Count(JobTitle), Avg(Age), AVG(salary) FROM EmployeeDemographics emp JOIN EmployeeSalary sal ON emp.EmployeeID = sal.EmployeeID group by JobTitle  SELECT * FROM #temp_Employee</pre>
<p>3. CTE (Common Table Expression) --create temporary result set which is used to manipulate the complex sub-queries data --created in memory rather than Tempdb database, so cannot create any index on CTE.</p>	<pre>WITH CTE_Employee AS ( SELECT FirstName, LastName, Gender, Salary, COUNT(Gender) OVER (PARTITION BY Gender) AS TotalGender FROM EmployeeDemographics ED JOIN EmployeeSalary ES ON ED.EmployeeID = ES.EmployeeID WHERE Salary &gt; '45000' )  SELECT FirstName, LastName, Gender, TotalGender FROM CTE_Employee WHERE TotalGender = (SELECT MIN(TotalGender) FROM CTE_Employee)</pre>
<p>4. Duplicate Table</p>	<pre>select customerfirstname+' '+customerlastname as [Customer Name] , customerphonenumber, inventoryname,saledate,salequantity,saleunitprice,salequantity*saleunitprice as [Total Amount] into customerRec from customer inner join sale on customer.customerid=sale.customerid inner join inventory on sale.inventoryid=inventory.inventoryid order by customerfirstname+' '+customerlastname,inventoryname</pre>





## SQL RANKS

### 1. ROW\_NUMBER()

--get a unique sequential number for each row  
 --get **different** ranks for the row having similar values

```
SELECT *,
       ROW_NUMBER() OVER(ORDER BY Salary DESC) SalaryRank
FROM EmployeeSalary
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1006	Regional Manager	65000	1
2	1003	Salesman	63000	2
3	1005	HR	50000	3
4	1008	Salesman	48000	4
5	1004	Accountant	47000	5
6	1010	NULL	47000	6
7	1001	Salesman	45000	7
8	NULL	Salesman	43000	8
9	1009	Accountant	42000	9
10	1007	Supplier Relations	41000	10
11	1002	Receptionist	36000	11

### 2. RANK()

--specify rank for each row in the result set  
 --use PARTITION BY to performs calculation on each group  
 --each subset get rank as per Salary in descending order

#### USING PARTITION BY

```
SELECT *,
       RANK() OVER(PARTITION BY JobTitle ORDER BY Salary DESC)
SalaryRank
FROM EmployeeSalary
ORDER BY JobTitle, SalaryRank
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1010	NULL	47000	1
2	1004	Accountant	47000	1
3	1009	Accountant	42000	2
4	1005	HR	50000	1
5	1002	Receptionist	36000	1
6	1006	Regional Manager	65000	1
7	1003	Salesman	63000	1
8	1008	Salesman	48000	2
9	1001	Salesman	45000	3
10	NULL	Salesman	43000	4
11	1007	Supplier Relations	41000	1

#### NOT USING PARTITION BY

-- get **SAME** ranks for the row having similar values

```
SELECT *,
       RANK() OVER(ORDER BY Salary DESC) SalaryRank
FROM EmployeeSalary
ORDER BY SalaryRank
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1006	Regional Manager	65000	1
2	1003	Salesman	63000	2
3	1005	HR	50000	3
4	1008	Salesman	48000	4
5	1004	Accountant	47000	5
6	1010	NULL	47000	5
7	1001	Salesman	45000	7
8	NULL	Salesman	43000	8
9	1009	Accountant	42000	9
10	1007	Supplier Relations	41000	10
11	1002	Receptionist	36000	11





## 3. DENSE\_RANK()

-- if have duplicate values, SQL assigns different ranks to those rows.  
 -- will get the same rank for duplicate or similar values

```
SELECT *,
       DENSE_RANK() OVER(ORDER BY Salary DESC) SalaryRank
FROM EmployeeSalary
ORDER BY SalaryRank
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1006	Regional Manager	65000	1
2	1003	Salesman	63000	2
3	1005	HR	50000	3
4	1008	Salesman	48000	4
5	1004	Accountant	47000	5
6	1010	NULL	47000	5
7	1001	Salesman	45000	6
8	NULL	Salesman	43000	7
9	1009	Accountant	42000	8
10	1007	Supplier Relations	41000	9
11	1002	Receptionist	36000	10

## RANK()

```
SELECT *,
       RANK() OVER(PARTITION BY JobTitle ORDER
BY Salary DESC) SalaryRank
FROM EmployeeSalary
ORDER BY JobTitle, SalaryRank
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1010	NULL	47000	1
2	1004	Accountant	47000	1
3	1009	Accountant	42000	2
4	1005	HR	50000	1
5	1002	Receptionist	36000	1
6	1006	Regional Manager	65000	1
7	1003	Salesman	63000	1
8	1001	Salesman	48000	2
9	1008	Salesman	48000	2
10	NULL	Salesman	43000	4
11	1007	Supplier Relations	41000	1

-- skip a rank if have similar values

## DENSE\_RANK()

```
SELECT *,
       DENSE_RANK() OVER(PARTITION BY JobTitle
ORDER BY Salary DESC) SalaryRank
FROM EmployeeSalary
ORDER BY JobTitle, SalaryRank
```

	EmployeeID	JobTitle	Salary	SalaryRank
1	1010	NULL	47000	1
2	1004	Accountant	47000	1
3	1009	Accountant	42000	2
4	1005	HR	50000	1
5	1002	Receptionist	36000	1
6	1006	Regional Manager	65000	1
7	1003	Salesman	63000	1
8	1001	Salesman	48000	2
9	1008	Salesman	48000	2
10	NULL	Salesman	43000	3
11	1007	Supplier Relations	41000	1

-- maintains the rank and does not give any gap  
 for the values





## 4. NTILE()

-- can specify required how many group of result, and it will rank accordingly

```
SELECT *,
        NTILE(3) OVER(ORDER BY Salary DESC) SalaryRank
FROM EmployeeSalary
ORDER BY SalaryRank;
```

	EmployeeID	JobTitle	Salary	SalaryRank	
1	1006	Regional Manager	65000	1	
2	1003	Salesman	63000	1	
3	1005	HR	50000	1	
4	1001	Salesman	48000	1	← Group 1
5	1008	Salesman	48000	2	
6	1004	Accountant	47000	2	← Group 2
7	1010	NULL	47000	2	
8	NULL	Salesman	43000	2	
9	1009	Accountant	42000	3	
10	1007	Supplier Relations	41000	3	← Group 3
11	1002	Receptionist	36000	3	

**USING PARTITION BY**

```
SELECT *,
        NTILE(3) OVER(PARTITION BY JobTitle ORDER BY Salary DESC)
SalaryRank
FROM EmployeeSalary
ORDER BY JobTitle, SalaryRank;
```

	EmployeeID	JobTitle	Salary	SalaryRank	
1	1010	NULL	47000	1	
2	1004	Accountant	47000	1	
3	1009	Accountant	42000	2	
4	1005	HR	50000	1	
5	1002	Receptionist	36000	1	
6	1006	Regional Manager	65000	1	
7	1003	Salesman	63000	1	← Group 1
8	1001	Salesman	48000	1	← Group 2
9	1008	Salesman	48000	2	← Group 3
10	NULL	Salesman	43000	3	
11	1007	Supplier Relations	41000	1	





1. Write the query to show the invoice number, the customer number, the customer name, the invoice date, and the invoice amount for all customers with a customer balance of \$1,000 or more.	<pre>select invoice_num,c.cust_num,c.cust_lname,c.cust_fname,inv_date,inv_amount from customer c, invoice where c.cust_num=invoice.cust_num and cust_balance&gt;=1000</pre> <pre>select invoice_num,c.cust_num,cust_lname+' '+cust_fname as [Name],inv_date,inv_amount from customer c join invoice i on c.cust_num=i.cust_num where cust_balance&gt;=1000</pre>																																																
2. ISNULL(expression, value) --expression: to test whether is NULL, value: to return if expression is NULL	<p>--ParcelID is same, but UniqueID is different; can assume that if the ParcelID is same, the Property Address will be same</p> <pre>Select a.ParcelID, a.PropertyAddress, b.ParcelID, b.PropertyAddress, ISNULL(a.PropertyAddress,b.PropertyAddress) From NashvilleHousing a JOIN NashvilleHousing b on a.ParcelID = b.ParcelID AND a.[UniqueID] &lt;&gt; b.[UniqueID] Where a.PropertyAddress is null</pre> <table><tr><th></th><th>ParcelID</th><th>PropertyAddress</th><th>ParcelID</th><th>PropertyAddress</th><th>(No column name)</th></tr><tr><td>1</td><td>025 07 0 031.00</td><td>NULL</td><td>025 07 0 031.00</td><td>410 ROSEHILL CT, GOODLETTSVILLE</td><td>410 ROSEHILL CT, GOODLETTSVILLE</td></tr><tr><td>2</td><td>026 01 0 069.00</td><td>NULL</td><td>026 01 0 069.00</td><td>141 TWO MILE PIKE, GOODLETTSVILLE</td><td>141 TWO MILE PIKE, GOODLETTSVILLE</td></tr><tr><td>3</td><td>026 05 0 017.00</td><td>NULL</td><td>026 05 0 017.00</td><td>208 EAST AVE, GOODLETTSVILLE</td><td>208 EAST AVE, GOODLETTSVILLE</td></tr><tr><td>4</td><td>026 06 0A 038.00</td><td>NULL</td><td>026 06 0A 038.00</td><td>109 CANTON CT, GOODLETTSVILLE</td><td>109 CANTON CT, GOODLETTSVILLE</td></tr><tr><td>5</td><td>033 06 0 041.00</td><td>NULL</td><td>033 06 0 041.00</td><td>1129 CAMPBELL RD, GOODLETTSVILLE</td><td>1129 CAMPBELL RD, GOODLETTSVILLE</td></tr><tr><td>6</td><td>033 06 0A 002.00</td><td>NULL</td><td>033 06 0A 002.00</td><td>1116 CAMPBELL RD, GOODLETTSVILLE</td><td>1116 CAMPBELL RD, GOODLETTSVILLE</td></tr><tr><td>7</td><td>033 15 0 123.00</td><td>NULL</td><td>033 15 0 123.00</td><td>438 W CAMPBELL RD, GOODLETTSVILLE</td><td>438 W CAMPBELL RD, GOODLETTSVILLE</td></tr></table> <p>-- Update record</p> <pre>Update a SET PropertyAddress = ISNULL(a.PropertyAddress,b.PropertyAddress) From NashvilleHousing a JOIN NashvilleHousing b on a.ParcelID = b.ParcelID AND a.[UniqueID] &lt;&gt; b.[UniqueID] Where a.PropertyAddress is null</pre>		ParcelID	PropertyAddress	ParcelID	PropertyAddress	(No column name)	1	025 07 0 031.00	NULL	025 07 0 031.00	410 ROSEHILL CT, GOODLETTSVILLE	410 ROSEHILL CT, GOODLETTSVILLE	2	026 01 0 069.00	NULL	026 01 0 069.00	141 TWO MILE PIKE, GOODLETTSVILLE	141 TWO MILE PIKE, GOODLETTSVILLE	3	026 05 0 017.00	NULL	026 05 0 017.00	208 EAST AVE, GOODLETTSVILLE	208 EAST AVE, GOODLETTSVILLE	4	026 06 0A 038.00	NULL	026 06 0A 038.00	109 CANTON CT, GOODLETTSVILLE	109 CANTON CT, GOODLETTSVILLE	5	033 06 0 041.00	NULL	033 06 0 041.00	1129 CAMPBELL RD, GOODLETTSVILLE	1129 CAMPBELL RD, GOODLETTSVILLE	6	033 06 0A 002.00	NULL	033 06 0A 002.00	1116 CAMPBELL RD, GOODLETTSVILLE	1116 CAMPBELL RD, GOODLETTSVILLE	7	033 15 0 123.00	NULL	033 15 0 123.00	438 W CAMPBELL RD, GOODLETTSVILLE	438 W CAMPBELL RD, GOODLETTSVILLE
	ParcelID	PropertyAddress	ParcelID	PropertyAddress	(No column name)																																												
1	025 07 0 031.00	NULL	025 07 0 031.00	410 ROSEHILL CT, GOODLETTSVILLE	410 ROSEHILL CT, GOODLETTSVILLE																																												
2	026 01 0 069.00	NULL	026 01 0 069.00	141 TWO MILE PIKE, GOODLETTSVILLE	141 TWO MILE PIKE, GOODLETTSVILLE																																												
3	026 05 0 017.00	NULL	026 05 0 017.00	208 EAST AVE, GOODLETTSVILLE	208 EAST AVE, GOODLETTSVILLE																																												
4	026 06 0A 038.00	NULL	026 06 0A 038.00	109 CANTON CT, GOODLETTSVILLE	109 CANTON CT, GOODLETTSVILLE																																												
5	033 06 0 041.00	NULL	033 06 0 041.00	1129 CAMPBELL RD, GOODLETTSVILLE	1129 CAMPBELL RD, GOODLETTSVILLE																																												
6	033 06 0A 002.00	NULL	033 06 0A 002.00	1116 CAMPBELL RD, GOODLETTSVILLE	1116 CAMPBELL RD, GOODLETTSVILLE																																												
7	033 15 0 123.00	NULL	033 15 0 123.00	438 W CAMPBELL RD, GOODLETTSVILLE	438 W CAMPBELL RD, GOODLETTSVILLE																																												
3. Split by delimiter  ❖ SUBSTRING(string, start, length)  ❖ CHARINDEX(substring, string, start)  ❖ LEN(string)	<pre>SELECT PropertyAddress, SUBSTRING(PropertyAddress, 1, CHARINDEX(',',PropertyAddress) -1 ) as Address , SUBSTRING(PropertyAddress, CHARINDEX(',',PropertyAddress) + 1 , LEN(PropertyAddress)) as City From NashvilleHousing</pre> <table><tr><th></th><th>PropertyAddress</th><th>Address</th><th>City</th></tr><tr><td>1</td><td>1808 FOX CHASE DR, GOODLETTSVILLE</td><td>1808 FOX CHASE DR</td><td>GOODLETTSVILLE</td></tr><tr><td>2</td><td>1832 FOX CHASE DR, GOODLETTSVILLE</td><td>1832 FOX CHASE DR</td><td>GOODLETTSVILLE</td></tr><tr><td>3</td><td>1864 FOX CHASE DR, GOODLETTSVILLE</td><td>1864 FOX CHASE DR</td><td>GOODLETTSVILLE</td></tr><tr><td>4</td><td>1853 FOX CHASE DR, GOODLETTSVILLE</td><td>1853 FOX CHASE DR</td><td>GOODLETTSVILLE</td></tr><tr><td>5</td><td>1829 FOX CHASE DR, GOODLETTSVILLE</td><td>1829 FOX CHASE DR</td><td>GOODLETTSVILLE</td></tr></table> <pre>ALTER TABLE NashvilleHousing Add PropertySplitAddress Nvarchar(255);  ALTER TABLE NashvilleHousing Add PropertySplitCity Nvarchar(255);</pre>		PropertyAddress	Address	City	1	1808 FOX CHASE DR, GOODLETTSVILLE	1808 FOX CHASE DR	GOODLETTSVILLE	2	1832 FOX CHASE DR, GOODLETTSVILLE	1832 FOX CHASE DR	GOODLETTSVILLE	3	1864 FOX CHASE DR, GOODLETTSVILLE	1864 FOX CHASE DR	GOODLETTSVILLE	4	1853 FOX CHASE DR, GOODLETTSVILLE	1853 FOX CHASE DR	GOODLETTSVILLE	5	1829 FOX CHASE DR, GOODLETTSVILLE	1829 FOX CHASE DR	GOODLETTSVILLE																								
	PropertyAddress	Address	City																																														
1	1808 FOX CHASE DR, GOODLETTSVILLE	1808 FOX CHASE DR	GOODLETTSVILLE																																														
2	1832 FOX CHASE DR, GOODLETTSVILLE	1832 FOX CHASE DR	GOODLETTSVILLE																																														
3	1864 FOX CHASE DR, GOODLETTSVILLE	1864 FOX CHASE DR	GOODLETTSVILLE																																														
4	1853 FOX CHASE DR, GOODLETTSVILLE	1853 FOX CHASE DR	GOODLETTSVILLE																																														
5	1829 FOX CHASE DR, GOODLETTSVILLE	1829 FOX CHASE DR	GOODLETTSVILLE																																														





<div>❖ PARSENAME('object_name', object_piece) --numbering works from right to left</div> <div>❖ REPLACE(string, old_string, new_string)</div>	<div>Update NashvilleHousing SET PropertySplitAddress = SUBSTRING(PropertyAddress, 1, CHARINDEX(',', PropertyAddress) -1 )</div> <div>Update NashvilleHousing SET PropertySplitCity = SUBSTRING(PropertyAddress, CHARINDEX(',', PropertyAddress) + 1 , LEN(PropertyAddress))</div> <div>Select OwnerAddress, PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 3) , PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 2) , PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 1) From NashvilleHousing</div> <table><thead><tr><th></th><th>OwnerAddress</th><th>(No column name)</th><th>(No column name)</th><th>(No column name)</th></tr></thead><tbody><tr><td>1</td><td>1808 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1808 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr><tr><td>2</td><td>1832 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1832 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr><tr><td>3</td><td>1864 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1864 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr><tr><td>4</td><td>1853 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1853 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr><tr><td>5</td><td>1829 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1829 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr><tr><td>6</td><td>1821 FOX CHASE DR, GOODLETTSVILLE, TN</td><td>1821 FOX CHASE DR</td><td>GOODLETTSVILLE</td><td>TN</td></tr></tbody></table> <div>ALTER TABLE NashvilleHousing Add OwnerSplitAddress Nvarchar(255); ALTER TABLE NashvilleHousing Add OwnerSplitCity Nvarchar(255); ALTER TABLE NashvilleHousing Add OwnerSplitState Nvarchar(255);</div> <div>Update NashvilleHousing SET OwnerSplitAddress = PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 3)</div> <div>Update NashvilleHousing SET OwnerSplitCity = PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 2)</div> <div>Update NashvilleHousing SET OwnerSplitState = PARSENAME(REPLACE(OwnerAddress, ',', '.')) , 1)</div>		OwnerAddress	(No column name)	(No column name)	(No column name)	1	1808 FOX CHASE DR, GOODLETTSVILLE, TN	1808 FOX CHASE DR	GOODLETTSVILLE	TN	2	1832 FOX CHASE DR, GOODLETTSVILLE, TN	1832 FOX CHASE DR	GOODLETTSVILLE	TN	3	1864 FOX CHASE DR, GOODLETTSVILLE, TN	1864 FOX CHASE DR	GOODLETTSVILLE	TN	4	1853 FOX CHASE DR, GOODLETTSVILLE, TN	1853 FOX CHASE DR	GOODLETTSVILLE	TN	5	1829 FOX CHASE DR, GOODLETTSVILLE, TN	1829 FOX CHASE DR	GOODLETTSVILLE	TN	6	1821 FOX CHASE DR, GOODLETTSVILLE, TN	1821 FOX CHASE DR	GOODLETTSVILLE	TN
	OwnerAddress	(No column name)	(No column name)	(No column name)																																
1	1808 FOX CHASE DR, GOODLETTSVILLE, TN	1808 FOX CHASE DR	GOODLETTSVILLE	TN																																
2	1832 FOX CHASE DR, GOODLETTSVILLE, TN	1832 FOX CHASE DR	GOODLETTSVILLE	TN																																
3	1864 FOX CHASE DR, GOODLETTSVILLE, TN	1864 FOX CHASE DR	GOODLETTSVILLE	TN																																
4	1853 FOX CHASE DR, GOODLETTSVILLE, TN	1853 FOX CHASE DR	GOODLETTSVILLE	TN																																
5	1829 FOX CHASE DR, GOODLETTSVILLE, TN	1829 FOX CHASE DR	GOODLETTSVILLE	TN																																
6	1821 FOX CHASE DR, GOODLETTSVILLE, TN	1821 FOX CHASE DR	GOODLETTSVILLE	TN																																
5. Remove duplicate records	<div>WITH RowNumCTE AS( Select *, ROW_NUMBER() OVER ( PARTITION BY ParcelID, PropertyAddress, SalePrice, SaleDate, LegalReference ORDER BY UniqueID) as row_num From NashvilleHousing order by ParcelID ) --DELETE Select * From RowNumCTE Where row_num &gt; 1 Order by PropertyAddress</div>																																			