12/16/24, 4:34 AM USACO

USA Computing Olympiad


Overview

DETAILS / FAQ

TRAINING

History


Resources



USACO 2024 DECEMBER CONTEST, BRONZE PROBLEM 3. It's MOOIN' TIME

Return to Problem List

Time Remaining: 1 hrs, 00 min, 03 sec

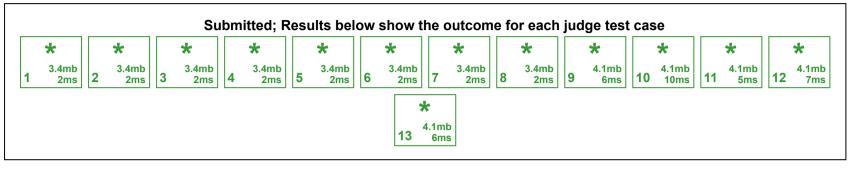

English (en) 🗸

Farmer John is trying to describe his favorite USACO contest to Elsie, but she is having trouble understanding why he likes it so much. He says "My favorite part of the contest was when Bessie said 'It's Mooin' Time' and mooed all over the contest."

Elsie still doesn't understand so Farmer John downloads the contest as a text file and tries to explain what he means. The contest is defined as a string of lowercase letters of length N ($3 \le N \le 20\,000$). A moo is generally defined as the substring $c_ic_jc_j$ where some character c_i followed directly by 2 occurrences of some character c_j where $c_i \ne c_j$. According to Farmer John, Bessie moos a lot, so if some moo appears at least F ($1 \le F \le N$) times in the contest, that might be from Bessie.

However, Farmer John's download might have been corrupted, and the text file might have up to one character that differs from the original file. Print all possible moos that Bessie could have made taking the potential error into account, sorted in alphabetical order.

INPUT FORMAT (input arrives from the terminal / stdin):

The first line contains N and F, representing the length of the string and the frequency threshold for a moo by Bessie.

The second line contains a string of lowercase letters of length N, representing the contest.

OUTPUT FORMAT (print output to the terminal / stdout):

Print out the number of possible moos that Bessie makes, followed by a lexicographically sorted list of the moos. Each moo should appear on a separate line.

SAMPLE INPUT:

10 2

zzmoozzmoo

SAMPLE OUTPUT:

1

In this case, no character change affects the answer. The only moo Bessie made was "moo".

SAMPLE INPUT:

17 2

momoobaaaaaqqqcqq

SAMPLE OUTPUT:

3

aqq baa

cqq

In this case, the a at position 8 (zero-indexed) could have been corrupted from a b which would have resulted in "baa" being a moo that Bessie made twice. Alternatively, the q at position 11 could have been corrupted from a c which would have resulted in "cqq" being a possible moo that Bessie made. "aqq" can be made by swapping the c with an a.

SAMPLE INPUT:

3 1

SAMPLE OUTPUT:

25

aoo

boo

coo doo

eoo

12/16/24, 4:34 AM

USACO
100
g00
hoo
100
joo
koo
loo
moo
noo
poo
qoo
roo
500
too
u00
V00
W00
X00
y00
Z00
SCORING:
• Inputs 4-8: N ≤ 100
Inputs 9-13: No additional constraints.
Problem credits: Suhas Nagar
Language: C V
Source File: Choose File No file chosen
Submit Solution
Dravious Submissions:
Previous Submissions:

<u>Sun, Dec 15, 2024 17:50:20 EST (C++17)</u> <u>Sun, Dec 15, 2024 17:58:39 EST (C++17)</u>