

EXPLORER

OPEN EDITORS

IOT-BOOTCAMP

> folder-1

Show All Commands **Ctrl** + **Shift** + **P**

Go to File **Ctrl** + **P**

Open Chat **Ctrl** + **Alt** + **I**

Open Settings **Ctrl** + **,**

Find in Files **Ctrl** + **Shift** + **F**

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

POSTMAN CONSOLE


PS C:\Users\Menson\Desktop\IOT-Bootcamp> **mkdir** folder-1

Directory: C:\Users\Menson\Desktop\IOT-Bootcamp

Mode	LastWriteTime	Length	Name
d----	8/10/2025 10:22 PM		folder-1

PS C:\Users\Menson\Desktop\IOT-Bootcamp>

> OUTLINE

EXPLORER


OPEN EDITORS

IOT-BOOTCAMP

> folder-1

OUTLINE

TIMELINE



Show All CommandsCtrl + Shift + P

Go to FileCtrl + P

Open ChatCtrl + Alt + I

Open SettingsCtrl + ,

Find in FilesCtrl + Shift + F

PROBLEMSOUTPUTDEBUG CONSOLETERMINALPORTSPOSTMAN CONSOLE

pwsh - folder-1

d----8/10/2025 10:22 PMfolder-1


PS C:\Users\Menson\Desktop\IOT-Bootcamp> cd folder-1


PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> mkdir folder-1.1

Directory: C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1

Mode	LastWriteTime	Length	Name
d----	8/10/2025 10:24 PM		folder-1.1

PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1>

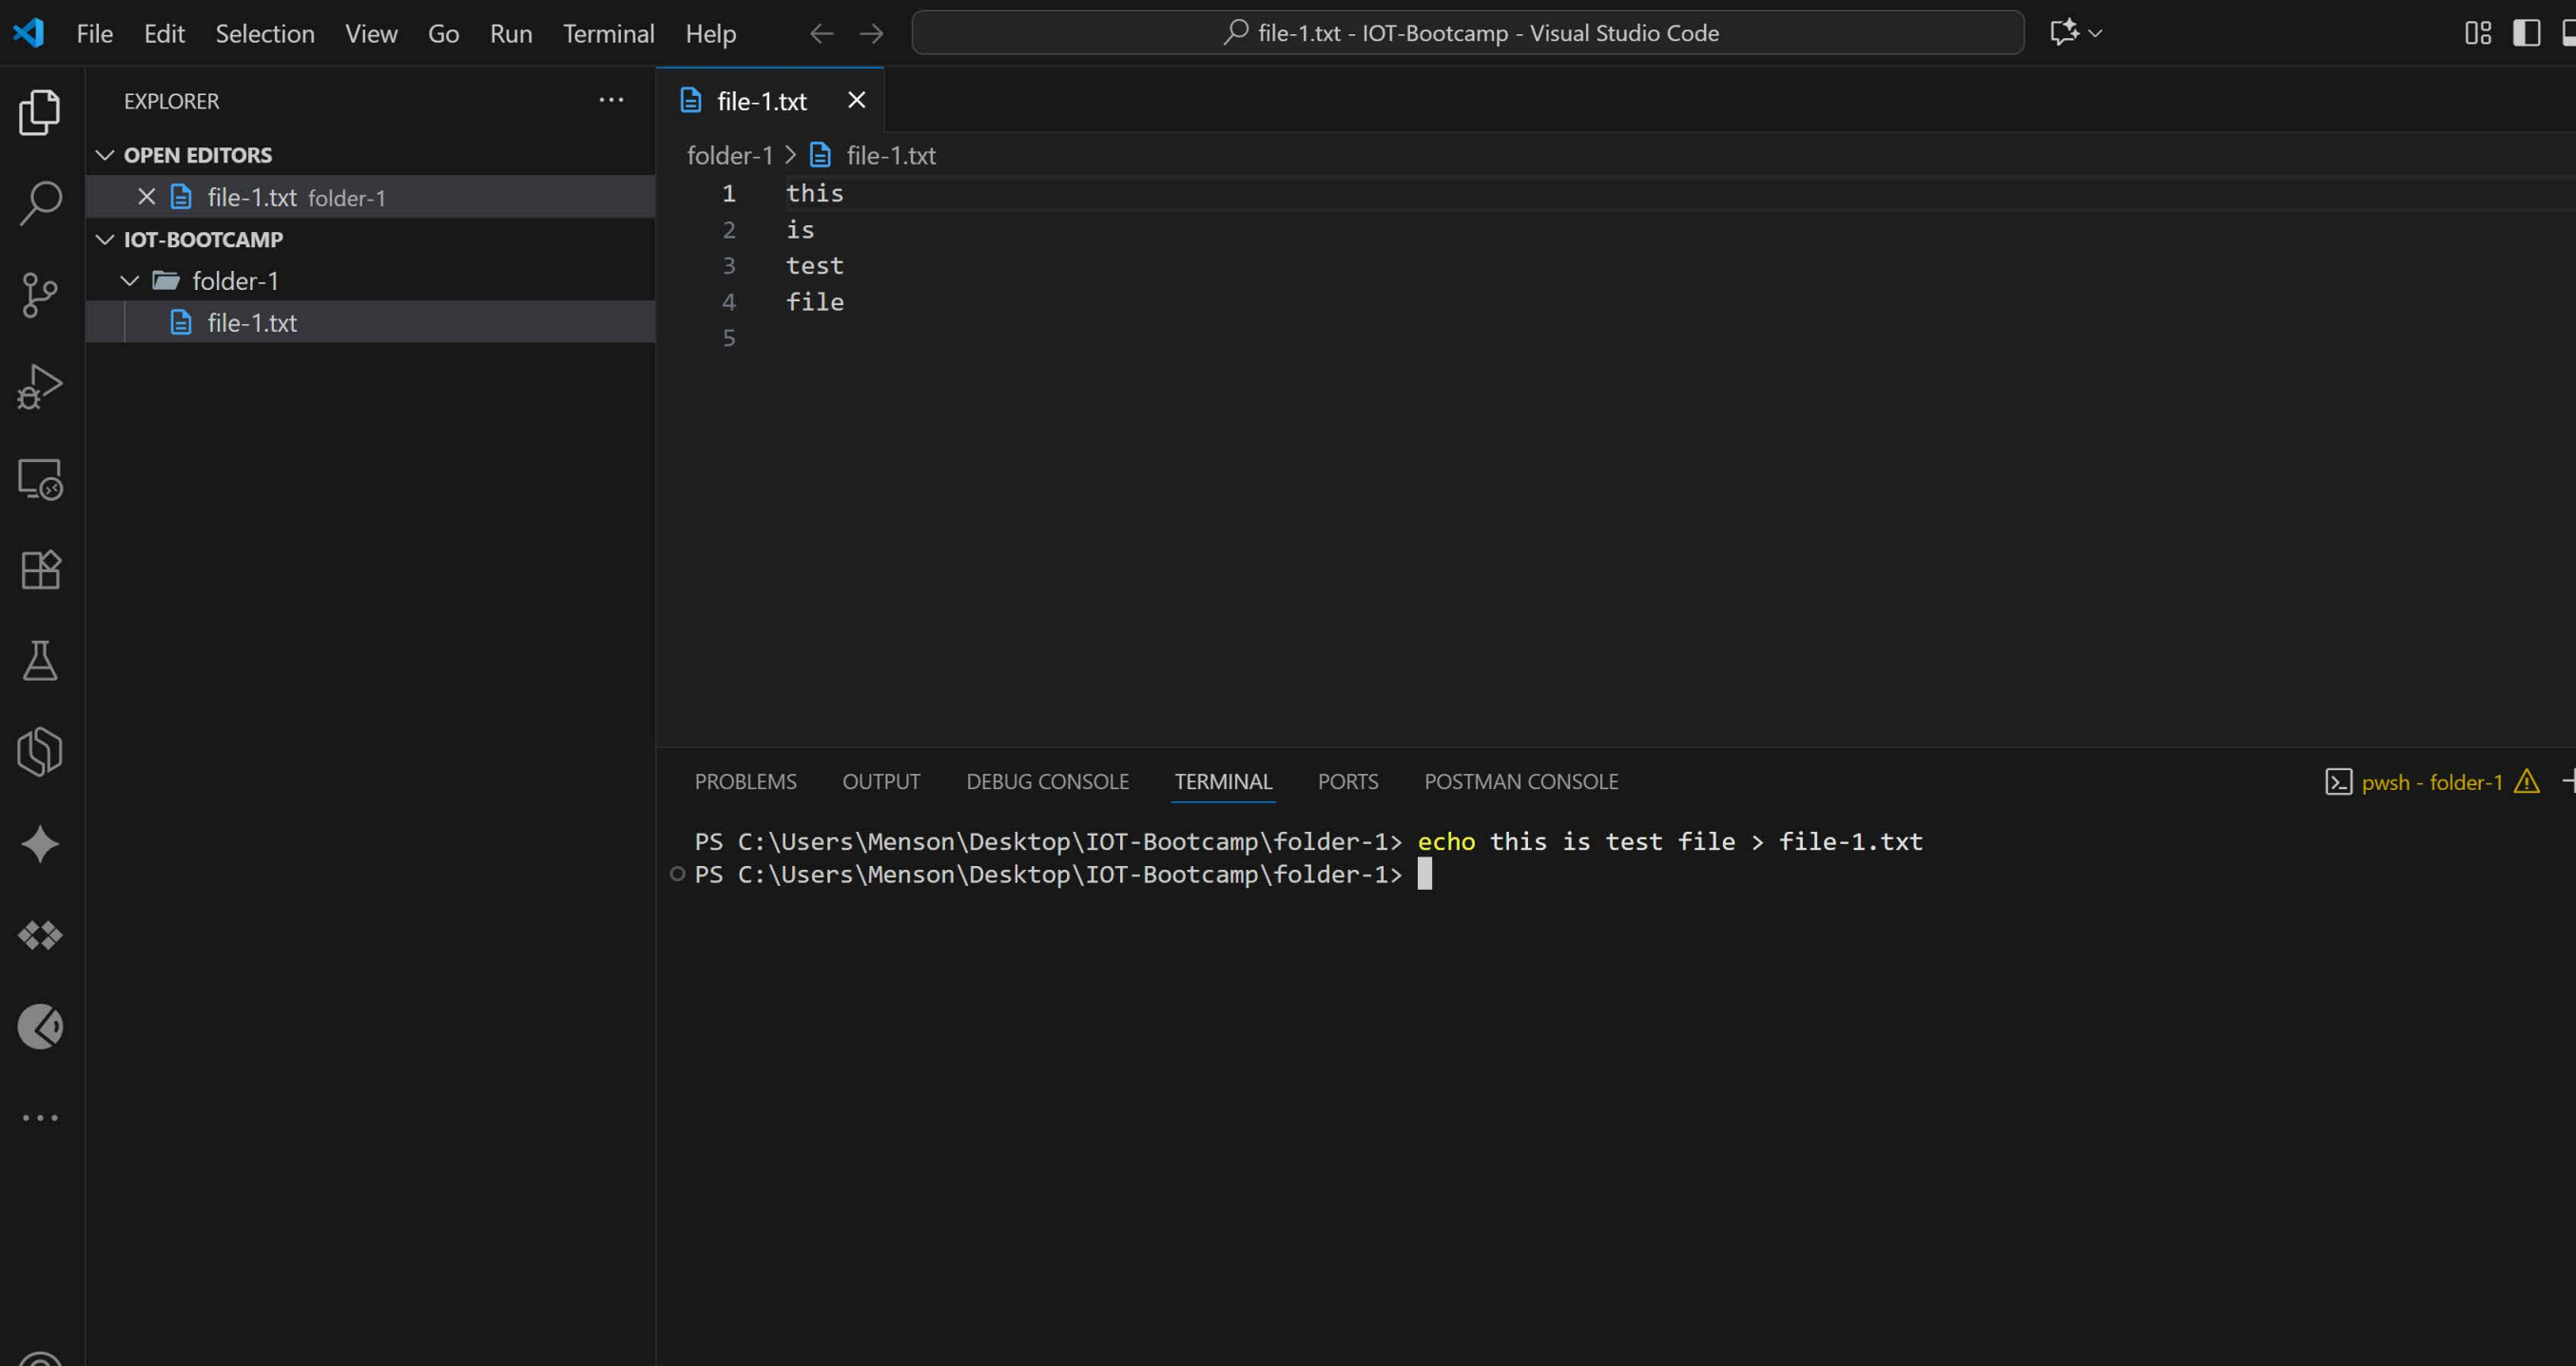

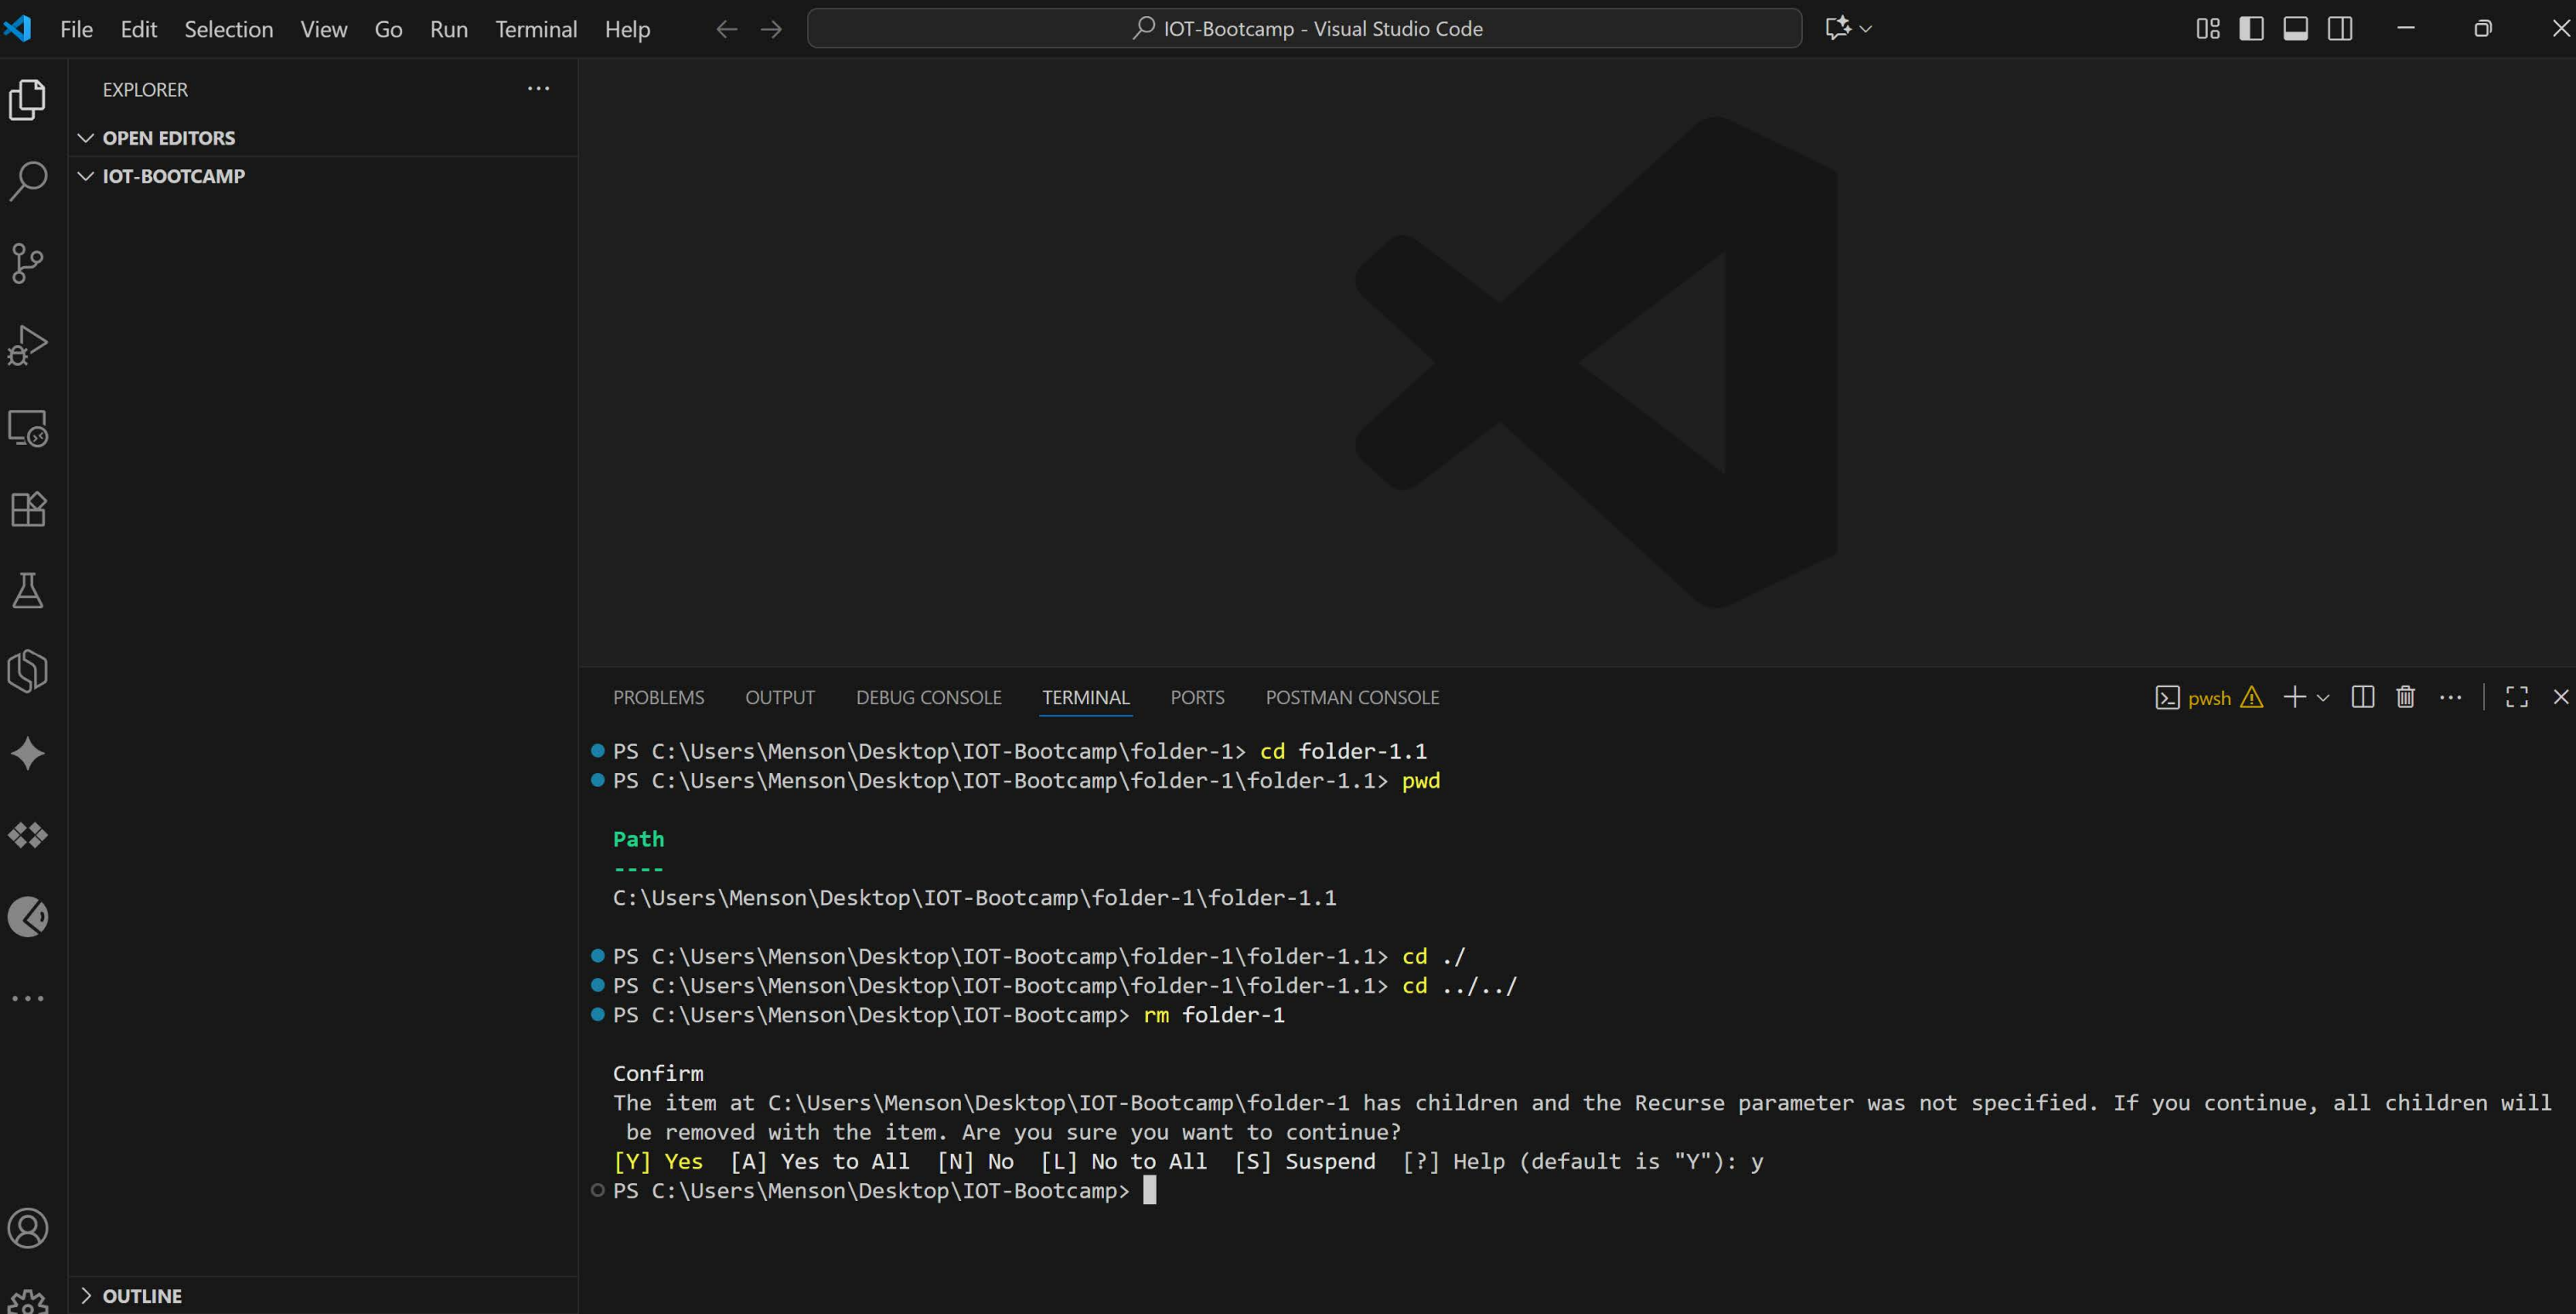

EXPLORER

OPEN EDITORS

IOT-BOOTCAMP

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cd folder-1.1
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1\folder-1.1> pwd
```

Path

C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1\folder-1.1

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1\folder-1.1> cd ../
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1\folder-1.1> cd ../../
PS C:\Users\Menson\Desktop\IOT-Bootcamp> rm folder-1
```


Confirm

The item at C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1 has children and the Recurse parameter was not specified. If you continue, all children will be removed with the item. Are you sure you want to continue?

[Y] Yes [A] Yes to All [N] No [L] No to All [S] Suspend [?] Help (default is "Y"): y

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp>
```

OUTLINE

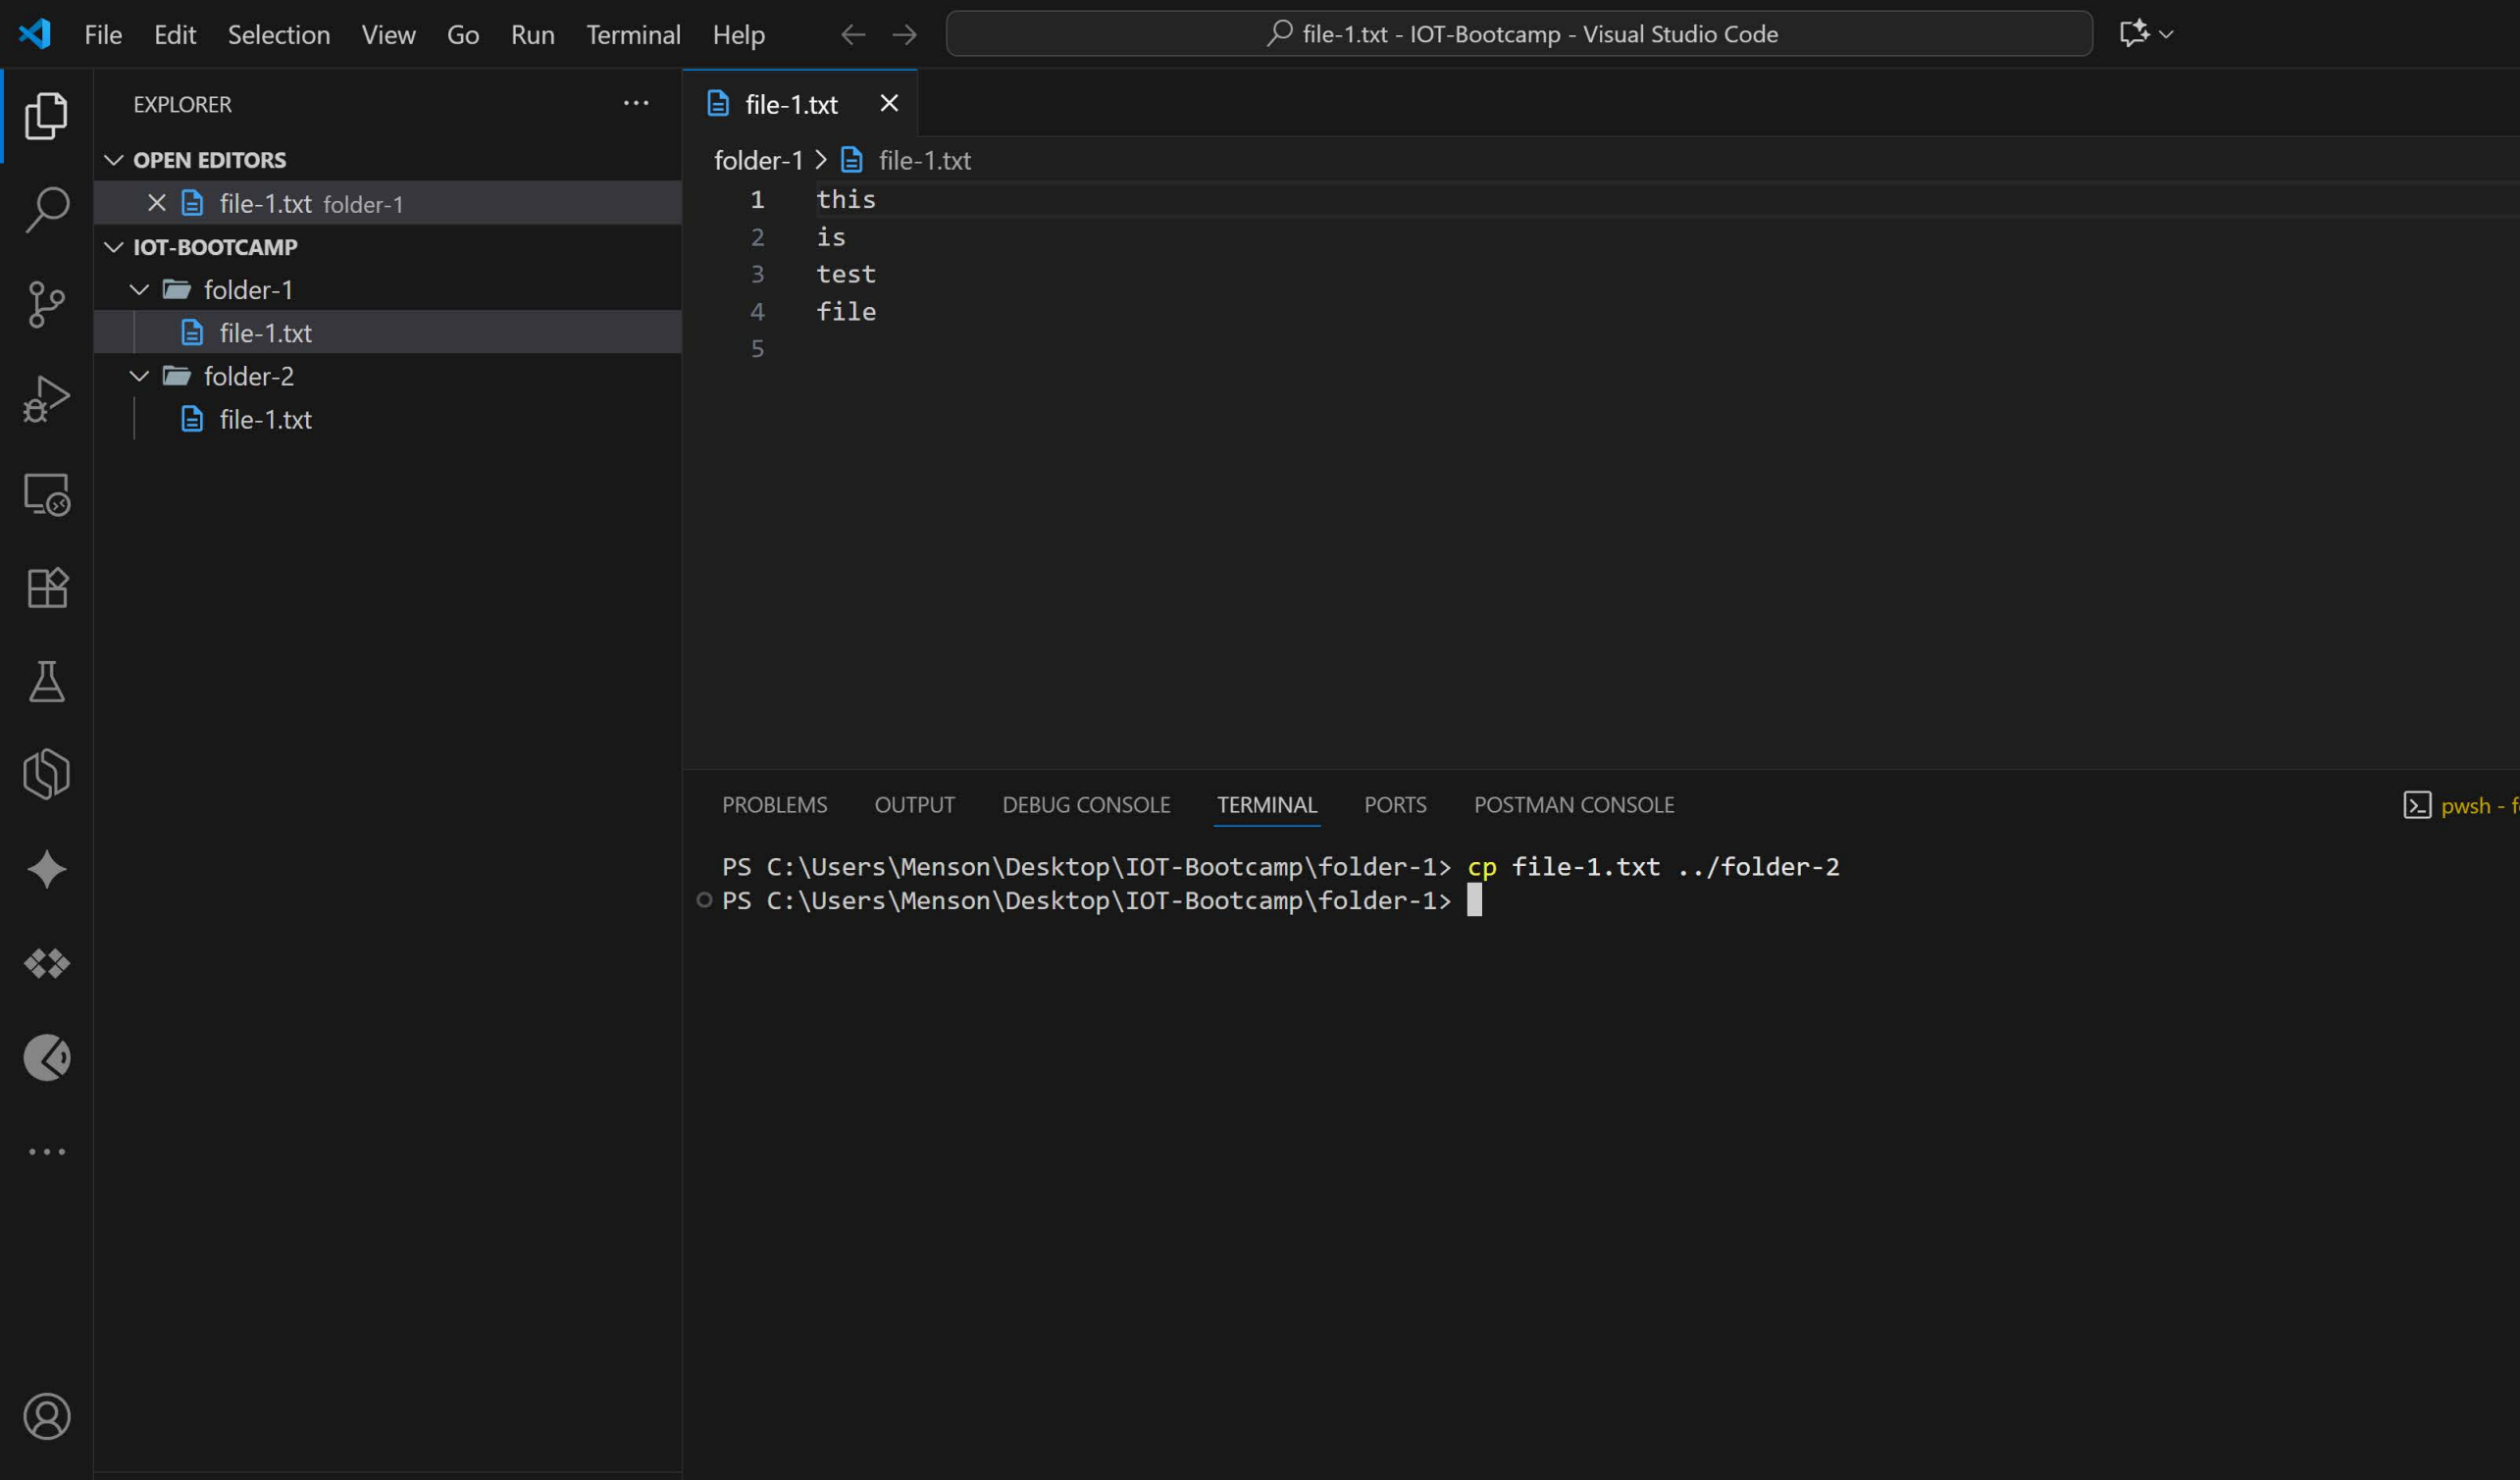

EXPLORER

OPEN EDITORS

✕ file-1.txt folder-1

IOT-BOOTCAMP

folder-1

file-1.txt

folder-2

file-1.txt

file-1.txt ✕

folder-1 > file-1.txt

```
1 this
2 is
3 test
4 file
5
```

PROBLEMS

OUTPUT

DEBUG CONSOLE


TERMINAL

PORTS

POSTMAN CONSOLE

pwsh - f

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cp file-1.txt ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1>
```

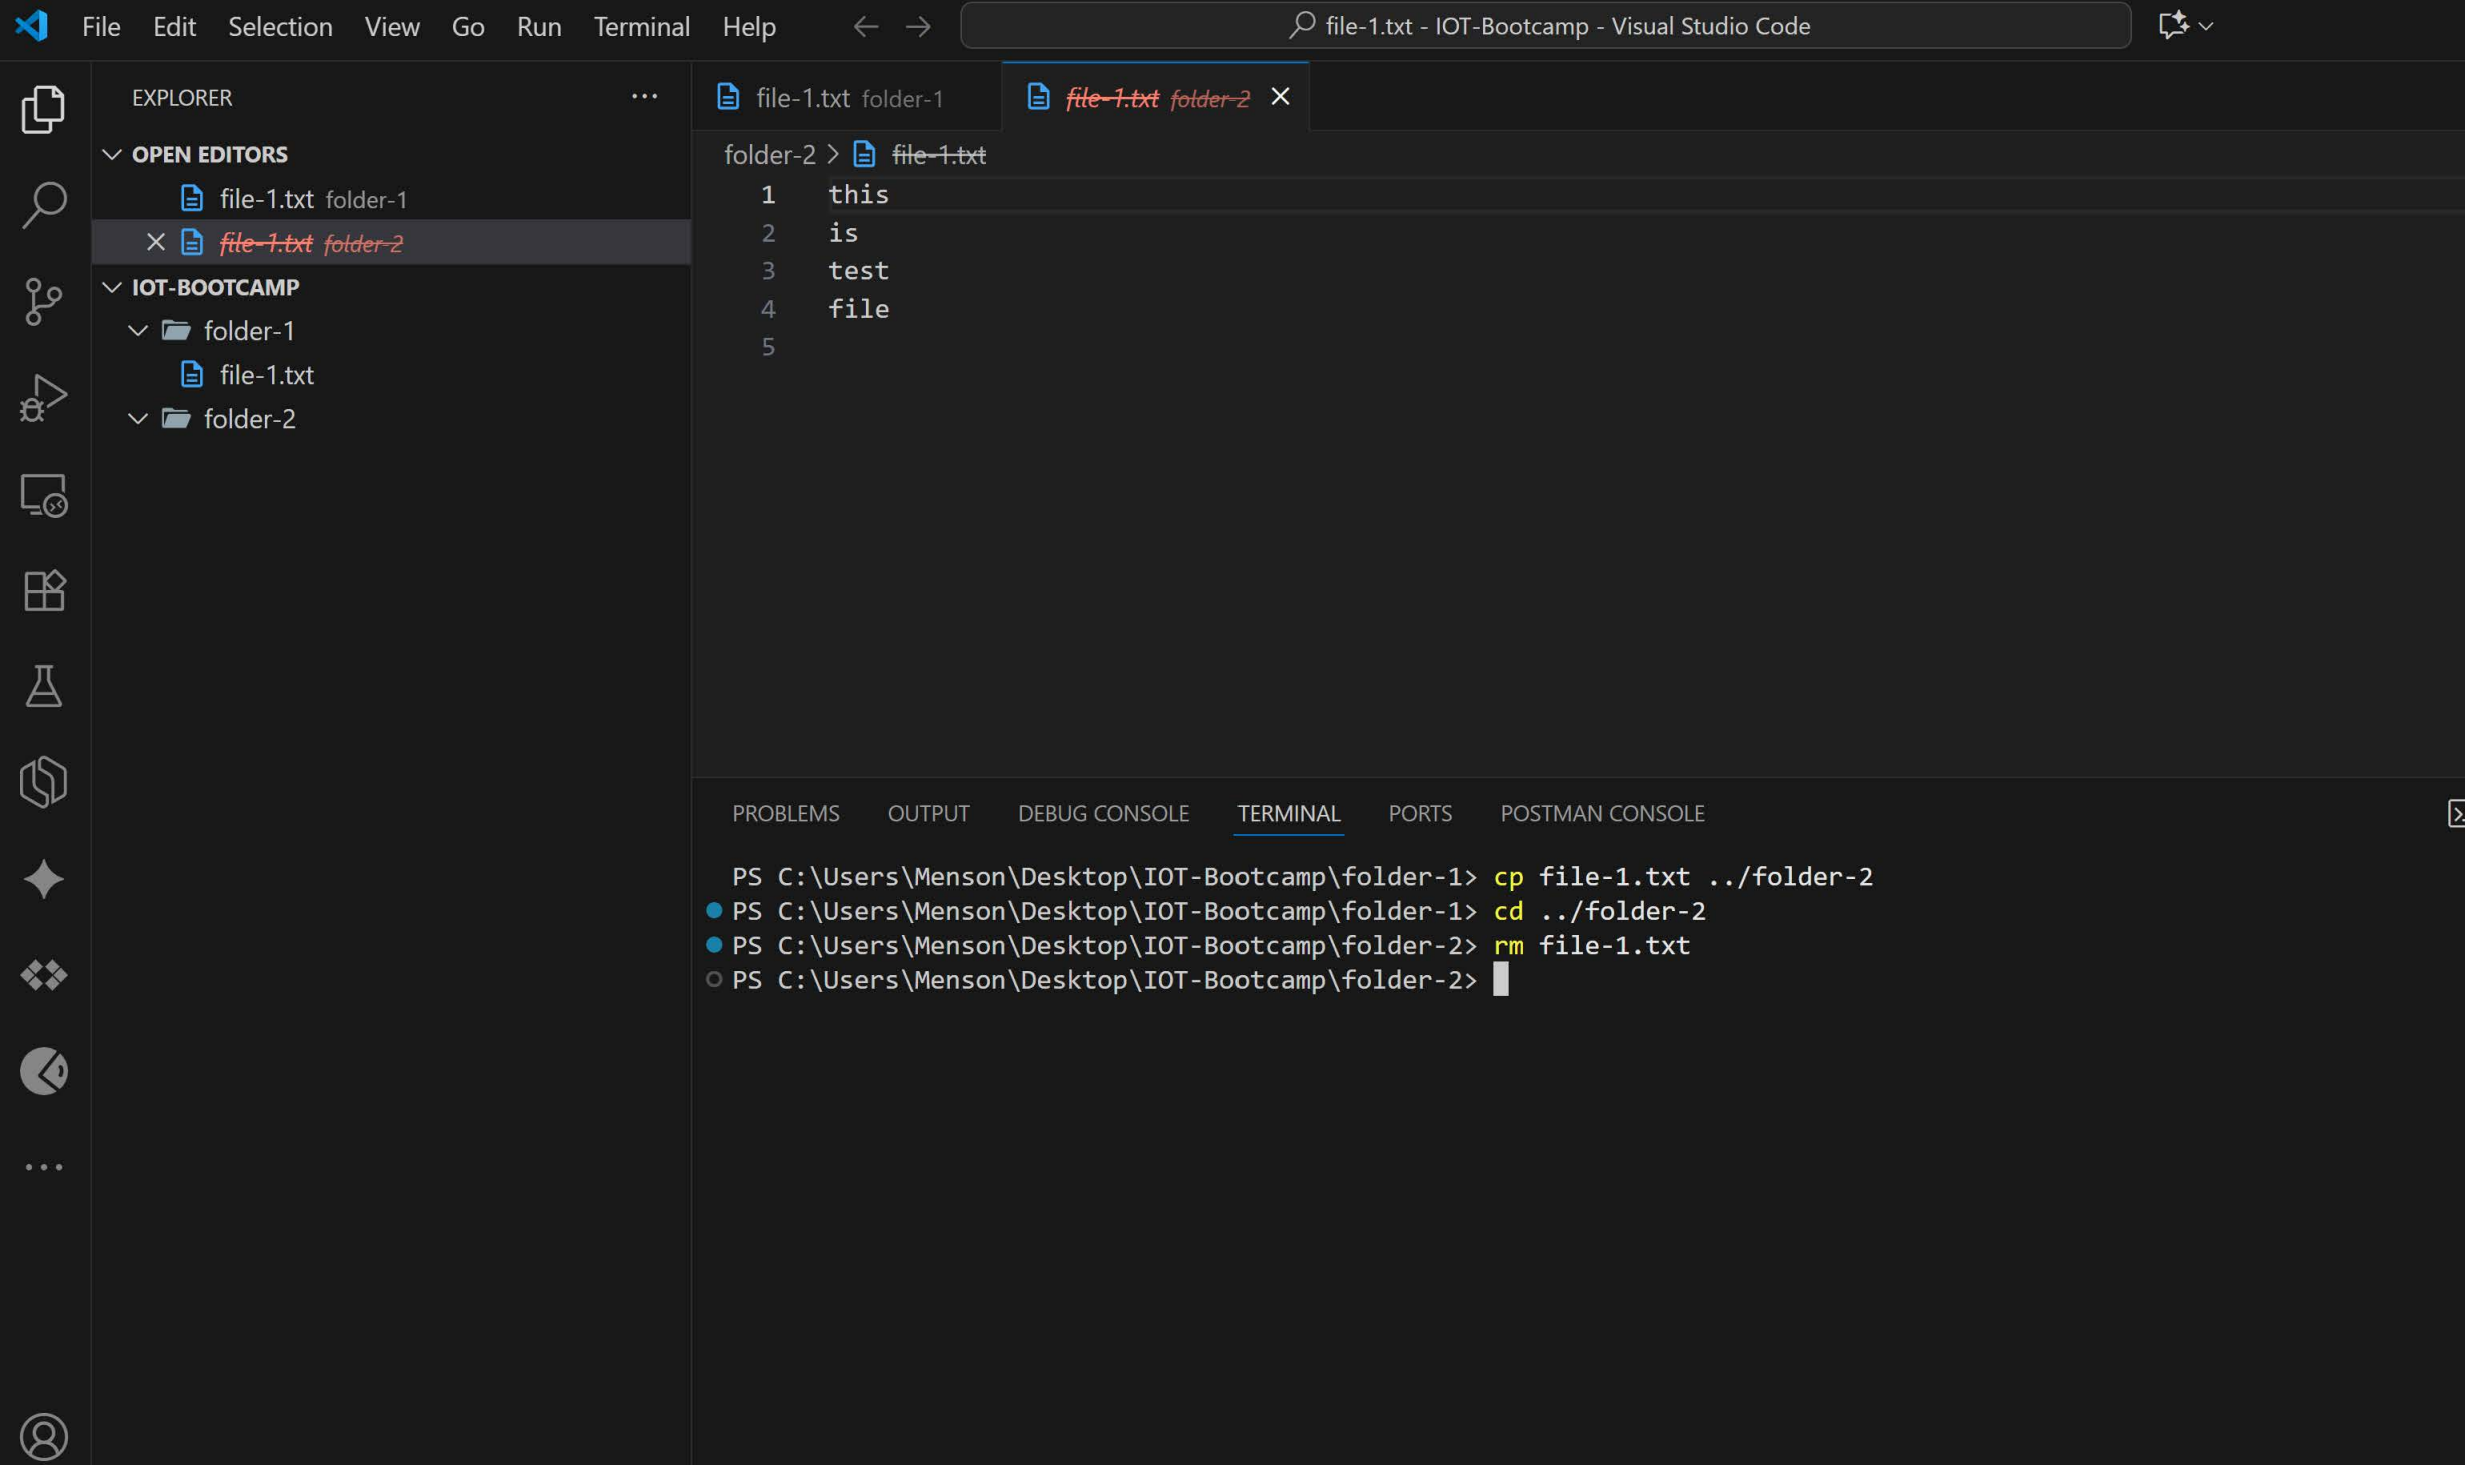

EXPLORER



OPEN EDITORS

file-1.txt folder-1

✕ file-1.txt folder-2

IOT-BOOTCAMP

folder-1

file-1.txt

folder-2

file-1.txt folder-1

file-1.txt folder-2 ✕

folder-2 > file-1.txt

```
1 this
2 is
3 test
4 file
5
```

PROBLEMS

OUTPUT


DEBUG CONSOLE


TERMINAL

PORTS

POSTMAN CONSOLE

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cp file-1.txt ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cd ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2> rm file-1.txt
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2>
```

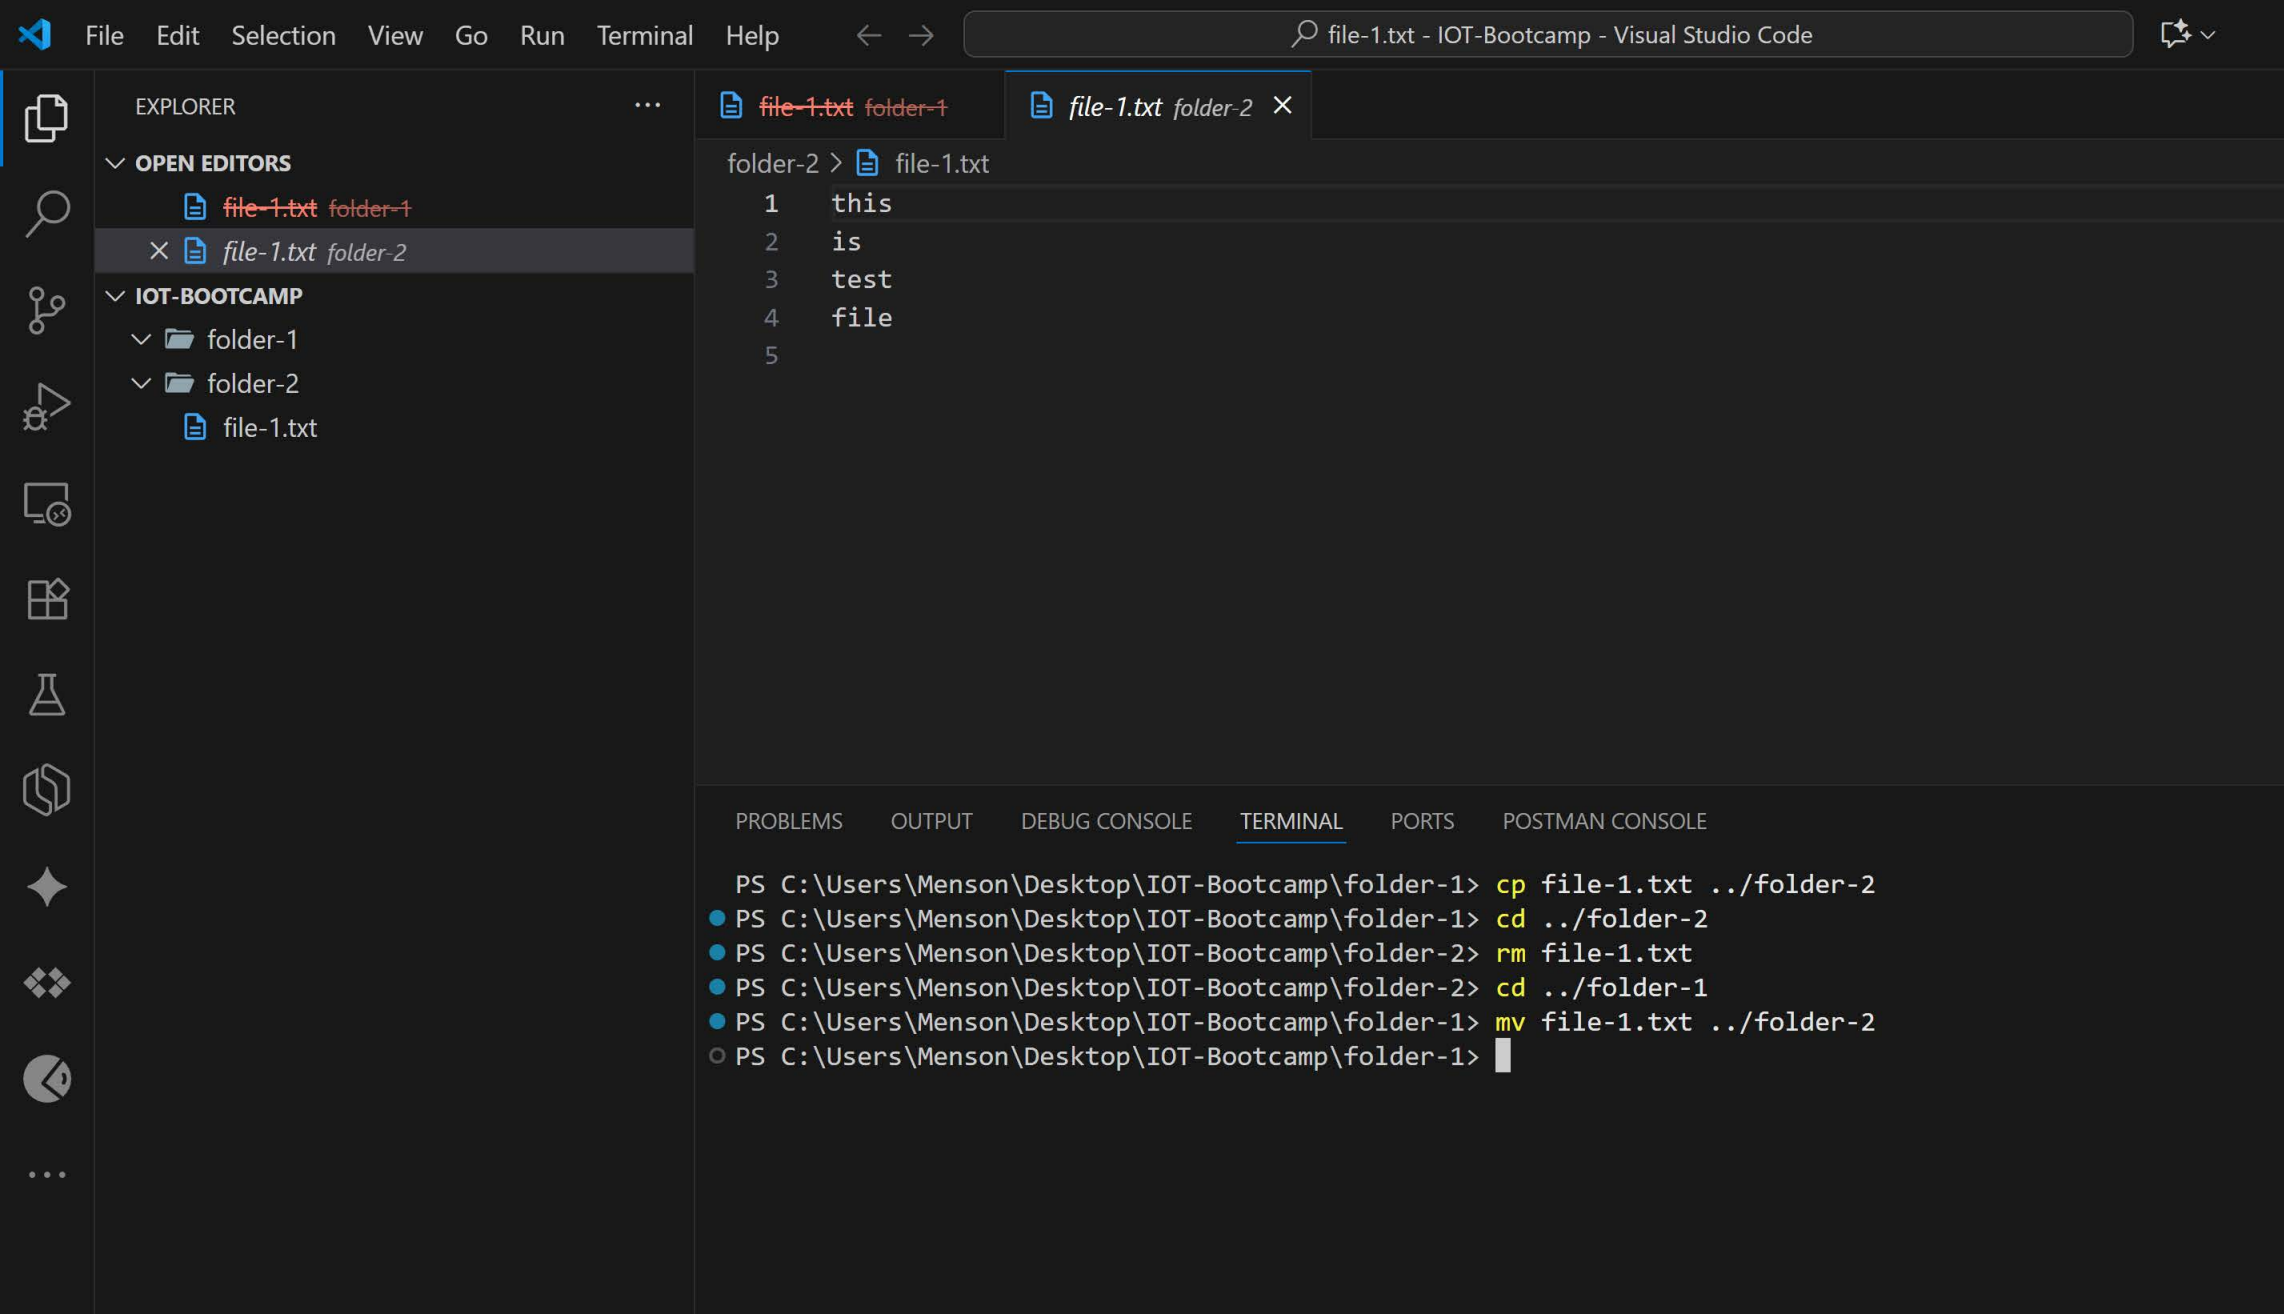

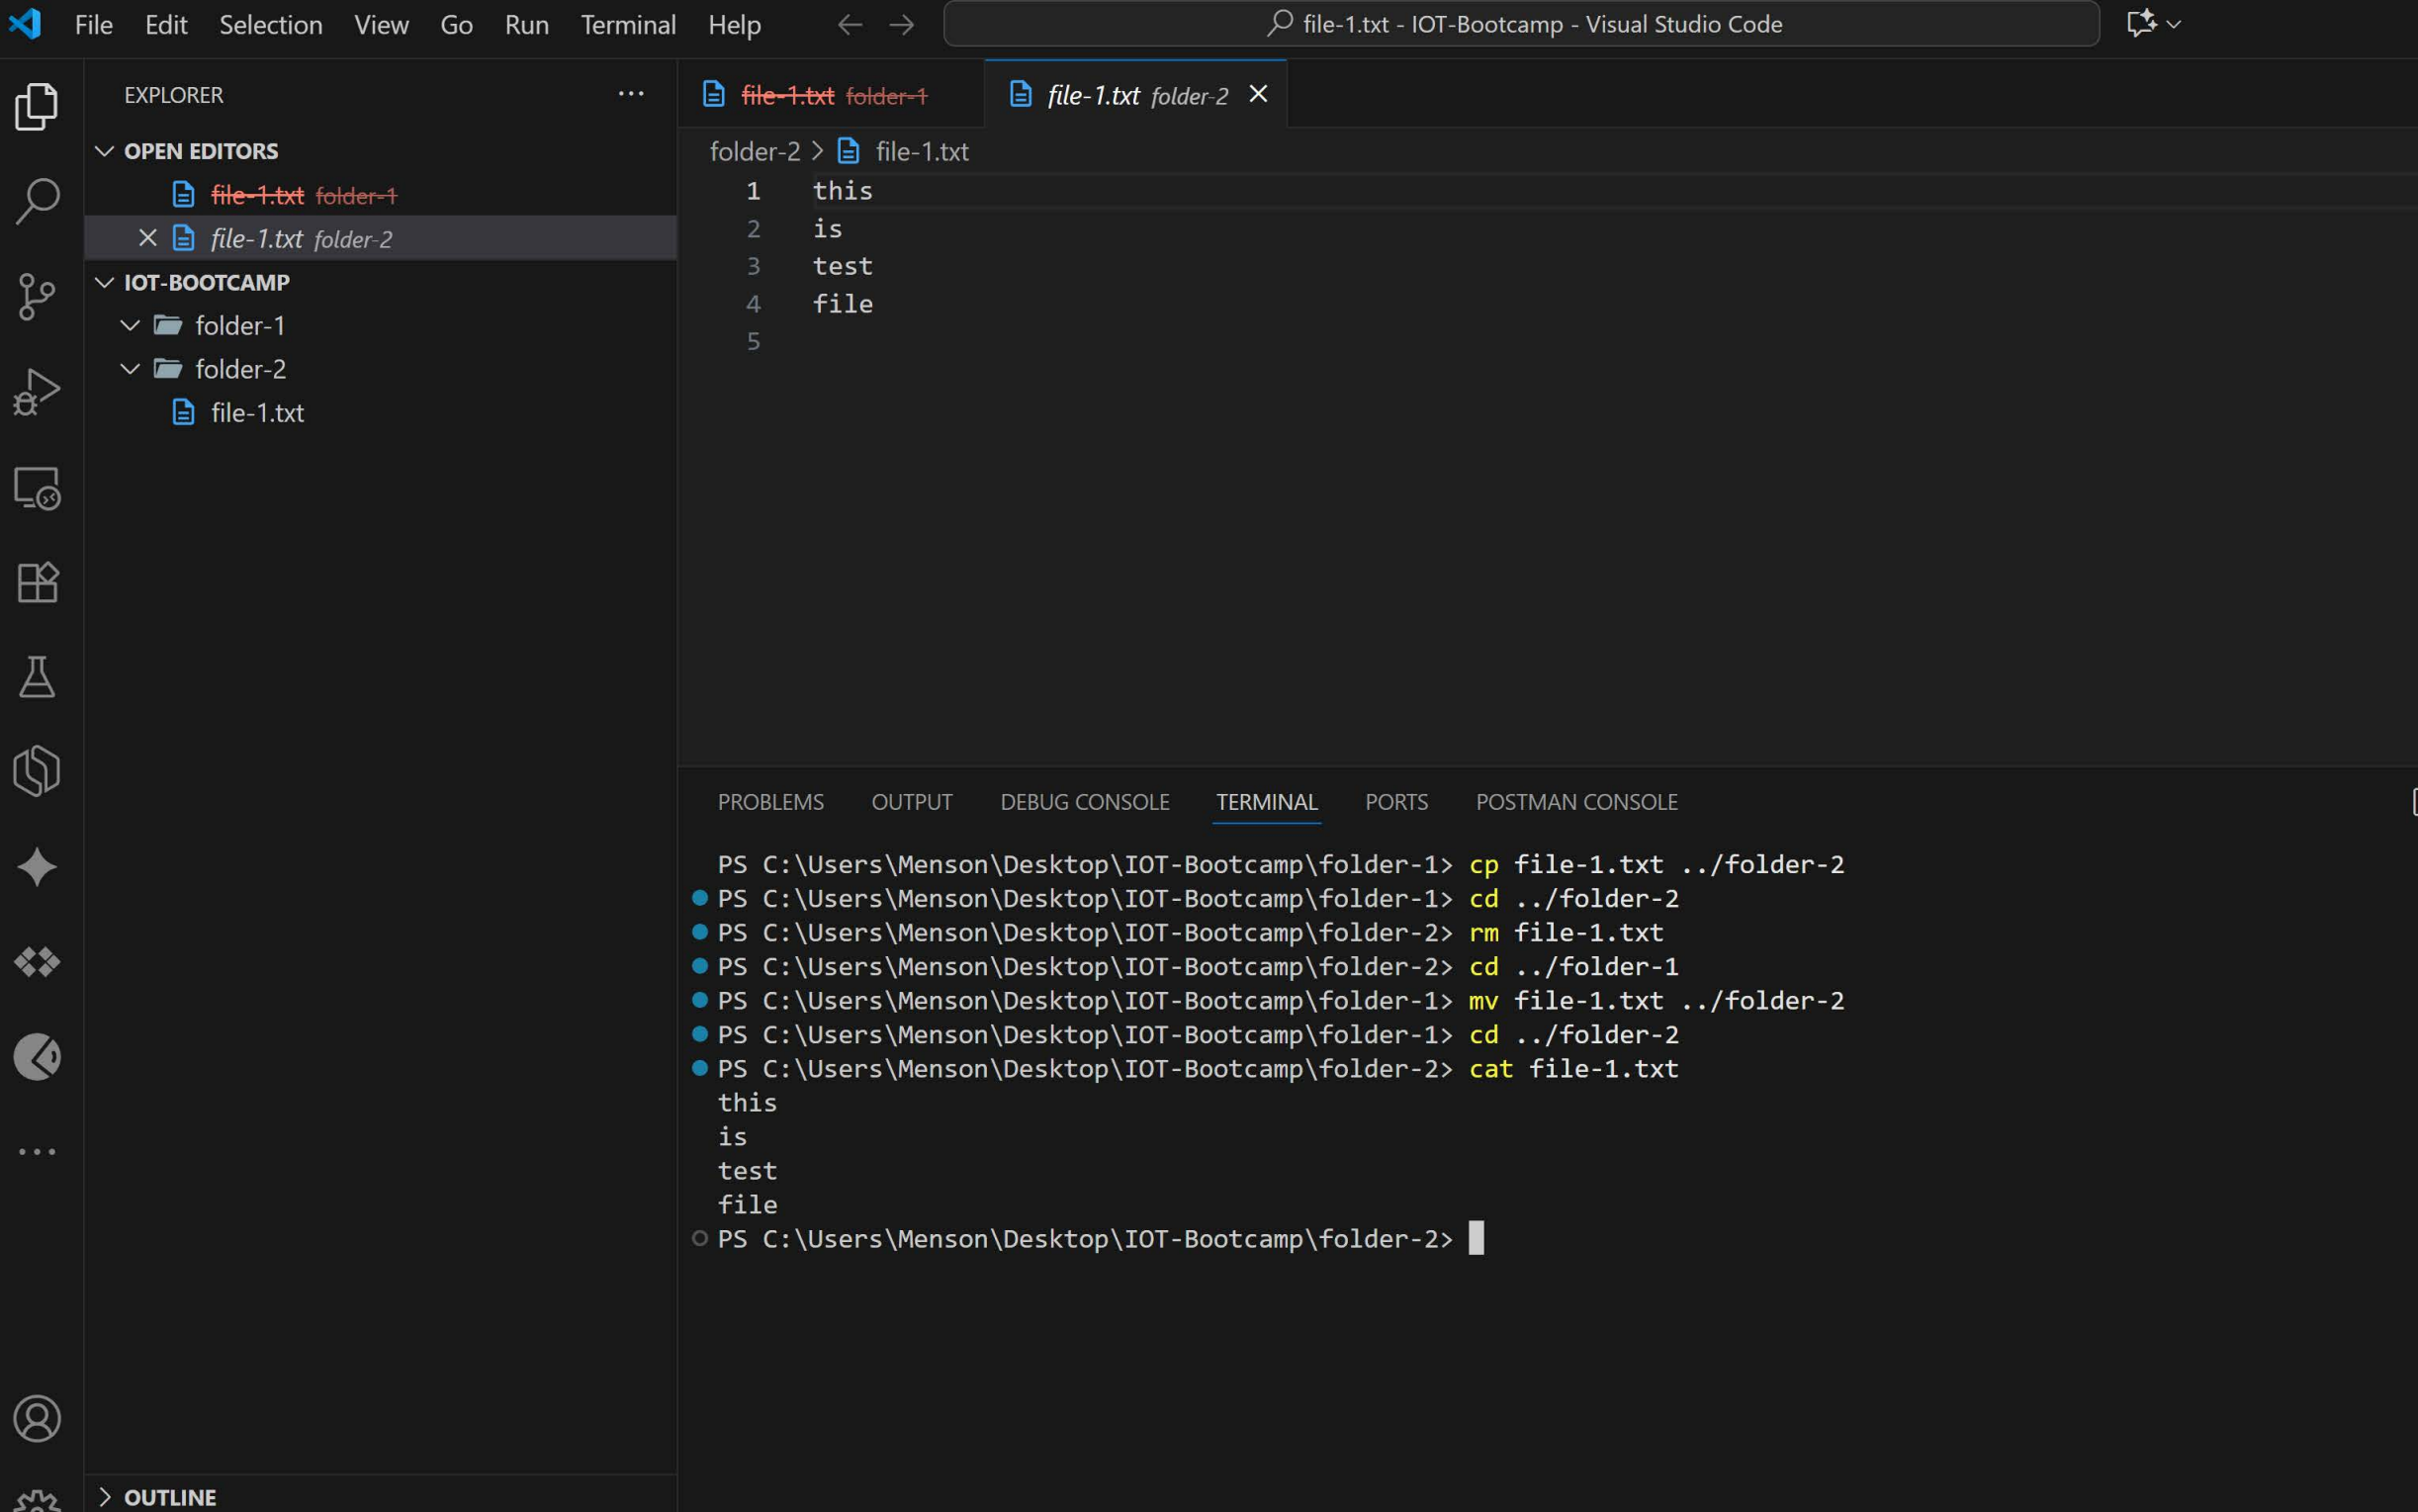

EXPLORER

OPEN EDITORS

file-1.txt folder-1

file-1.txt folder-2

IOT-BOOTCAMP

folder-1

folder-2

file-1.txt

file-1.txt folder-1

file-1.txt folder-2

folder-2 > file-1.txt

```
1 this
2 is
3 test
4 file
5
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

POSTMAN CONSOLE

```
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cp file-1.txt ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cd ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2> rm file-1.txt
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2> cd ../folder-1
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> mv file-1.txt ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-1> cd ../folder-2
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2> cat file-1.txt
this
is
test
file
PS C:\Users\Menson\Desktop\IOT-Bootcamp\folder-2>
```

OUTLINE