

# Course 5

## Finite Automata/Finite State Machines



---

The structure and the content of the lecture is based on <http://www.eecs.wsu.edu/~ananth/CptS317/Lectures/index.htm>



# Excursion: Previous lecture

---

But, DFAs and NFAs are equivalent in their power to capture languages !!



# DFA vs. NFA

## ■ DFA

1. All transitions are deterministic
  - Each transition leads to exactly one state
2. For each state, transition on all possible symbols (alphabet) should be defined
3. Accepts input if the last state visited is in F
4. Sometimes harder to construct because of the number of states
5. Practical implementation is feasible

## ■ NFA

1. Some transitions could be non-deterministic
  - A transition could lead to a subset of states
2. Not all symbol transitions need to be defined explicitly (if undefined will go to an error state – this is just a design convenience, not to be confused with “non-determinism”)
3. Accepts input if *one of* the last states is in F
4. Generally easier than a DFA to construct
5. Practical implementations limited but emerging (e.g., Micron automata processor)

# Finite Automata/Finite State Machines (cont'd)



---



# Finite Automaton (FA)

---

- Informally, a state diagram that comprehensively captures all possible states and transitions that a machine can take while responding to a stream or sequence of input symbols
- Recognizer for “Regular Languages”
- Deterministic Finite Automata (DFA)
  - The machine can exist in only one state at any given time
- Non-deterministic Finite Automata (NFA)
  - The machine can exist in multiple states at the same time



# Finite Automaton (FA)

---

Construct DFA and NFA for recognizing the language:

$$L(FA) = \{awa \mid w \in \{b, c\}^*\}$$

Solution: see whiteboard.

***In many cases it is easier to construct the NFA for a language.***

Theorem:

A language L is accepted by a DFA if and only if it is accepted by an NFA.

Proof. later

# Examples of NFA for different types of languages

1.  $L(FA) = \{ab^n \mid n \geq 0\} \cup \{ab^n ab^m \mid n, m \geq 0\}$  (**Union of languages**)
2.  $L(FA) = \{IF, FOR, FORK\}$  (**Generation of finite language**)
3.  $L(FA) = \{a^n \mid n \geq 1\}$ ,  $L(AF) = \{a^n \mid n \geq 0\}$  (**Repetition of symbols**)
4.  $L(FA) = \{w \mid w \in \{a, b, c\}^*\}$ ,  $L(AF) = \{w \mid w \in \{a, b, c\}^+\}$  (**Mix of letters**)
5.  $L(FA) = \{w \mid w \in \{0, \dots, 9\}^*, w \text{ ends with } 0\}$
6.  $L(FA) = \{a^n b^m c^k \mid m, n, k \geq 1\}$
7.  $L(FA) = \{w \mid w \in \{0, 1\}^*, w \text{ contains at most one } 1\}$
8.  $L(FA) = \{w \mid w \text{ contains an even number of zeros and any number of } 1\}$
9.  $L(FA) = \{wabaw \mid w \in \{a, b, c\}^*\}$
10.  $L(FA) = \{w \mid w \text{ contains an even number of } 0\text{'s and } 1\text{'s}\}$
11.  $L(FA) = \{a^i b^j \mid i, j > 0\}$
12.  $L(FA) = \{w \in \{a, b, c\}^* \mid w \text{ contains } abba\}$
13.  $L(FA) = \{w \text{ integer constant in } C \text{ with optional sign}\}$
14.  $L(FA) = \{w \text{ is divisible by } 3\}$
15.  $L(FA) = \{w \mid w \equiv 1 \pmod{3}\}$

**Solution:** see whiteboard.



# Equivalence of DFA & NFA

- Theorem:

Should be  
true for  
any L

- → A language L is accepted by a DFA if and only if it is accepted by an NFA i.e.  $L(DFA) = L(NFA)$ .

- Proof:

1. **If part i.e**  $L(DFA) \supseteq L(NFA)$  :
  - Prove by showing every NFA can be converted to an equivalent DFA (in the next few slides...)
2. **Only-if part i.e**  $L(DFA) \subseteq L(NFA)$  is trivial:
  - Every DFA is a special case of an NFA where each state has exactly one transition for every input symbol. Therefore, if L is accepted by a DFA, it is accepted by a corresponding NFA.





# Proof for the if-part

---

- If-part: Show that  $L(DFA) \supseteq L(NFA)$
- *rephrasing...*
- Given any NFA  $N$ , we can construct a DFA  $D$  such that  $L(N)=L(D)$
- How to convert an NFA into a DFA?

---

  - Observation: In an NFA, each transition maps to a **subset** of states
  - Idea: Represent:  
each “subset of NFA\_states”  $\rightarrow$  a single “DFA\_state”

**Subset construction**



## NFA to DFA by subset construction

---


- Let  $N = \{Q_N, \Sigma, \delta_N, q_0, F_N\}$
- Goal: Build  $D = \{Q_D, \Sigma, \delta_D, \{q_0\}, F_D\}$  s.t.  
 $L(D) = L(N)$
- Construction:
  1.  $Q_D$  = all subsets of  $Q_N$  (i.e., power set)
  2.  $F_D$  = set of subsets  $S$  of  $Q_N$  s.t.  $S \cap F_N \neq \emptyset$
  3.  $\delta_D$ : for each subset  $S$  of  $Q_N$  and for each input symbol  $a$  in  $\Sigma$ :
    - $\delta_D(S, a) = \bigcup_{p \in S} \delta_N(p, a)$

Idea: To avoid enumerating all of power set, do “lazy creation of states”

# NFA to DFA construction: Example 1


- $L = \{w \mid w \text{ ends in } 01\}$

**NFA:**

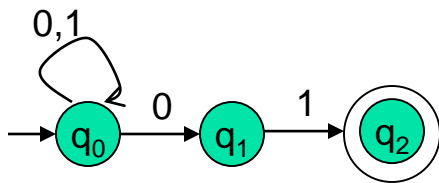

$\delta_N$	0	1
$\rightarrow q_0$	$\{q_0, q_1\}$	$\{q_0\}$
$q_1$	$\emptyset$	$\{q_2\}$
$*q_2$	$\emptyset$	$\emptyset$

**DFA:**

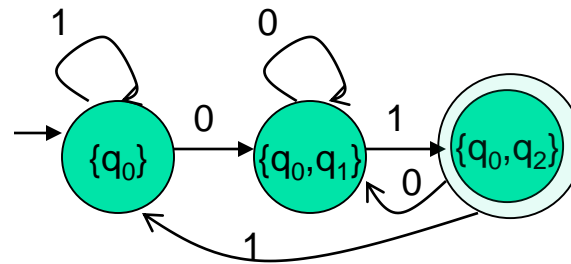

$\delta_D$	0	1
$\emptyset$	$\emptyset$	$\emptyset$
$\rightarrow \{q_0\}$	$\{q_0\} \cup \{q_1\}$	$\{q_0\}$
$\{q_1\}$	$\emptyset$	$\{q_2\}$
$*\{q_2\}$	$\emptyset$	$\emptyset$
$\{q_0, q_1\}$	$\{q_0, q_1\} \cup \emptyset$	$\{q_0\} \cup \{q_2\}$
$*\{q_0, q_2\}$	$\{q_0, q_1\}$	$\{q_0\}$
$*\{q_1, q_2\}$	$\emptyset$	$\{q_2\}$
$*\{q_0, q_1, q_2\}$	$\{q_0\} \cup \{q_1\} \cup \emptyset \cup \emptyset$	$\{q_0\} \cup \{q_2\} \cup \emptyset$



$\delta_D$	0	1
$\rightarrow \{q_0\}$	$\{q_0, q_1\}$	$\{q_0\}$
$\{q_0, q_1\}$	$\{q_0, q_1\}$	$\{q_0, q_2\}$
$*\{q_0, q_2\}$	$\{q_0, q_1\}$	$\{q_0\}$

0. Enumerate all possible subsets
1. Determine transitions
2. Retain only those states reachable from  $\{q_0\}$



## NFA to DFA construction: Example 2

---

- Construct the NFA recognizing the following language, then transform it into an DFA:


$L = \{x \in \{0,1\}^* \mid \text{the second symbol from the right is } 1\},$

**Solution:** see whiteboard.

# NFA to DFA: Repeating the example using *LAZY CREATION*


- $L = \{w \mid w \text{ ends in } 01\}$

**NFA:**

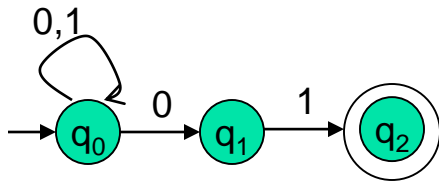

$\delta_N$	0	1
$\rightarrow q_0$	$\{q_0, q_1\}$	$\{q_0\}$
$q_1$	$\emptyset$	$\{q_2\}$
$*q_2$	$\emptyset$	$\emptyset$

**DFA:**

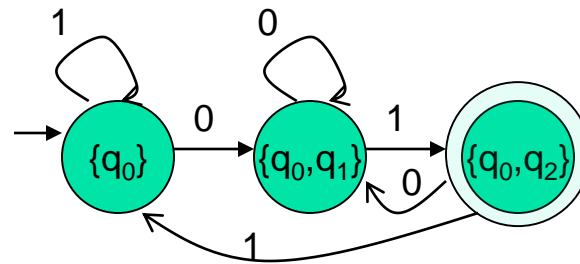

$\delta_D$	0	1
$\{q_0\}$	$\{q_0, q_1\}$	$\{q_0\}$
$\{q_0, q_1\}$	$\{q_0, q_1\}$	$\{q_0, q_2\}$
$*\{q_0, q_2\}$	$\{q_0, q_1\}$	$\{q_0\}$

Main Idea:

Introduce states as you go (on a need basis)




# Correctness of subset construction

---

*Theorem:* *If  $D$  is the DFA constructed from NFA  $N$  by subset construction, then  $L(D)=L(N)$*

■ Proof:

- Show that  $\hat{\delta}_D(\{q_0\}, w) \equiv \hat{\delta}_N(q_0, w)$  , for all  $w$
- Using induction on  $w$ 's length:
  - Let  $w = xa$
  - $\hat{\delta}_D(\{q_0\}, xa) \equiv \hat{\delta}_D(\hat{\delta}_N(q_0, x), a) \equiv \hat{\delta}_N(q_0, w)$




# A bad case where $\#states(DFA) \gg \#states(NFA)$

---

- Typically (not always)  $\#states(DFA) = \#states(NFA)$ , however a DFA has more transitions.
- Worst case:  $\#states(DFA) = 2^n$ ,  $\#states(NFA) = n$
- However,  $L = \{w \mid w \text{ is a binary string s.t., the } k^{\text{th}} \text{ symbol from its end is a } 1\}$ 
  - NFA has  $k+1$  states
  - But an equivalent DFA needs to have at least  $2^k$  states
  - (see next slide)

# Automata recogn. the lang. of binary strings s.t., the $k^{\text{th}}$ symbol from its end is a 1

$L = \{ w \mid w \text{ is a binary string s.t. the } k^{\text{th}} \text{ symbol from the end is } 1 \}$



There is a state  $q_0$  that the NFA is always in regardless of what it was read; if the next input is 1 then the NFA might "guess" that this 1 is the  $k^{\text{th}}$  symbol from the end (non-deterministic  $q_0, q_1$ ). Any input from  $q_i$  ( $i \geq 1$ ) has effect on moving on the states.

Example: Instantiate  $k$  with 1, 2, ... and check how the NFA works.

DFA:


$\delta$	0	1
$\phi$	$\phi$	$\phi$
$\{q_0\}$	$\{q_0\}$	$\{q_0, q_1\}$
$\{q_1\}$	$\{q_2\}$	$\{q_2\}$
...		
$\{q_k\}$	$\phi$	$\phi$
$\{q_0, q_1\}$	$\{q_0, q_2\}$	$\{q_0, q_1, q_2\}$
$\{q_0, q_2\}$	$\{q_0, q_3\}$	$\{q_0, q_2, q_3\}$
...		

$2^{k+1}$  states

Question: Can I get rid of any states?  
No!!! All states are reachable from each other!

Answer:  $2^{k+1}$  states for the DFA






# Relationship between regular lang. and type 3 lang.

---

- **Definition.** A type 3 grammar has a normal form if it has generating rules as follows:  $A \rightarrow iB$ ,  $C \rightarrow j$ , where  $A, B, C \in V_N$ ;  $i, j \in V_T$ , or the completing rule  $S \rightarrow \lambda$  and in this case  $S$  does not appear on the right side of any rule.
- (Parsers for right linear grammars are much simpler. Why?)



# Relationship between regular lang. and type 3 lang. (cont'd)

- **Lemma.** Any type 3 grammar admits a normal form.
- **Proof sketch.** Production rules of type  $A \rightarrow pB$ ,  $p = i_1 \dots i_n$ , are replaced by  $A \rightarrow i_1 Z_1, Z_1 \rightarrow i_2 Z_2, \dots, Z_{n-1} \rightarrow i_n B$ ,  $Z_i$  are newly introduced non-terminals.
- For a rule  $A \rightarrow p$  with  $|p| > 1$  we do the same except the last rule which will be  $Z_k \rightarrow i_n$ .
- Transform  $A \rightarrow Bp$  rules (how to convert a left-linear grammar to a right-linear one)

Excursion: convert a left-linear  
grammar to a right-linear one



---



# Left linear grammar

---

- A *left linear grammar* is a linear grammar in which the non-terminal symbol always occurs on the left side.
- Here is a left linear grammar:

$$S \rightarrow Aa$$
$$A \rightarrow ab$$



# Right linear grammar

---

- A *right linear grammar* is a linear grammar in which the non-terminal symbol always occurs on the right side.
- Here is a right linear grammar:

$$\begin{array}{l} S \rightarrow abaA \\ A \rightarrow \varepsilon \end{array}$$



# Left linear grammars are evil

---

- Consider this rule from a left linear grammar:  
 $A \rightarrow Babc$
- Can that rule be used to recognize this string:  
abbabc
- We need to check the rule for B:  
 $B \rightarrow Cb \mid D$
- Now we need to check the rules for C and D.
- This is very complicated.
- Left linear grammars require complex parsers.




# Right linear grammars are good

---

- Consider this rule from a right linear grammar:  
 $A \rightarrow abcB$
- Can that rule be used to recognize this string:  
abcbabb
- We immediately see that the first part of the string –  $abc$  – matches the first part of the rule. Thus, the problem simplifies to this: can the rule for  $B$  be used to recognize this string :  
abb
- Parsers for right linear grammars are much simpler.

# Convert left linear to right linear

Now we will see an algorithm for converting any left linear grammar to its equivalent right linear grammar.

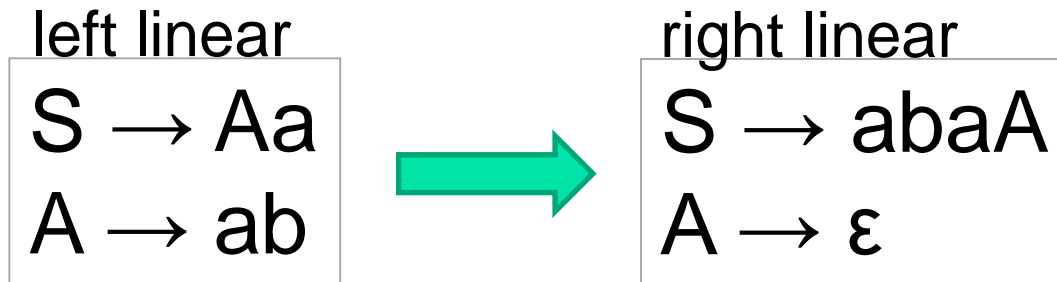

Both grammars generate this language:  $\{aba\}$





# May need to make a new start symbol

---

The algorithm on the following slides assume that the left linear grammar doesn't have any rules with the start symbol on the right hand side.

- If the left linear grammar has a rule with the start symbol  $S$  on the right hand side, simply add this rule:

$$S_0 \rightarrow S$$



# Symbols used by the algorithm

---

- Let  $S$  denote the start symbol
- Let  $A, B$  denote non-terminal symbols
- Let  $p$  denote zero or more terminal symbols
- Let  $\varepsilon$  denote the empty symbol



# Algorithm

---

- 1) If the left linear grammar has a rule  $S \rightarrow p$ , then make that a rule in the right linear grammar
- 2) If the left linear grammar has a rule  $A \rightarrow p$ , then add the following rule to the right linear grammar:  
 $S \rightarrow pA$
- 3) If the left linear grammar has a rule  $B \rightarrow Ap$ , add the following rule to the right linear grammar:  
 $A \rightarrow pB$
- 4) If the left linear grammar has a rule  $S \rightarrow Ap$ , then add the following rule to the right linear grammar:  
 $A \rightarrow p$



# Convert this left linear grammar

---

left linear

$$S \rightarrow Aa$$
$$A \rightarrow ab$$



# Right hand side has terminals

---

left linear

$$S \rightarrow Aa$$
$$A \rightarrow ab$$

right linear

$$S \rightarrow abA$$

2) If the left linear grammar has this rule  $A \rightarrow p$ , then add the following rule to the right linear grammar:  $S \rightarrow pA$

# Right hand side of S has non-terminal

left linear

$$S \rightarrow Aa$$
$$A \rightarrow ab$$

right linear

$$S \rightarrow abA$$
$$A \rightarrow a$$

4) If the left linear grammar has  $S \rightarrow Ap$ , then add the following rule to the right linear grammar:

$$A \rightarrow p$$



# Equivalent!

---

left linear

$$S \rightarrow Aa$$
$$A \rightarrow ab$$

right linear

$$S \rightarrow abA$$
$$A \rightarrow a$$

Both grammars generate this  
language: {aba}

# Convert this left linear grammar

original grammar

$S \rightarrow Ab$

$S \rightarrow Sb$

$A \rightarrow Aa$

$A \rightarrow a$



*make a  
new start  
symbol*

left linear

$S_0 \rightarrow S$

$S \rightarrow Ab$

$S \rightarrow Sb$

$A \rightarrow Aa$

$A \rightarrow a$



Convert this





# Right hand side has terminals

left linear


$$S_0 \rightarrow S$$
$$S \rightarrow Ab$$
$$S \rightarrow Sb$$
$$A \rightarrow Aa$$
$$A \rightarrow a$$

right linear

$$S_0 \rightarrow aA$$

2) If the left linear grammar has this rule  $A \rightarrow p$ , then add the following rule to the right linear grammar:  $S \rightarrow pA$

# Right hand side has non-terminal

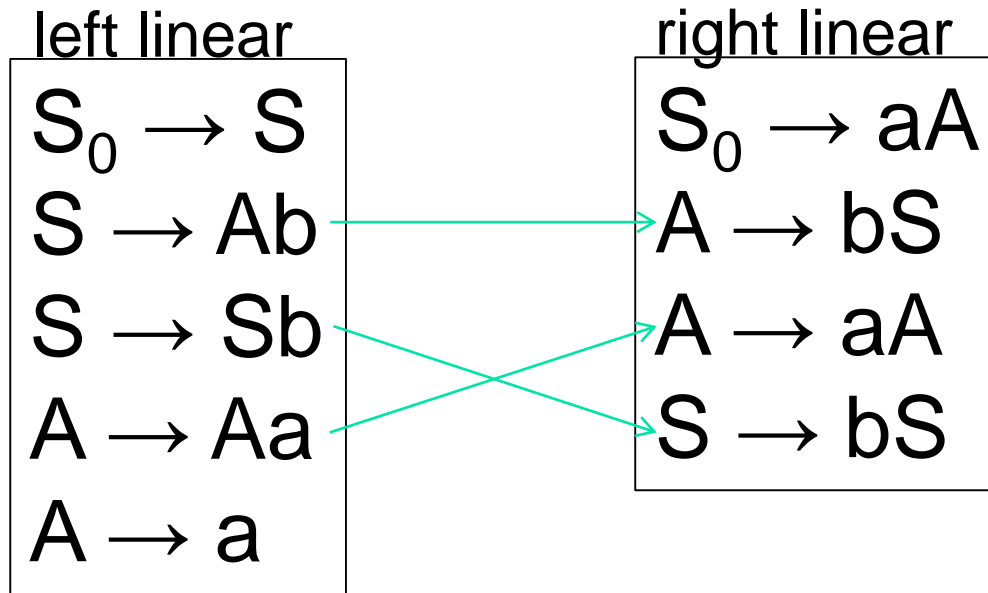

3) If the left linear grammar has a rule  $B \rightarrow Ap$ , add the following rule to the right linear grammar:  $A \rightarrow pB$

# Right hand side of start symbol has non-terminal

left linear

$$S_0 \rightarrow S$$
$$S \rightarrow Ab$$
$$S \rightarrow Sb$$
$$A \rightarrow Aa$$
$$A \rightarrow a$$

right linear

$$S_0 \rightarrow aA$$
$$A \rightarrow bS$$
$$A \rightarrow aA$$
$$S \rightarrow bS$$
$$S \rightarrow \varepsilon$$

- 4) If the left linear grammar has  $S \rightarrow Ap$ , then add the following rule to the right linear grammar:
- $$A \rightarrow p$$



# Equivalent!

---

left linear

$$S_0 \rightarrow S$$

$$S \rightarrow Ab$$

$$S \rightarrow Sb$$

$$A \rightarrow Aa$$

$$A \rightarrow a$$

right linear

$$S_0 \rightarrow aA$$

$$A \rightarrow bS$$

$$A \rightarrow aA$$

$$S \rightarrow bS$$

$$S \rightarrow \varepsilon$$


Both grammars generate this  
language:  $\{a^+b^+\}$



# Will the algorithm always work?

---


- We have seen two examples where the algorithm creates a right linear grammar that is equivalent to the left linear grammar.
- But will the algorithm *always* produce an equivalent grammar?
- Yes! Check *Introduction to Formal Languages* by Gyorgy Revesz for the proof.



# Relationship between regular lang. and type 3 lang. (cont'd)

---

- **Theorem.** The family of type 3 languages is equal to the family of regular languages.
- The *proof* gives a receipt for constructing a type 3 grammar from an automata and vice versa.




# Relationship between regular lang. and type 3 lang. (cont'd)

- $G = (N, T, S, P)$ , FA =  $(Q, \Sigma, q_0, F, \delta)$

For any regular grammar  $G$  (in normal form) there exists a nondeterministic finite automaton  $A$  such that  $L(A) = L(G)$ :

In grammar $G$	In automaton $A$
$T$	$\Sigma = T$
$N$	$Q = N \cup \{f\}, F = \{f\}$
$S$	$q_0 = S$
$q \rightarrow ap$	$p \in \delta(q, a)$
$q \rightarrow a$	$f \in \delta(q, a)$
if $S \rightarrow \epsilon$	add $S$ to $F$



# Relationship between regular lang. and type 3 lang. (cont'd)

- $G = (N, T, S, P)$ , FA =  $(Q, \Sigma, q_0, F, \delta)$

For any deterministic finite automaton there exists a regular grammar  $G$  such that  $L(A) = L(G)$ :

In automaton A	In grammar G
$\Sigma$	$T = \Sigma$
$Q$	$N = Q$
$q_0$	$S = q_0$
$\delta(q, a) = p$	$q \rightarrow ap$
$\delta(q, a) \in F$	$q \rightarrow a$
if $q_0 \in F$	add rule $q_0 \rightarrow \epsilon$





# Applications

---

- Text indexing
  - inverted indexing
  - For each unique word in the database, store all locations that contain it using an NFA or a DFA
- Find pattern P in text T
  - Example: Google querying
- Extensions of this idea:
  - PATRICIA tree, suffix tree



# A few subtle properties of DFAs and NFAs

---

- The machine never really terminates.
  - It is always waiting for the next input symbol or making transitions.
- The machine decides when to consume the next symbol from the input and when to ignore it.
  - (but the machine can never skip a symbol)
- $\Rightarrow$  A transition can happen even *without* really consuming an input symbol (think of consuming  $\varepsilon$  as a free token) – if this happens, then it becomes an  $\varepsilon$ -NFA (**see next lecture**).
- A single transition *cannot* consume more than one (non- $\varepsilon$ ) symbol.



# Summary

---

- Finita Automata
  - Equivalence of DFA & NFA
    - NFA to DFA
- Relationship between regular lang. and type 3 lang.
  - Type 3 grammar normal form.
  - Transforming a type 3 grammar into the normal form