September 2026
Prepared for engineering leadership
Status: live on develop

Agentic Delivery.

A pipeline that pulls real Jira acceptance criteria, real SwaggerHub contracts, and real Figma designs before Kiro writes a single line — so generated code traces to something true, instead of something guessed.

GROUNDS ON	DELIVERY SURFACE	IN PRODUCTION USE SINCE	PROVEN ON
Jira · SwaggerHub · Figma	Kiro (Copilot retired)	2026-09-15	DCP-1529

01 — THE PROBLEM

Vibe coding doesn't survive a real API.

An assistant with no grounding fills gaps with plausible-sounding guesses — a field name, a prop, an acceptance criterion it half-remembers from the ticket title. Those guesses aren't caught until PR review, or worse, QA. Agentic delivery removes the guess entirely.

WITHOUT GROUNDING	WITH AGENTIC DELIVERY
AI guesses API field names	Reads the SwaggerHub schema — exact field names, every time
AI invents component props	Reads `elements.json` + source — real props, real events
AI misses an acceptance criterion	Every AC is pulled from Jira and stated explicitly, up front
Wrong event names on CWP components	A 15-row pitfall table loads into every session
Code is reviewed and found wrong at PR	AC is traced to code before the PR ever opens


---

02 — THE MECHANISM

Three sources, pulled fresh, merged into one brief.

One command at the start of a story fetches the acceptance criteria, the API contract, and the design — then Kiro's steering config auto-loads the result into every session for that story.



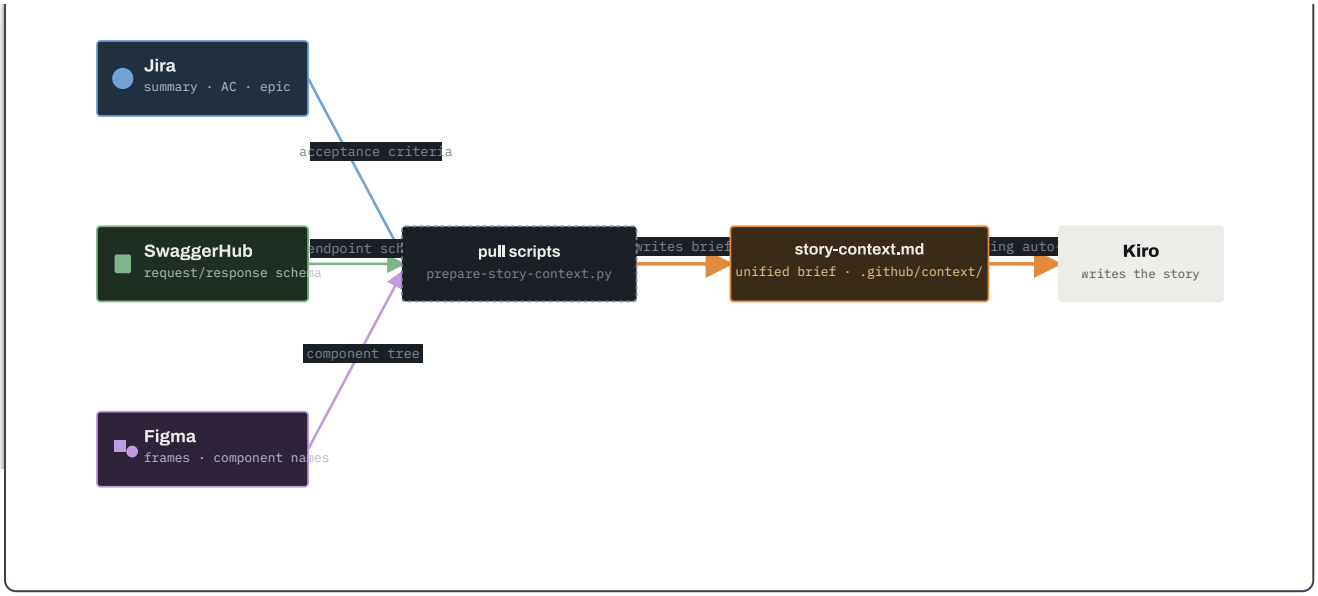

What this shows: a developer runs one script with a Jira key, a Figma file/node, and a SwaggerHub API path. The script fetches all three in parallel, merges them with a scan of the component library, and writes `story-context.md`. Kiro's steering config (`fileMatch` on that path) loads it into context automatically — no manual pasting.

---

03 — PROOF, NOT A MOCKUP

This ran for real, three days ago.

The context below is sitting in `.github/context/` on the working branch right now — generated from an actual sprint story, not a demo fixture.

TIH Overview Leaderboard DCP-1529

EPIC	SWAGGER API PULLED	FIGMA FILE
AC2P-1123	idealpractice-exposure-api / 1.6.0	hqYCh7e3ME… / node 1445:16439

GENERATED

2026-09-16 05:20 UTC

.github/context/

```
├── story-context.md          ← unified brief Kiro reads
├── jira-story.md             summary, AC, epic, assignee
├── swagger-summary.md
├── swagger-specs/
│   └── idealpractice-exposure-api.md
├── figma/
│   ├── figma-designs.md
│   └── figma-images.md
└── component-docs/           13 files, one per detected component
    ├── cwp-card.md  ·  cwp-dropdown.md  ·  cwp-button.md
    ├── acl-table-v3-cell.md  ·  acl-sort-order-menu.md
    └── _index.md              full list, import paths at a glance
```

---

04 — WHAT GROUNDING ACTUALLY CATCHES

The mistakes every new dev makes on this design system.


These aren't hypothetical. This table — loaded into every Kiro session — is the accumulated cost of past PR feedback, paid once instead of per developer.

COMPONENT BEHAVIOR	GUESSED	CORRECT
Button click event	~~`onClick`~~	`onCwpClick`
Dropdown change payload	~~`e.detail.value`~~	`e.detail.selectedValue`
Toggle event key	~~`e.detail.checked`~~	`e.detail.toggleStatus`
Modal open prop	~~`open={true}`~~	`isOpen={true}`
Theme wrapper	~~(none)~~	`<CwpThemeProvider theme="amp-field">`

05 — THE DELIVERY AGENT

Six phases. Two approval gates. One phase deliberately off.

`@agentic-delivery` in Kiro chat drives the story through a fixed sequence — it does not skip ahead, and it does not touch Phase 4 until live app context exists to ground it.

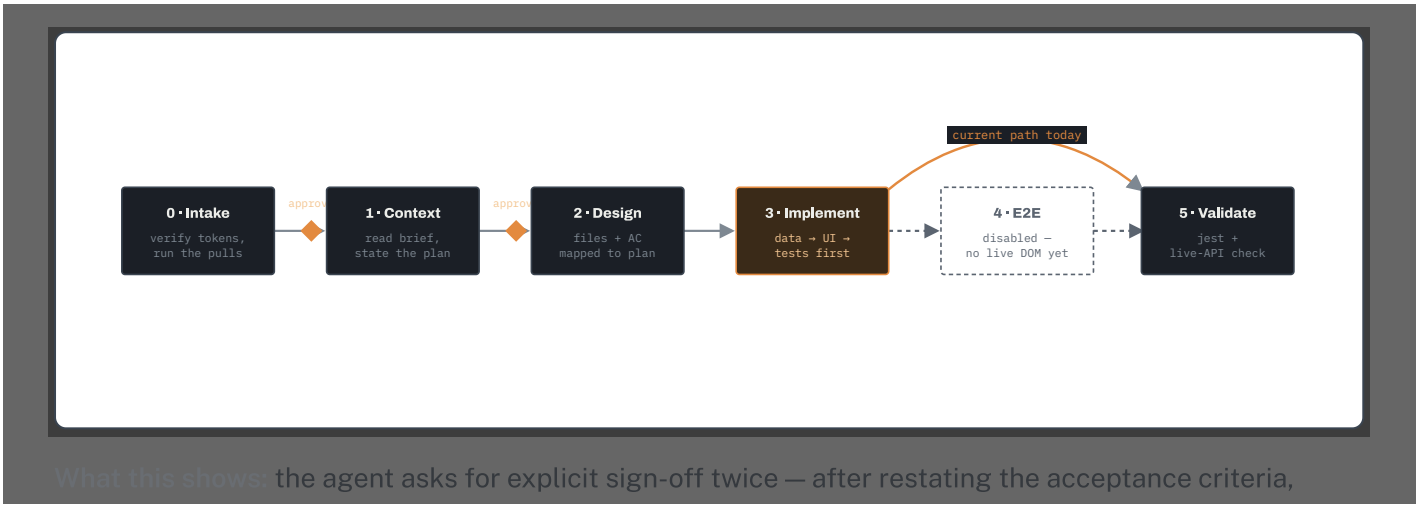

What this shows: the agent asks for explicit sign-off twice — after restating the acceptance criteria, and after proposing the file/design plan — before it writes any implementation code. Phase 4 (e2e generation) stays off until a separate script captures real DOM selectors and OBO data; today, Implementation flows straight to Validate.

06 — GUARDRAILS

What the agent is not allowed to do.

§1

Never invent an API field not present in the SwaggerHub schema.

§2

If a change can't be traced to a Jira AC, an endpoint, or a Figma component — ask before writing it.

§3

Never use a placeholder component when a CWP/ACL equivalent exists.

§4

Loading and error states are always in scope, even when the AC doesn't say so.

§5

Tests are written before the component — happy path, loading, error, empty.

§6

Never commit without a passing test run. Security issues are surfaced, never worked around.

---

07 — WHY THIS MATTERS NOW

Built for two assistants. Standardizing on one.

The workflow shipped with a mirrored agent definition for both Kiro and GitHub Copilot. With the Copilot contract now closed, Kiro is the only delivery surface going forward — and the two copies have already started to drift.

UNTIL NOW

- Agent duplicated at `.kiro/agents/` and `.github/agents/`
- Context-fetch prompts written twice, kept in sync by hand
- The two copies have already diverged — the Copilot version now auto-parses Figma URLs; the Kiro version doesn't

GOING FORWARD

- `.kiro/agents/agentic-delivery.agent.md` is the single source of truth
- Steering + session-start hook auto-load context — no separate Copilot wiring to maintain
- One agent to review, one agent to extend, one place new hires read

08 — WHAT WE NEED FROM LEADERSHIP

Three small asks. No new tooling to buy.

Everything above runs today, on this branch, against production Jira/SwaggerHub/Figma. Nothing here is speculative — it needs adoption, not funding.

1 Token provisioning for the team

Each dev needs a Jira API token, a SwaggerHub key, and a Figma personal access token in three local env files — a five-minute one-time setup, same pattern as the existing Jenkins credentials.

2 Adopt `@agentic-delivery` as the default story starting point

Make running `prepare-story-context.py` the first step of picking up a story, the way pulling the branch already is.

3 Sign off on retiring the Copilot agent copy

Delete `.github/agents/agentic-delivery.agent.md`, reconcile its improvements into the Kiro copy, and stop maintaining two definitions of the same agent.