

Lab 14: RNASeq Mini-Project

Merna Behnam (PID: A17675170)

Table of contents

Background	1
Data Import	1
Check and Tidy	5
Remove zero count genes	5
DESeq Analysis	5
Get Results	7
Volcano Plot	7
Add Annotation	9
Save annotated results	10
Pathway Analysis	10
GO analysis	19

Background

Our data from today comes from a HOX gene knock-out study.

Trapnell C, Hendrickson DG, Sauvageau M, Goff L et al. “Differential analysis of gene regulation at transcript resolution with RNA-seq”. Nat Biotechnol 2013 Jan;31(1):46-53. PMID: 23222703

The authors report on differential analysis of lung fibroblasts in response to loss of the developmental transcription factor HOXA1.

Data Import

We have 2 key input files: counts and metadata

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Loading required package: generics
```

```
Attaching package: 'generics'
```

```
The following objects are masked from 'package:base':
```

```
as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,  
setequal, union
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

```
The following objects are masked from 'package:base':
```

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,  
order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,  
rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,  
unsplit, which.max, which.min
```

```
Attaching package: 'S4Vectors'
```

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

# Import metadata and take a peek
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
          condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
countData = read.csv(countFile, row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0

ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

Check and Tidy

We need to remove the first “length” column from `countData` to have 1:1 correspondance with `colData` rows.

```
countData <- countData[,-1]
```

```
rownames(colData) == colnames(countData)
```

```
[1] TRUE TRUE TRUE TRUE TRUE TRUE
```

Remove zero count genes

Some genes (rows) have no count data (i.e. zero values). We should remove these before any further analysis.

```
to.keep <- rowSums(countData) > 0
countData <- countData[to.keep, ]
```

DESeq Analysis

```
dds <- DESeqDataSetFromMatrix(countData=countData,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```
class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
               ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```

```
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

Get Results

```
res <- results(dds)
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

```
head(res)
```

```
log2 fold change (MLE): condition hoxa1 kd vs control sirna
Wald test p-value: condition hoxa1 kd vs control sirna
DataFrame with 6 rows and 6 columns
```

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
ENSG00000187642	4.03379e-01				

Volcano Plot

Lets add some color to this plot along with cutoff lines for fold-change and P-value

```
library(ggplot2)


# Make a color vector for all genes
mycols <- rep("gray", nrow(res))

# Color blue the genes with fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"

# Color gray those with adjusted p-value more than 0.01
mycols[ res$padj > 0.01 ] <- "gray"

ggplot(res) +
  aes(log2FoldChange,
      -log(padj)) +
  geom_point(col=mycols) +
  geom_vline(xintercept = c(-2,2)) +
  geom_hline(yintercept = -log(0.01))
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (`geom\_point()`).

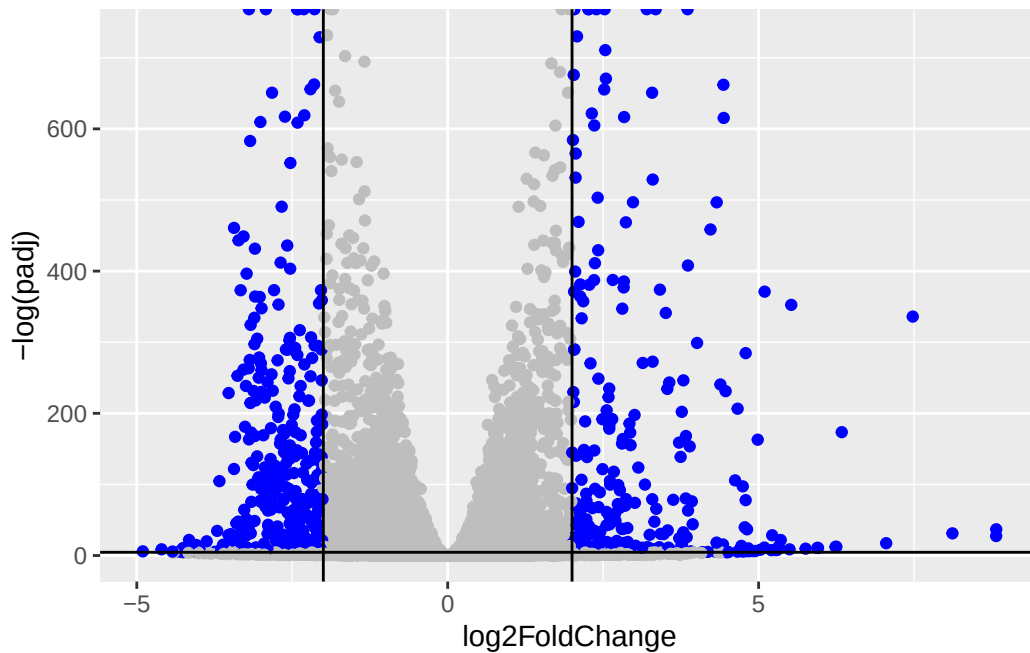

Add Annotation

```
library(AnnotationDbi)
library(org.Hs.eg.db)
```

MapIDs

```
columns(org.Hs.eg.db)
```

[1]	"ACCNUM"	"ALIAS"	"ENSEMBL"	"ENSEMBLPROT"	"ENSEMBLTRANS"
[6]	"ENTREZID"	"ENZYME"	"EVIDENCE"	"EVIDENCEALL"	"GENENAME"
[11]	"GENETYPE"	"GO"	"GOALL"	"IPI"	"MAP"
[16]	"OMIM"	"ONTOLOGY"	"ONTOLOGYALL"	"PATH"	"PFAM"
[21]	"PMID"	"PROSITE"	"REFSEQ"	"SYMBOL"	"UCSCKG"
[26]	"UNIPROT"				

```
res$symbol = mapIds(org.Hs.eg.db,
                     keys=rownames(res),
                     keytype="ENSEMBL",
                     column="SYMBOL")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                     keys=rownames(res),
                     keytype="ENSEMBL",
                     column="ENTREZID")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                   keys=rownames(res),
                   keytype="ENSEMBL",
                   column="GENENAME")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.21963e-16	AGRN	375790	agrin	
ENSG00000237330	NA	RNF223	401934	ring finger protein ..	

Save annotated results

```
write.csv(res, file="results_annotated.csv")
```

Pathway Analysis

```
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```

```
library(gageData)

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
```

```

[17] "114"      "115"      "122481"   "122622"   "124583"   "132"      "158"      "159"
[25] "1633"     "171568"   "1716"     "196883"   "203"      "204"      "205"      "221823"
[33] "2272"     "22978"    "23649"    "246721"   "25885"    "2618"     "26289"    "270"
[41] "271"      "27115"    "272"      "2766"     "2977"     "2982"     "2983"     "2984"
[49] "2986"     "2987"     "29922"    "3000"     "30833"    "30834"    "318"      "3251"
[57] "353"      "3614"     "3615"     "3704"     "377841"   "471"      "4830"     "4831"
[65] "4832"     "4833"     "4860"     "4881"     "4882"     "4907"     "50484"    "50940"
[73] "51082"    "51251"    "51292"    "5136"     "5137"     "5138"     "5139"     "5140"
[81] "5141"     "5142"     "5143"     "5144"     "5145"     "5146"     "5147"     "5148"
[89] "5149"     "5150"     "5151"     "5152"     "5153"     "5158"     "5167"     "5169"
[97] "51728"    "5198"     "5236"     "5313"     "5315"     "53343"    "54107"    "5422"
[105] "5424"     "5425"     "5426"     "5427"     "5430"     "5431"     "5432"     "5433"
[113] "5434"     "5435"     "5436"     "5437"     "5438"     "5439"     "5440"     "5441"
[121] "5471"     "548644"   "55276"    "5557"     "5558"     "55703"    "55811"    "55821"
[129] "5631"     "5634"     "56655"    "56953"    "56985"    "57804"    "58497"    "6240"
[137] "6241"     "64425"    "646625"   "654364"   "661"      "7498"     "8382"     "84172"
[145] "84265"    "84284"    "84618"    "8622"     "8654"     "87178"    "8833"     "9060"
[153] "9061"     "93034"    "953"      "9533"     "954"      "955"      "956"      "957"
[161] "9583"     "9615"

```

```

foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)

```

```

      <NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049

```

```

# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)

```

```

attributes(keggres)

```

```

$names
[1] "greater" "less"    "stats"

```

```

# Look at the first few down (less) pathways
head(keggres$less)

```

```

      hsa04110 Cell cycle      p.geomean stat.mean      p.val
8.995727e-06 -4.378644 8.995727e-06

```

hsa03030	DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013	RNA transport	1.246882e-03	-3.059466	1.246882e-03
hsa03440	Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114	Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010	Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03
		q.val	set.size	exp1
hsa04110	Cell cycle	0.001448312	121	8.995727e-06
hsa03030	DNA replication	0.007586381	36	9.424076e-05
hsa03013	RNA transport	0.066915974	144	1.246882e-03
hsa03440	Homologous recombination	0.121861535	28	3.066756e-03
hsa04114	Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010	Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/mernabehnam/BIMM 143/class14

Info: Writing image file hsa04110.pathview.png

A different PDF based output of the same data

```
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

```

      [,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"

```

Info: Working in directory /Users/mernabehnam/BIMM 143/class14

Info: Writing image file hsa04110.pathview.pdf

```
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/mernabehnam/BIMM 143/class14
```

```
Info: Writing image file hsa04640.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/mernabehnam/BIMM 143/class14
```

```
Info: Writing image file hsa04630.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/mernabehnam/BIMM 143/class14
```

```
Info: Writing image file hsa00140.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```


```
Info: Working in directory /Users/mernabehnam/BIMM 143/class14
```

```
Info: Writing image file hsa04142.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

Info: Working in directory /Users/mernabehnam/BIMM 143/class14

Info: Writing image file hsa04330.pathview.png

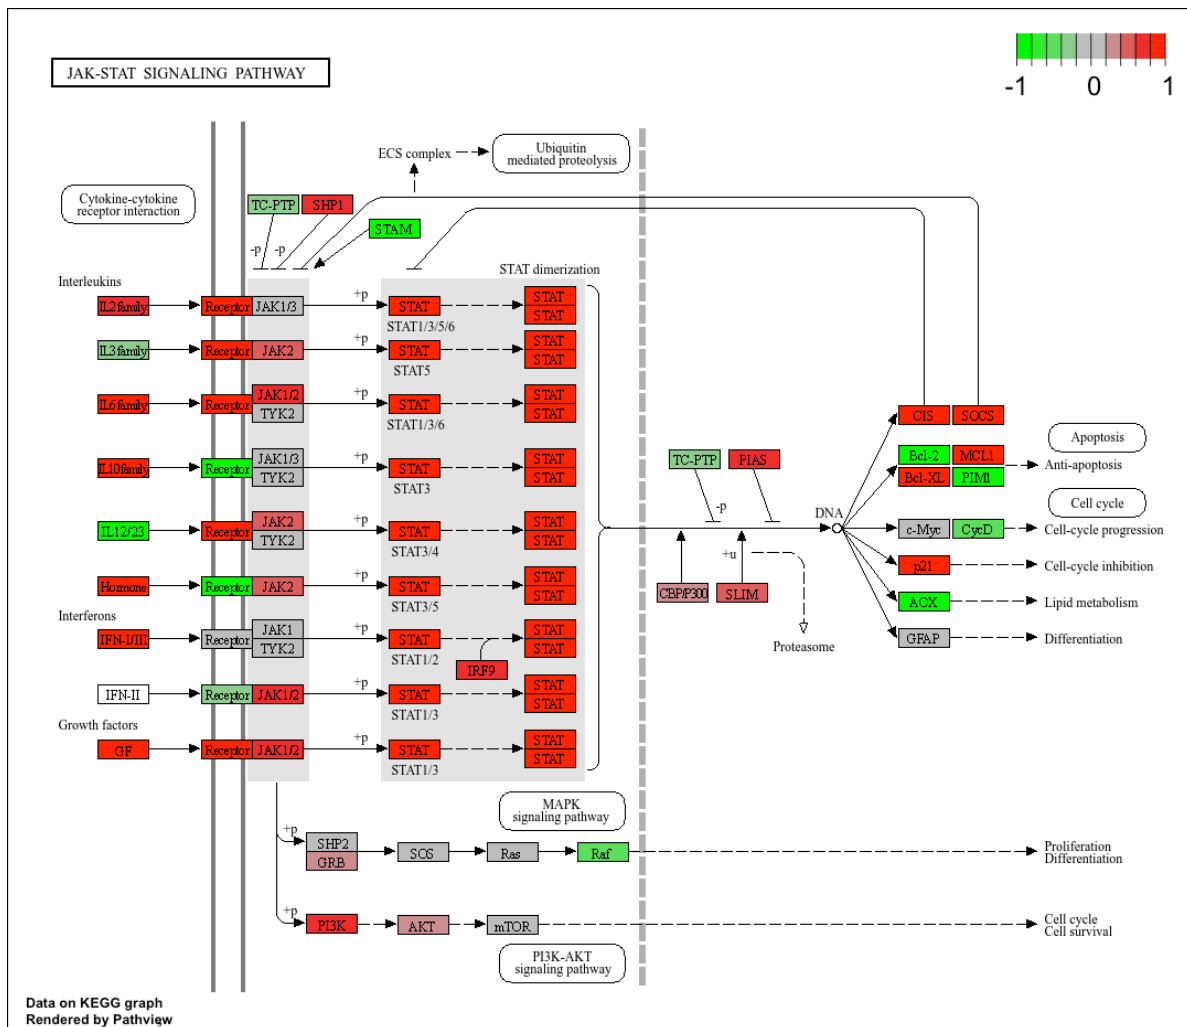


```

data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets)

lapply(gobpres, head)

```

\$greater

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
G0:0002009 morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
G0:0048729 tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04
G0:0007610 behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562 epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295 tube development	5.953254e-04	3.253665	5.953254e-04
	q.val	set.size	expl
G0:0007156 homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009 morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729 tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610 behavior	0.1967577	426	1.925222e-04
G0:0060562 epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295 tube development	0.3565320	391	5.953254e-04

\$less

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10
	q.val	set.size	expl
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14
G0:0007059 chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236 mitotic prometaphase	1.178402e-07	84	1.729553e-10

\$stats

	stat.mean	exp1
GO:0007156 homophilic cell adhesion	3.824205	3.824205
GO:0002009 morphogenesis of an epithelium	3.653886	3.653886
GO:0048729 tissue morphogenesis	3.643242	3.643242
GO:0007610 behavior	3.565432	3.565432
GO:0060562 epithelial tube morphogenesis	3.261376	3.261376
GO:0035295 tube development	3.253665	3.253665

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

Q: What pathway has the most significant “Entities p-value”? Do the most significant pathways listed match your previous KEGG results? What factors could cause differences between the two methods?

Organelle fission (GO:0048285) since it has the smallest p-value (1.54×10^{-15}) among all listed GO terms, making it the most statistically significant result. They can be different because GO and KEGG basically group genes in different ways and use slightly different analysis methods. GO focuses on broad biological processes with lots of overlap, while KEGG is more about specific pathways like signaling or metabolism, so even with the same gene data they might highlight different top results.