



# Modelling the Ecosystem of Rossumøya

## Project description

Hans Ekkehard Plesser

DIRECTOR, ENVIRONMENTAL PROTECTION AGENCY OF PYLANDIA

Ngoc Huynh Bao      Jan-Eirik Welle Skaar  
Hans Marius Johnsen      Mikko Rekstad      Sanjayan Rengarajan  
SPECIAL ADVISORS

Version 2021.2: 2022-01-04

Project in Advanced Programming at REALTEK / NMBU, January 2022.

## 1 Introduction

Rossumøya is a small island in the middle of the vast ocean that belongs to the island nation of Pylandia. The ecosystem on Rossumøya is relatively undisturbed, but Pylandia's Environmental Protection Agency wants to study the stability of the ecosystem. The long term goal is to preserve Rossumøya as a nature park for future generations.

The ecosystem on Rossumøya is characterized by several different landscape types, lowland, highland and desert. The fauna includes only two species, one species of herbivores (plant eaters), and one of carnivores (predators). You shall investigate whether both species can survive in the long term. A detailed description of Rossumøya's geography and fauna is given in section 2. The most important characteristics are

**Herbivores** depend on a good supply of fodder to survive and reproduce.

**Carnivores** depend on the availability of prey. Carnivores are more mobile than herbivores.

**Lowland** provides large amounts of fodder even under intense grazing.

**Highland** provides a limited amount of fodder.

**Desert** does not provide fodder for herbivores.

**Water** is impassable for both species.

A map of Rossumøya is shown in Figure 1.

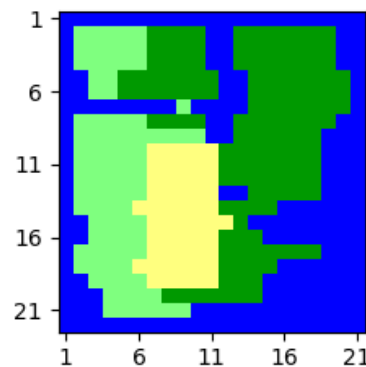


Figure 1: Landscape types on Rossumøya according to the last survey. Blue: Water, dark green: lowland, light green: highland, yellow: desert.

### 1.1 Project task

The Environmental Protection Agency of Pylandia (EPAP) encourages research groups to develop computer programs for the simulation of population dynamics on Rossumøya. EPAP expects that

- groups of two experts
- develop a **population dynamics simulation**
- by **Tuesday, 18 January 2022, 18.00 CET**.

EPAP will hold regular information video seminars on the project during the project period. EPAP expects interim reports in accordance with the milestones shown in Table 1.

Date	Milestone
03 Jan 2022	Code Repository and PyCharm Project
04 Jan 2022	Problem and requirements analysis.
06 Jan 2022	First functional simulation of <i>herbivores</i> in one place (no migration).
07 Jan 2022	Project plan for remaining work.
11 Jan 2022	Correctly working simulation with herbivores and carnivores in one place (no migration).
13 Jan 2022	Working simulation of herbivores and carnivores, all types of terrain and simple visualization.
18 Jan 2022	<b>18.00:</b> Full simulation code with documentation.
21 Jan 2022	<b>15.00:</b> PDF and animation for oral presentation.
24 Jan 2022	<b>08.00–18.00:</b> Presentation and assessment interviews.
25 Jan 2022	<b>08.00–18.00:</b> Presentation and assessment interviews.

Table 1: Project milestones. All times are CET.

Expert groups will by 18 January 2022 deliver source code and documentation to EPAP. Details on how code and documentation are to be delivered will be provided later.

Since EPAP has encountered political controversy about the reliability of the simulations, EPAP places great emphasis on the quality of the delivery. All code development must be traceable through regular commits to a version control system, including all exchange of code between team members. Code should only be written once suitable unit tests are in place and committed.

All participants must present their code and illustrative results during interviews held 24–25 January 2022. Details will be given at a later date.

## 2 The Nature of Rossumøya

### 2.1 Geography

Rossumøya is divided into squares (or cells), where each square is of one of the following five types:

- water,
- desert,
- highland,
- lowland.




Figure 2: An animal that is in the middle cell can move to one of the four neighboring cells but not to cells diagonally displaced (gray).

As an island, Rossumøya is surrounded by water: cells on the outer edges of the map of Rossumøya (see Fig. 1) are therefore always of type “Water”. Animals can only move from the square they are in to one of the four nearest neighbor squares, see Fig. 2. No animal may stay in water.

#### 2.1.1 Water

Water cannot be entered by animals. Cells of type will be completely passive in the simulation. Water may be sea surrounding the island or lakes within the island.

#### 2.1.2 Desert

Animals may stay in the desert, but there is no fodder available to herbivores there. Carnivores can prey on herbivores in the desert.

#### 2.1.3 Highland

Herbivores will find fodder in the highland. Each year, a fixed amount of fodder is available (see also Sec. 2.3):

$$f_{ij} \leftarrow f_{\max}^{\text{Highland}}. \quad (1)$$

Carnivores can prey on herbivores in the highland.

#### 2.1.4 Lowland

The same rules apply as to the highland, but usually more fodder is available in the lowland than the highland, i.e.,

$$f_{\max}^{\text{Lowland}} > f_{\max}^{\text{Highland}}. \quad (2)$$

### 2.2 Fauna

Herbivores and carnivores have certain characteristics in common, but feed in different ways, see section 2.2.1 and 2.2.2. The similarities are as follows<sup>1</sup>:

1. **Age** At birth, each animal has age  $a = 0$ . Age increases by one year for each year that passes.

<sup>1</sup>See section 2.3 for details on how the various processes are distributed throughout the year.

**2. Weight** Animals are born with weight  $w \sim \mathcal{N}(w_{\text{birth}}, \sigma_{\text{birth}})$ , i.e., the birth weight is drawn from a Gaussian distribution with mean  $w_{\text{birth}}$  and standard deviation  $\sigma_{\text{birth}}$ . When an animal eats an amount  $F$  of fodder, its weight increases by  $\beta F$ . Every year, the weight of the animal decreases by  $\eta w$ .

**3. Fitness** The overall condition of the animal is described by its fitness, which is calculated based on age and weight using the following formula

$$\Phi = \begin{cases} 0 & w \leq 0 \\ q^+(a, a_{\frac{1}{2}}, \phi_{\text{age}}) \times q^-(w, w_{\frac{1}{2}}, \phi_{\text{weight}}) & \text{else} \end{cases} \quad (3)$$

where

$$q^{\pm}(x, x_{\frac{1}{2}}, \phi) = \frac{1}{1 + e^{\pm \phi(x - x_{\frac{1}{2}})}}. \quad (4)$$

Note that  $0 \leq \Phi \leq 1$ .

**4. Migration** Animals migrate depending on their own fitness. Animals can only move to the four immediately adjacent cells. Animals cannot move to water cells.

An animal moves with probability  $\mu\Phi$ .

If an animal moves, the destination cell is chosen at random between the four nearest neighbor cells, with equal probability for each direction, see Fig. 2. If the selected destination cell is Water, the animal does not move.

An animal can move only once per year.

**5. Birth** Animals can mate if there are at least two animals of the same species in a cell.

- For each animal in a cell, the probability to give birth to an offspring in a year is

$$\min(1, \gamma \times \Phi \times (N - 1)), \quad (5)$$

where  $N$  is the number of animals of the same species in the cell at the start of the breeding season.

- The probability is therefore 0 if there is only one individual of the species in the cell.
- The probability of birth is also 0 if the weight is  $w < \zeta(w_{\text{birth}} + \sigma_{\text{birth}})$ .
- Gender plays no role in mating.
- Each animal can give birth to at most one offspring per year.
- At birth, the mother animal loses  $\zeta$  times the actual birthweight of the baby.
- If the mother would lose more than her own weight, then no baby is born and the weight of the mother remains unchanged.

**6. Death** An animal dies

- with certainty if its weight is  $w = 0$ ;

- with probability

$$\omega(1 - \Phi) \quad (6)$$

otherwise.

### 2.2.1 Herbivores

Herbivores find fodder exclusively in the low- and highland. Animals residing in a cell eat in descending order of fitness. Each animal tries every year to eat an amount  $F$  of fodder, but how much feed the animal obtain depends on fodder available in the cell, see section 2.1. Given that the animal eats an amount  $\tilde{F}$  of fodder, its weight increases by  $\beta\tilde{F}$ .

### 2.2.2 Carnivores

Carnivores can prey on herbivores everywhere, but do not prey on each other. One carnivore hunts at a time, in random order. When hunting, each carnivore tries to kill one herbivore at a time, beginning with the herbivore with the lowest fitness. A carnivore continues to kill herbivores until

- the carnivore has eaten an amount  $F$ , i.e., eaten herbivores with a total weight  $\geq F$
- or has tried to kill each herbivore in the cell.

Carnivores will kill a herbivore with probability

$$p = \begin{cases} 0 & \text{if } \Phi_{\text{carn}} \leq \Phi_{\text{herb}} \\ \frac{\Phi_{\text{carn}} - \Phi_{\text{herb}}}{\Delta\Phi_{\text{max}}} & \text{if } 0 < \Phi_{\text{carn}} - \Phi_{\text{herb}} < \Delta\Phi_{\text{max}} \\ 1 & \text{otherwise.} \end{cases} \quad (7)$$

The carnivore's weight increases by  $\beta w_{\text{herb}}$ , where  $w_{\text{herb}}$  is the weight of the herbivore killed<sup>2</sup>. The fitness of the carnivore is re-evaluated each time it kills a herbivore.

### 2.2.3 Parameters

The parameters  $w_{\text{birth}}, \sigma_{\text{birth}}, \beta, \eta, a_{\frac{1}{2}}, w_{\frac{1}{2}}, \phi_{\text{age}}, \phi_{\text{weight}}, \mu, \gamma, \zeta, \zeta, \omega, F$ , and  $\Delta\Phi_{\text{max}}$  are identical for all animals of the same species, but may be different between herbivores and carnivores. Example values are given in Table 2 and 3.

## 2.3 The Annual Cycle on Rossumøya

Nature on Rossumøya follows a fixed annual cycle. The components of annual cycle are:

**1. Feeding** Animals eat: first herbivores, then carnivores, see section 2.2.1 and 2.2.2. Growth of fodder in lowland and highland occurs at the very beginning of the year, i.e., immediately before herbivores eat.

<sup>2</sup>If the weight of the herbivore exceeds the amount of food desired by the carnivore, the carnivore eats only the amount it wants. The remainder of the herbivore goes to waste.

Param.	Herb.	Carn.	Name
$w_{\text{birth}}$	8.0	6.0	w_birth
$\sigma_{\text{birth}}$	1.5	1.0	sigma_birth
$\beta$	0.9	0.75	beta
$\eta$	0.05	0.125	eta
$a_{\frac{1}{2}}$	40.0	40.0	a_half
$\phi_{\text{age}}$	0.6	0.3	phi_age
$w_{\frac{1}{2}}$	10.0	4.0	w_half
$\phi_{\text{weight}}$	0.1	0.4	phi_weight
$\mu$	0.25	0.4	mu
$\gamma$	0.2	0.8	gamma
$\zeta$	3.5	3.5	zeta
$\xi$	1.2	1.1	xi
$\omega$	0.4	0.8	omega
$F$	10.0	50.0	F
$\Delta\Phi_{\text{max}}$	—	10.0	DeltaPhiMax

Table 2: Example values for parameters of herbivores and carnivores. These values are used in the examples shown in the text, but have no special meaning. All parameter values shall be positive ( $\geq 0$ ), except for  $\Delta\Phi_{\text{max}}$ , which shall be strictly positive ( $> 0$ ). Furthermore,  $\eta \leq 1$  is required.

Param.	Lowland	Highland	Name
$f_{\text{max}}$	800.0	300.0	f_max

Table 3: Example values for the parameter of Lowland and Highland cells. These values are used in the examples shown in the text, but have no special meaning.

- 2. Procreation** Animals give birth, see section 2.2, No. 5. When calculating the probability of birth according to equation (5), the number of animals  $N$  at the start of the breeding season is used, i.e., newborn animals do not count.
- 3. Migration** Animals migrate to neighboring cells subject to the condition that each animal can migrate at most once per year.
- 4. Aging** Each animal becomes one year older.
- 5. Loss of weight** All animals lose weight, see section 2.2, No. 2.
- 6. Death** For each animal, it is determined whether the animal dies or not, see section 2.2, No. 6.

Steps 1–6 can be seen as the seasons on Rossumøya, i.e., all animals undergo steps simultaneously.

## 3 Guidelines

### 3.1 Development process

All source code shall be managed on a Git repository hosted on GitLab. EPAP representatives shall have

read access to the repository at all times during the development process.

Code changes shall be committed to the repository in small increments, and all code exchange between team members shall be via the team repository.

Basic agile programming principles shall be followed, especially a focus on pair programming and test-driven development using the PyTest framework and automated test runners in GitLab. Intermediate goals, including the milestones defined in Table 1 that pertain to code development (including tests and documentation) shall be defined as *Milestones* in the GitLab repository for the project. Open issues shall be defined as *Issues* in the repository and attached to a *Project* using a standard Kanban setup (to do—in progress—under review—done).

### 3.2 Deliverables

**Software** A Python package

1. compatible with Python 3.8 or later;
2. installable using standard Python distribution tools;
3. structured according to the supplied project template;
4. organized so that a user can carry out simulations using the methods of a class `BioSim`, which forms the interface for the package, see also Appendix C;
5. written in well-structured, documented, and efficient code following PEP8 guidelines (maximum line length 100 characters);
6. including unit and integration tests covering the code (PyTest framework);
7. including user-level documentation of all modules, classes and public methods generated with Sphinx from docstrings, allowing domain experts to use the software;
8. including working examples;
9. passing a standard test of interface tests provided by EPAP and working with the compatibility check script given in Appendix B.

**Presentation** Software and exemplary results will be presented in virtual oral presentations. The presentation shall discuss the main aspects of the chosen implementation, its advantages and disadvantages.

### 3.3 Parameters and Initialization

#### 3.3.1 Geography

The software shall be able to read a Python multi-line string specification of the island’s geography. All lines in the string must have the same length. Each character in the string represents a cell with character code shown in Table 4.

W	water
L	lowland
H	highland
D	desert

Table 4: Codes for landscape types.

The geography string must consist solely of “W” around the edges and no characters other than the letters shown in Table 4 must occur in the string. The software will raise a `ValueError` if any requirements on the geography specification is violated.

The coordinate system for the island is as illustrated in Figure 1:

- The upper left corner has coordinates (1,1).
- Coordinates increase downward and to the right.
- The first coordinate enumerates the rows, the second the columns.

### 3.3.2 Parameters

It shall be possible to specify the parameters of the animal species and landscape types, respectively, by providing a dictionary of proper contents to a suitable method in the package. Four dictionaries are required to provide a complete parameterization. Furthermore, one method setting the parameters is required for each class (herbivores, carnivores, lowland and highland). Additionally, the following guidelines apply to parameters:

1. The parameter names given in Table 2 and 3 shall be used.
2. The software shall have built-in default values for all parameters, so that simulations can be carried out without setting parameters.
3. It shall be possible to change a subset of parameters by providing a dictionary with only those parameters that are to be changed to the method carrying out the parameterization.
4. The parameterisation methods shall report an error if a dictionary contains unknown parameters.
5. The parameterization method shall guard against illegal parameter values, such as negative amounts of fodder.
6. Any errors detected in parameter dictionaries shall raise a `ValueError`.

### 3.3.3 Populations

It shall be possible to place animals on the island before the simulation starts and during breaks in the simulation. Placement will take place by passing a

list<sup>3</sup> to a suitable method in the interface class. The list shall have the following format:

1. Each item in the list is a *dictionary* with two elements, 'loc' (Location) and 'pop' (Population).
2. 'loc' is a tuple with two elements and provides a coordinate on the island, see section 3.3.1. It is an error to specify nonexistent coordinates.
3. 'pop' is a list with one element per animal.
4. Each item in 'pop' is a dictionary with elements 'species', 'age' and 'weight'.
5. The 'species' element has either the value 'Herbivore' or 'Carnivore'.
6. 'age' shall be a non-negative integer.
7. 'weight' shall be a positive number.

The list could, for example, look like this:

```
[{'loc': (3,4),
  'pop': [{'species': 'Herbivore',
            'age': 10, 'weight': 12.5},
          {'species': 'Herbivore',
            'age': 9, 'weight': 10.3},
          {'species': 'Carnivore',
            'age': 5, 'weight': 8.1}]},
 {'loc': (4,4),
  'pop': [{'species': 'Herbivore',
            'age': 10, 'weight': 12.5},
          {'species': 'Carnivore',
            'age': 3, 'weight': 7.3},
          {'species': 'Carnivore',
            'age': 5, 'weight': 8.1}]}
```

For each list item, animals given in 'pop' will be placed in the cell specified by 'loc'.

The program shall ensure that

- all animals have positive weight and non-negative age, and
- animals are only placed in cells where animals can stay;

If a placement violates these conditions, the program shall raise a `ValueError`.

If there are animals in a cell from before, then these will remain in the cell.

### 3.3.4 Random Numbers

Seed values for the random number generator must be set before the simulation starts. Running a simulation twice with the same random seed shall yield identical results.

Use the same random number generator everywhere random numbers are used in the simulation. You shall use the plain Python random module.

<sup>3</sup>More precisely, an *iterable*.

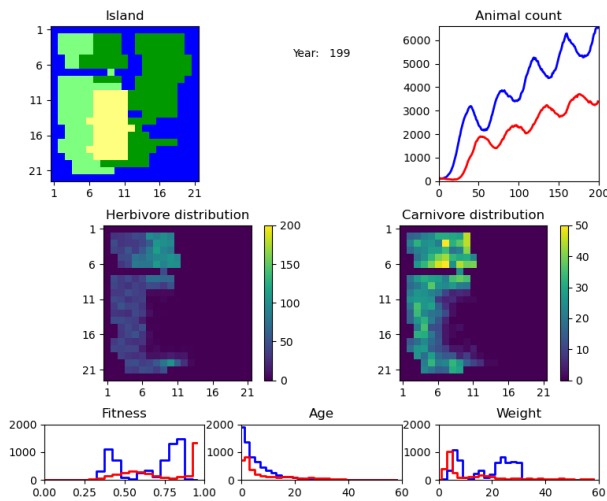


Figure 3: Example of a simulation visualisation. The figure is only meant as an illustration. Teams are encouraged to improve on the graphics.

### 3.4 Simulation and Recording

#### 3.4.1 Simulation

The simulation will run for a given number of years. After that, it shall be possible to investigate the island's status, change parameters, set out more animals, and resume the simulation for further years. One should, e.g., be able to simulate the first 100 years with only herbivores on the island, before a small group of carnivores is added and the simulation continued.

#### 3.4.2 Status Information

When the simulation is stopped, it shall be possible to obtain the following information through Python properties of the BioSim class with prescribed names:

**Year** Number of years that have been simulated (property: year).

**Total number of animals** The total number of animals on the island (property: num\_animals).

**Total number of animals by species** The total number of herbivores and carnivores, respectively, in a dictionary with keys 'Herbivore' and 'Carnivore' (property: num\_animals\_per\_species).

### 3.5 Visualization

The user shall be able to visualize the simulation results while the simulation is in progress, as exemplified in Fig. 3. The visualization shall be in one graphics window with the following elements:

**Geography** The island's geography is shown, with a color code for the landscape types.

**Total number of animals by species** is shown as line graph, with one line for each species.

**Population map** For each species a map shall be provided showing the number of animals per cell using a color code, including color bars.

**Histograms** shall show the distribution of animal ages, weights and fitnesses for herbivores and carnivores.

**Year** The year shall appear in the graphics window.

The user shall be able to specify

- after how many years the graphics are to be updated (the default is each year; setting this to zero shall disable graphics);
- the limits for the vertical axis in the line graph of animal numbers;
- the limits for the color code in the population maps, separate for both species;
- the upper limit and bin width of the histogram for each parameter (age, weight, fitness);
- that the graphic is saved as file, and in this case also
  - directory in which images are to be stored; if not given, no images will be stored;
  - beginning of file name under which images are to be stored;
  - the image file name suffix, which will determine the image format (e.g., pdf, png);
  - after how many years an image is to be saved (default: save on every visualisation update; value must be multiple of interval for updating graphics).

The files that are stored must be numbered consecutively. To allow the user to convert a series of graphics files into a movie using the encoding program ffmpeg, files must be numbered consecutively, eg. bs\_00000.png, bs\_00001.png, bs\_00002.png, ....

More information about creating movies will be provided later.

## 4 Further development

This project opens up many opportunities for further development.

**Optimization** Make the simulation as fast as possible by analyzing the time spent in the program and eliminating bottlenecks. Suggestions for optimization will be given in the January block.

**Serialization** To examine how different changes affect an ecosystem, it may be useful to save the complete state of the ecosystem to file, so that one can continue the simulation from the saved state with various modifications to the environment. Add code that allows the user to save the complete simulation state to file and to restart the simulation from file.

**Graphical User Interface** Create an interactive GUI so the user can choose specific cells to view information from and modify the simulation parameters mid simulation.

**Saving result mid simulation** It is often useful to save the simulation results gradually during the simulation. Add the option to write the status information to a suitable file type on every iteration.

## A Change Log

**Version 2021.2 (2022-01-04)**

Updated Fig. 3 to correctly represent model dynamics.

**Version 2021.1 (2021-12-22)**

Original version

## B Compatibility check

Two compatibility checks are provided by EPAP. The biosim package shall pass both:

- `test_biosim_interface.py` contains a set of tests for the interface of the `BioSim` class and is to be used with `PyTest`.
- `check_sim.py` (see below) is a sample simulation script that shall work with the package you develop. Running the script shall not require any user input.

Both files are available from the project template. The test file shall be included in the `tests` directory in your package, the sample script in the `examples` directory.

No changes shall be made to either file except with express permission of EPAP.

```
# -*- coding: utf-8 -*-

import textwrap
import matplotlib.pyplot as plt

from biosim.simulation import BioSim

"""
Compatibility check for BioSim simulations.

This script shall function with biosim packages written for
the INF200 project January 2022.
"""

__author__ = "Hans Ekkehard Plessner, NMBU"
__email__ = "hans.ekkehard.plessner@nmbu.no"

if __name__ == '__main__':
    plt.ion()

    geogr = """\
                WWWWWWWWWWWWWWWWWWWWWWWWW
                WWWWWWWWWWWWWWWLLLLLLLLLW
                WHHHHHLLLLLWLLLLLLLLLWW
                WHHHHHHHHHHWWLLLLLLWWWW
                WHHHHHLLLLLLLLLLLLLWWWW
                WHHHHHLLLDLHLLHLLWWWW
                WHHLLLLLDDDLHLLHHHHWWWW
                WWHHHHLLLDLHLLHWWWWWWWW
                WHHHLLLLLDLHLLLLLLLWWWW
                WHHHHHLLLDLHLLWWWWWWWW
                WWHHHHLLLLLLLLLWWWWWWWW
                WWWWWWWWWWWWWWWWWWWWWWWW
    """
    geogr = textwrap.dedent(geogr)

    ini_herbs = [{'loc': (10, 10),
                  'pop': [{'species': 'Herbivore',
                           'age': 5,
                           'weight': 20}
                          for _ in range(150)]]]
    ini_carns = [{'loc': (10, 10),
                  'pop': [{'species': 'Carnivore',
                           'age': 5,
                           'weight': 20}
                          for _ in range(40)]]]

    sim = BioSim(island_map=geogr, ini_pop=ini_herbs,
                  seed=123456,
                  hist_specs = {'fitness': {'max': 1.0, 'delta': 0.05},
                                'age': {'max': 60.0, 'delta': 2},
                                'weight': {'max': 60, 'delta': 2}},
                  )

    sim.set_animal_parameters('Herbivore', {'zeta': 3.2, 'xi': 1.8})
    sim.set_animal_parameters('Carnivore', {'a_half': 70, 'phi_age': 0.3,
                                              'omega': 0.3, 'F': 65,
                                              'DeltaPhiMax': 9.})
    sim.set_landscape_parameters('L', {'f_max': 700})

    sim.simulate(num_years=100, vis_years=1)

    sim.add_population(population=ini_carns)
    sim.simulate(num_years=100, vis_years=1)

    plt.savefig('check_sim.pdf')

    input('Press ENTER')
```

## C BioSim class interface

The BioSim class shall have at least the methods and properties specified below, with the semantics specified by the docstrings.

```
class BioSim:
    def __init__(self, island_map, ini_pop, seed,
                  vis_years=1, ymax_animals=None, cmax_animals=None, hist_specs=None,
                  img_dir=None, img_base=None, img_fmt='png', img_years=None,
                  log_file=None):

        """
        :param island_map: Multi-line string specifying island geography
        :param ini_pop: List of dictionaries specifying initial population
        :param seed: Integer used as random number seed
        :param ymax_animals: Number specifying y-axis limit for graph showing animal numbers
        :param cmax_animals: Dict specifying color-code limits for animal densities
        :param hist_specs: Specifications for histograms, see below
        :param vis_years: years between visualization updates (if 0, disable graphics)
        :param img_dir: String with path to directory for figures
        :param img_base: String with beginning of file name for figures
        :param img_fmt: String with file type for figures, e.g. 'png'
        :param img_years: years between visualizations saved to files (default: vis_years)
        :param log_file: If given, write animal counts to this file

        If ymax_animals is None, the y-axis limit should be adjusted automatically.
        If cmax_animals is None, sensible, fixed default values should be used.
        cmax_animals is a dict mapping species names to numbers, e.g.,
        {'Herbivore': 50, 'Carnivore': 20}

        hist_specs is a dictionary with one entry per property for which a histogram shall be shown.
        For each property, a dictionary providing the maximum value and the bin width must be
        given, e.g.,
        {'weight': {'max': 80, 'delta': 2}, 'fitness': {'max': 1.0, 'delta': 0.05}}
        Permitted properties are 'weight', 'age', 'fitness'.

        If img_dir is None, no figures are written to file. Filenames are formed as

            f'{os.path.join(img_dir, img_base)_{img_number:05d}.{img_fmt}}'

        where img_number are consecutive image numbers starting from 0.

        img_dir and img_base must either be both None or both strings.
        """

    def set_animal_parameters(self, species, params):
        """
        Set parameters for animal species.

        :param species: String, name of animal species
        :param params: Dict with valid parameter specification for species
        """

    def set_landscape_parameters(self, landscape, params):
        """
        Set parameters for landscape type.

        :param landscape: String, code letter for landscape
        :param params: Dict with valid parameter specification for landscape
        """

    def simulate(self, num_years):
        """
        Run simulation while visualizing the result.

        :param num_years: number of years to simulate
        """

    def add_population(self, population):
        """
        Add a population to the island

        :param population: List of dictionaries specifying population
        """

    @property
    def year(self):
        """Last year simulated."""

    @property
    def num_animals(self):
        """Total number of animals on island."""

    @property
    def num_animals_per_species(self):
        """Number of animals per species in island, as dictionary."""

    def make_movie(self):
        """Create MPEG4 movie from visualization images saved."""
```