


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
db_customer_testing	10.864 s	5	0	5	0	10	0	5	5


Tag	Scenario			Feature				
Name	T	P	F	S	Т	P	F	S
@db_read	5	0	5	0	1	0	1	0

FEATURES SUMMARY -- 4

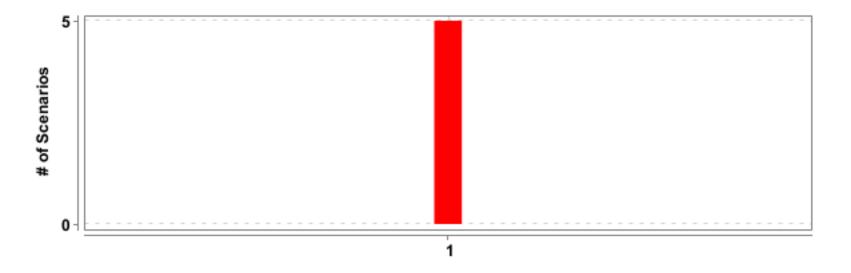

#	Feature Name	T	P	F	S	Duration
1	db_customer_testing	5	0	5	0	10.864 s

SCENARIOS SUMMARY -- 5 --

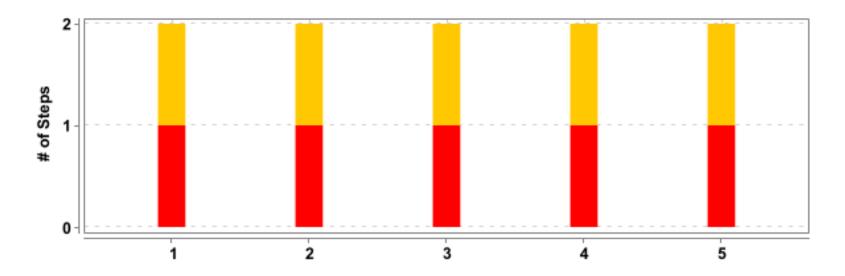


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	db_customer_testing	TC01_read_customer_ssn_info	2	0	1	1	2.904 s
2	db_customer_testing	TC02_read_customer_firstname_info	2	0	1	1	1.824 s
3	db_customer_testing	TC03_read_customer_firstname_info	2	0	1	1	2.175 s
4	db_customer_testing	TC04_read_customer_account_types	2	0	1	1	2.137 s
5	db_customer_testing	TC05_verify_account_types	2	0	1	1	1.676 s

DETAILED SECTION -- 6 --

db_customer_testing

FAILED	DURATION - 10.864 s	Scenarios		Steps	
		Total - 5		Total - 10	
/ 11:19:19.778 AM	/// 11:19:30.642 AM /	Pass - 0	5	Pass - 0	10
		Fail - 5	· J	Fail - 5	10
		Skip - 0		Skip - 5	

TC01_read_customer_ssn_info

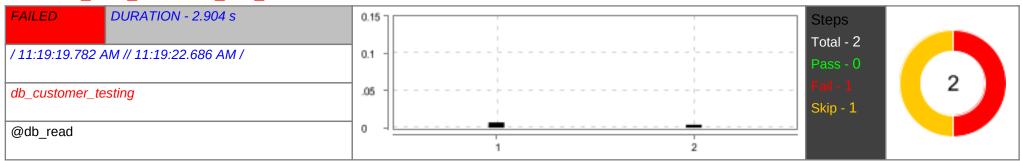


#	Step / Hook Details	Status	Duration
1	And user gets the column "*" from table "jhi_user"	FAILED	0.007 s
	java.lang.NullPointerException at utilities.DBUtils.executeQuery(DBUtils.java:41) at stepdefinitions.DatabaseStepDefinitions.user_gets_the_column_from_table(DatabaseStepDefinitions.java:17) at ?.user gets the column "*" from table "jhi_user"(file:///C:/Users/akdem/IdeaProjects/my-cucumber-project/./src/test/resources/features/jdbc/jdbc_read_data.feature:6) * Not displayable characters are replaced by '?'.		
2	Then user reads all the column "login" data	SKIPPED	0.004 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	PASSED	2.878 s
	failed_scenarioTC01_read_customer_ssn_info		

TC02_read_customer_firstname_info

FAILED DURATION - 1.824 s	1.15	Steps
/ 11:19:22.735 AM // 11:19:24.559 AM /	21 -	Total - 2
/ 11.19.22.735 AW // 11.19.24.559 AW /		Pass - 0
db_customer_testing	05 -	Fail - 1 2
		Skip - 1
@db_read	1 2	
	1 2	

#	Step / Hook Details	Status	Duration
1	And user gets the column "*" from table "jhi_user"	FAILED	0.002 s
	java.lang.NullPointerException at utilities.DBUtils.executeQuery(DBUtils.java:41) at stepdefinitions.DatabaseStepDefinitions.user_gets_the_column_from_table(DatabaseStepDefinitions.java:17) at ?.user gets the column "*" from table "jhi_user"(file:///C:/Users/akdem/IdeaProjects/my-cucumber-project/./src/test/resources/features/jdbc/jdbc_read_data.feature:14) * Not displayable characters are replaced by '?'.		
2	Then user reads all the column "first_name" data	SKIPPED	0.000 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	PASSED	1.818 s
	failed_scenarioTC02_read_customer_firstname_info]	


TC03_read_customer_firstname_info

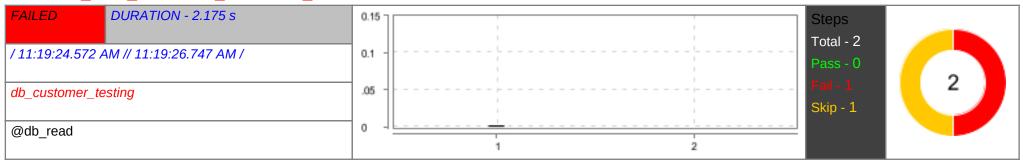

DETAILED SECTION -- 8 --

#	Step / Hook Details	Status	Duration
1	And user gets the column "*" from table "tp_customer"	FAILED	0.002 s
	java.lang.NullPointerException at utilities.DBUtils.executeQuery(DBUtils.java:41) at stepdefinitions.DatabaseStepDefinitions.user_gets_the_column_from_table(DatabaseStepDefinitions.java:17) at ?.user gets the column "*" from table "tp_customer"(file:///C:/Users/akdem/IdeaProjects/my-cucumber-project/./src/test/resources/features/jdbc/jdbc_read_data.feature:21) * Not displayable characters are replaced by '?'.		
2	Then user reads all the column "email" data	SKIPPED	0.000 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	PASSED	2.171 s
	failed_scenarioTC03_read_customer_firstname_info]	

TC04_read_customer_account_types

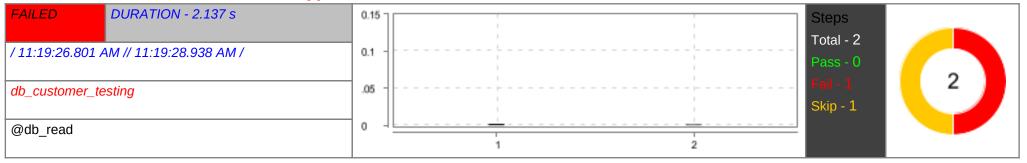

#	Step / Hook Details	Status	Duration
1	And user gets the column "*" from table "tp_account"	FAILED	0.002 s
	java.lang.NullPointerException at utilities.DBUtils.executeQuery(DBUtils.java:41) at stepdefinitions.DatabaseStepDefinitions.user_gets_the_column_from_table(DatabaseStepDefinitions.java:17) at ?.user gets the column "*" from table "tp_account"(file:///C:/Users/akdem/IdeaProjects/my-cucumber-project/./src/test/resources/features/jdbc/jdbc_read_data.feature:26) * Not displayable characters are replaced by '?'.		
2	Then user reads all the column "account_type" data	SKIPPED	0.001 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	PASSED	2.132 s

#	Step / Hook Details	Status	Duration
	failed_scenarioTC04_read_customer_account_types		

TC05_verify_account_types

FAILED	DURATION - 1.676 s	0.15		Steps	
/ 11:19:28.966 A	AM // 11:19:30.642 AM /	0.1 -		Total - 2 Pass - 0	
db_customer_te	esting	.05 -		Fail - 1 Skip - 1	2
@db_read		0 -	1 2		

#	Step / Hook Details	Status	Duration
1	And user gets the column "*" from table "tp_account"	FAILED	0.001 s
	java.lang.NullPointerException		
	at utilities.DBUtils.executeQuery(DBUtils.java:41)		
	at stepdefinitions.DatabaseStepDefinitions.user_gets_the_column_from_table(DatabaseStepDefinitions.java:17)		
	at ?.user gets the column "*" from table "tp_account"(file:///C:/Users/akdem/IdeaProjects/my-cucumber-project/./src/test/resources/features/		
	jdbc/jdbc_read_data.feature:31) * Not displayable characters are replaced by '?'.		
2	Then verify table "tp_account" and column "account_type" contains data "CREDIT_CARD"	SKIPPED	0.001 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	PASSED	1.673 s
	failed_scenarioTC05_verify_account_types		