


| Feature | | Scenario | | | | Step | | | |
|---|----------|----------|---|---|---|------|---|---|----|
| Name | Duration | T | P | F | S | T | P | F | S |
| US_16 Medunna Patient Creation By Admin | 15.324 s | 1 | 0 | 1 | 0 | 17 | 0 | 1 | 16 |

| Tag | | Scer | nario | Feature | | | | |
|----------------|---|------|-------|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @US_016_TC_004 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 4



| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|----------|
| 1 | US_16 Medunna Patient Creation By Admin | 1 | 0 | 1 | 0 | 15.324 s |

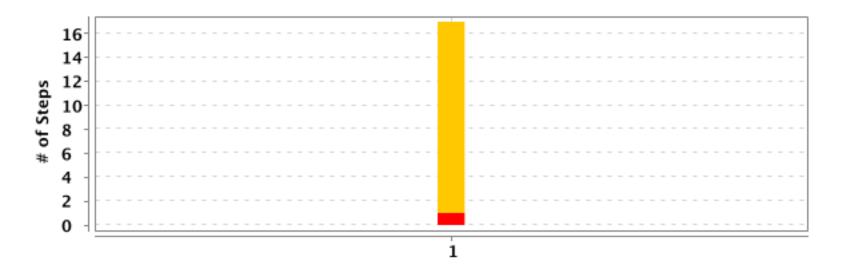


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---------------------------------------|----|---|---|----|----------|
| 1 | US_16 Medunna Patient Creation By Admin | Admin can assign patient their doctor | 17 | 0 | 1 | 16 | 15.322 s |

DETAILED SECTION -- 6 --

US_16 Medunna Patient Creation By Admin

| Scenarios | | Steps | |
|-----------|-----------------------------|-----------------------------|--|
| Total - 1 | | Total - 17 | |
| Pass - 0 | 1 | Pass - 0 | 17 |
| Fail - 1 | | Fail - 1 | 1 / / |
| Skip - 0 | | Skip - 16 | |
| | Total - 1 Pass - 0 Fail - 1 | Total - 1 Pass - 0 Fail - 1 | Total - 1 Pass - 0 Fail - 1 Total - 17 Pass - 0 Fail - 1 |

Admin can assign patient their doctor

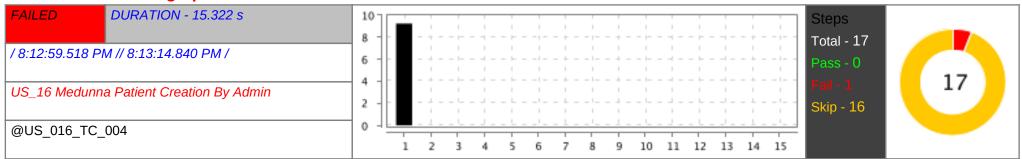

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given user is on the home page : "https://medunna.com" | FAILED | 9.220 s |
| | io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.ui.US_012_TC_01_09_UI | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |
| | $at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda\$run Test Case\$5 (Cucumber Execution Context. java: 130)$ | | |
| | $at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$ | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130) | | |

| | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| | at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.junit.runner.JUnitCore.run(JUnitCore.java:137) | | |
| | at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) | | |
| | at com.intellij.rt.junit.ldeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) | | |
| | at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) | | |
| | at com.intellij.rt.junit.ldeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) | | |
| | at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) | | |
| | at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) | | |
| c | Caused by: java.lang.reflect.InvocationTargetException | | |
| | at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:79) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | 46 more Caused by: org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to | | |
| h | ttp://localhost:55747/devtools/browser/d6bdb617-0ac1-4b7c-97f3-f6b5c40c2355 Build info: version: '4.7.2', revision: '4d4020c3b7' System info: | | |
| 0 | s.name: 'Mac OS X', os.arch: 'x86_64', os.version: '13.2.1', java.version: '19.0.2' Driver info: driver.version: Driver | | |
| | at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:102)</init> | | |
| | at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:128) | | |

| 0.001 s |
|---------|
| 0.001 s |
| 0.000 s |
| 0.003 s |
| 0.001 s |
| 0.005 s |
| 0.000 s |
| 0.000 s |
| 0.000 s |
| 0.001 s |
| 0.000 s |
| 0.000 s |
| 0.000 s |
| 0.004 s |
| 0.001 s |
| 0.000 s |
| 6.016 s |
| |
| |
| |
| |
| |
| |
| |
| |

DETAILED SECTION -- 9 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:114) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:50) at utilities.Driver.getDriver(Driver.java:38) at hooks.Hooks.tearDownScenario(Hooks.java:24)</init></init></init> | | |