



Feature			Scer	nario			St	ер	
Name	Duration	T	P	F	S	T	P	F	S
US_16 Medunna Patient Creation By Admin	15.834 s	1	0	1	0	17	0	1	16

Tag		Scer	nario		Feature			
Name	T	P	F	S	T	P	F	S
@US_016_TC_004	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 4

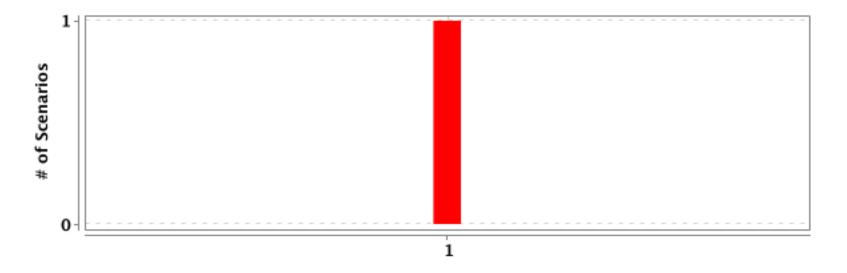

#	Feature Name	T	P	F	S	Duration
1	US_16 Medunna Patient Creation By Admin	1	0	1	0	15.834 s

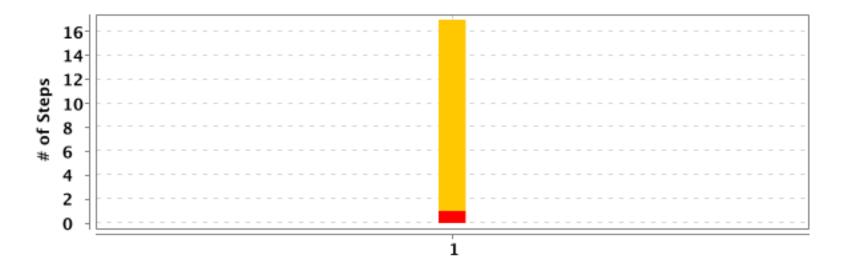


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	US_16 Medunna Patient Creation By Admin	Admin can assign patient their doctor	17	0	1	16	15.831 s

DETAILED SECTION -- 6 --

US_16 Medunna Patient Creation By Admin

FAILED	DURATION - 15.834 s	Scenarios		Steps	
		Total - 1		Total - 17	
/8:19:30.342 PM // 8	8:19:46.176 PM /	Pass - 0	1	Pass - 0	17
		Fail - 1		Fail - 1	1 - 1
		Skip - 0		Skip - 16	

Admin can assign patient their doctor

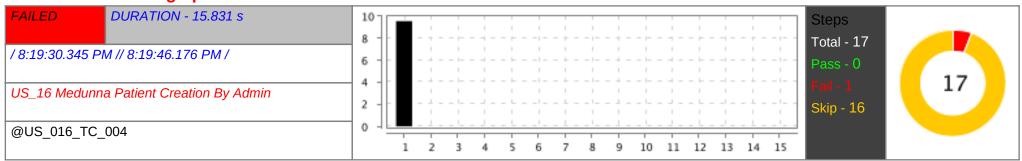

#	Step / Hook Details	Status	Duration
1	Given user is on the home page: "https://medunna.com"	FAILED	9.537 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.ui.US_012_TC_01_09_UI		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	$at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda\$run Test Case\$5 (Cucumber Execution Context. java: 130)$		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4ldeaTestRunner.startRunnerWithArgs(JUnit4ldeaTestRunner.java:69)		
	at com.intellij.rt.junit.ldeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:79)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	46 more Caused by: org.openga.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to		
	http://localhost:55818/devtools/browser/5849eb6f-6daa-4cae-a3bd-503f27f04bbe Build info: version: '4.7.2', revision: '4d4020c3b7' System info:		
	os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '13.2.1', java.version: '19.0.2' Driver info: driver.version: Driver		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:102)</init>		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:128)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:107)		
	at org.openqa.selenium.devtools.Connection. <init>(Connection.java:78)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver.lambda\$new\$2(ChromiumDriver.java:116)		
	at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:114)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:114)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. selenium .chromeDriver.		
	at utilities.Driver.getDriver(Driver.java:38)		
	at pages.HomePage. <init>(HomePage.java:11)</init>		
	at stepdefinitions.ui.US_012_TC_01_09_UI. <init>(US_012_TC_01_09_UI.java:18)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
2	When user clicks on user icon	SKIPPED	0.002 s
3	Then user clicks on Sign In Button	SKIPPED	0.000 s
4	And user enters valid username "AdminTeam01" in username input	SKIPPED	0.000 s
5	And user enters valid password "Team01+" in password input	SKIPPED	0.001 s
6	And user clicks on Remember Me checkbox	SKIPPED	0.000 s
7	And user clicks on Sign In submit Button	SKIPPED	0.002 s
8	And user clicks on Items&Titles option	SKIPPED	0.000 s
9	And user clicks patient on Items&Titles	SKIPPED	0.000 s
10	When Admin clicks on Items-Titles	SKIPPED	0.001 s
11	And Admin clicks on Appointment	SKIPPED	0.001 s
12	And Admin clicks an ID of A patient	SKIPPED	0.000 s
13	And Admin clicks edit button for patient	SKIPPED	0.001 s
14	And Admin choose a doctor on physician	SKIPPED	0.001 s
15	And Admin choose a patient on patient	SKIPPED	0.000 s
16	And Admin clicks save button of appointment	SKIPPED	0.002 s
17	Then Admin verify that the doctor assigned the patient	SKIPPED	0.000 s
	AFTER - hooks.Hooks.tearDownScenario(io.cucumber.java.Scenario)	FAILED	6.211 s
	org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://localhost:55830/devtools/		
	browser/36c4662f-e926-4611-a3cd-d7f1fdeba379 Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Mac OS X', os.arch:		
	'x86_64', os.version: '13.2.1', java.version: '19.0.2' Driver info: driver.version: Driver at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:102)</init>		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:102) at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:128)		
	at org.openqa.selenium.remote.http.netty.NettyVebsocket.lambdaseleatess(NettyVebsocket.java:125)		
	at org.openqa.selenium.devtools.Connection. <init>(Connection.java:78)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver.lambda\$new\$2(ChromiumDriver.java:116)		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at java.base/java.util.Optional.map(Optional.java:260) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:114) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:50) at utilities.Driver.getDriver(Driver.java:38) at hooks.Hooks.tearDownScenario(Hooks.java:24)</init></init></init>		