



Exercise 1 *ex1-tut1.zip*

Express the following states machine using an Event B machines and check properties on the resulting models.

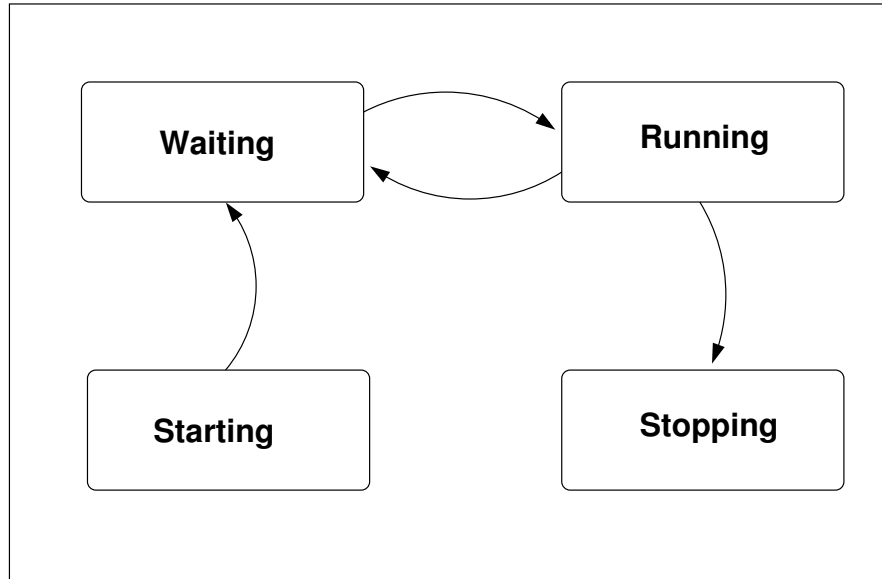


Exercise 2 *ex2-tut1.zip*

Express the following states machine using an Event B machines and check properties on the resulting models.

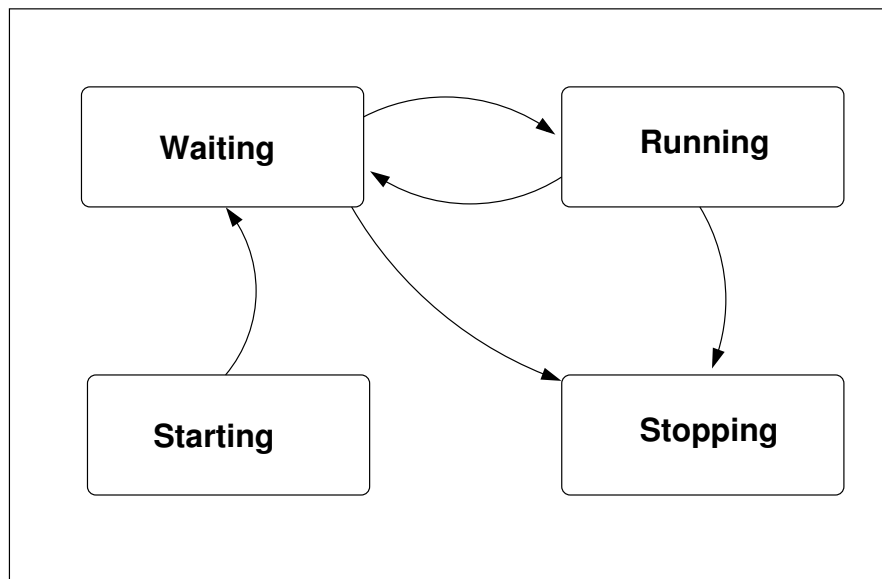

Exercise 3 *to do*

Express the following states machine using an Event B machines and check properties on the resulting models.

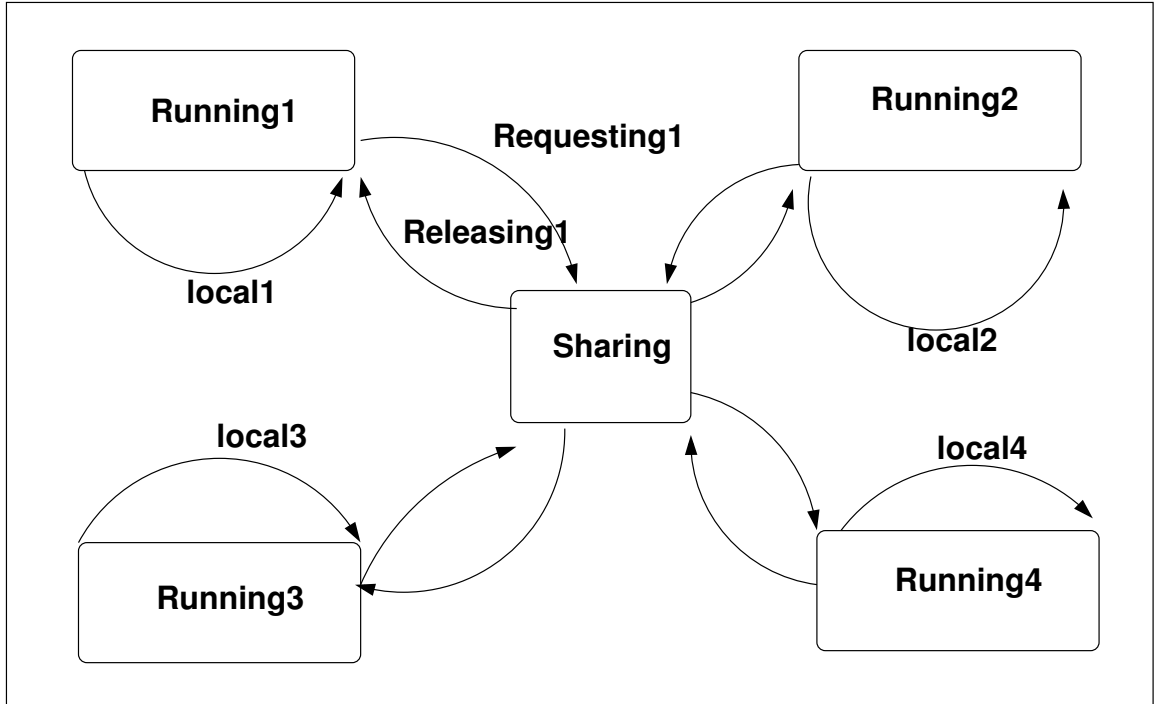

Exercise 4 *ex4-tut1.zip*

We consider a finite sequence of integers v_1, \dots, v_n where n is the length of the sequence and is supposed to be fixed. Write an Event B specification modelling the computation of the value of the summation of the sequence v . You should define carefully v , n and the summation of a finite sequence of integers.

Exercise 5 *ex51-tut1.zip* and *ex52-tut1.zip*

Express the following property in Event B :

- (*ex51-tut1.zip*) We assume to have p resources which may be shared by n processes. If a process uses a given resource, the resource can not be used by another process. A process can use only at most one resource.
- (*ex52-tut1.zip*) We assume to have p resources which may be shared by $nmcs$ processes. If a process uses a given resource, the resource can not be used by another process. A process can use possibly more than one resource. .

Exercise 6 *ex6-tut1.zip*

A Petri net is a tuple $R=(S,T,F,K,M,W)$

- S is a finite set of places.
- T is a finite set of transitions.
- $S \cap T = \emptyset$
- F is the flow relation : $F \subseteq S \times T \cup T \times S$
- K is expressing the capacity of each place :
 $K \in S \rightarrow \text{Nat} \cup \{\omega\}$
- M is representing the initial marking of each place :
 $M \in S \rightarrow \text{Nat} \cup \{\omega\}$ and satisfies the following condition $\forall s \in S : M(s) \leq K(s)$.
- W is the weight of each edge :
 $W \in F \rightarrow \text{Nat} \cup \{\omega\}$

The state of a Petri net R is defined by a set of markings :

- a marking M for R is a function from S to $\text{Nat} \cup \{\omega\}$:
 $M \in S \rightarrow \text{Nat} \cup \{\omega\}$ and it satisfies the condition $\forall s \in S : M(s) \leq K(s)$.
- a transition t of T is ready to fire for a marking M of R , if

1. $\forall s \in \{s' \in S \mid (s', t) \in F\} :$

$$M(s) \geq W(s, t).$$

2. $\forall s \in \{s' \in S \mid (t, s') \in F\} :$

$$M(s) \leq K(s) - W(s, t).$$


— $t \in T : Pre(t) = \{s' \in S : (s', t) \in F\}$ and $Post(t) = \{s' \in S : (t, s') \in F\}$

The simulation of a Petri net is defined by a relation linking three elements : a marking M , a marking M' and a transition t as follows :

— the new marking M' is defined as follows from M :

$$M'(s) = \begin{cases} M(s) - W(s, T), & \text{SI } s \in PRE(T) - POST(T) \\ M(s) + W(T, S), & \text{SI } s \in POST(T) - PRE(T) \\ M(s) - W(s, T) + W(T, S), & \text{SI } s \in PRE(T) \cap POST(T) \\ M(s), & \text{SINON} \end{cases}$$

We consider the following Petri net :

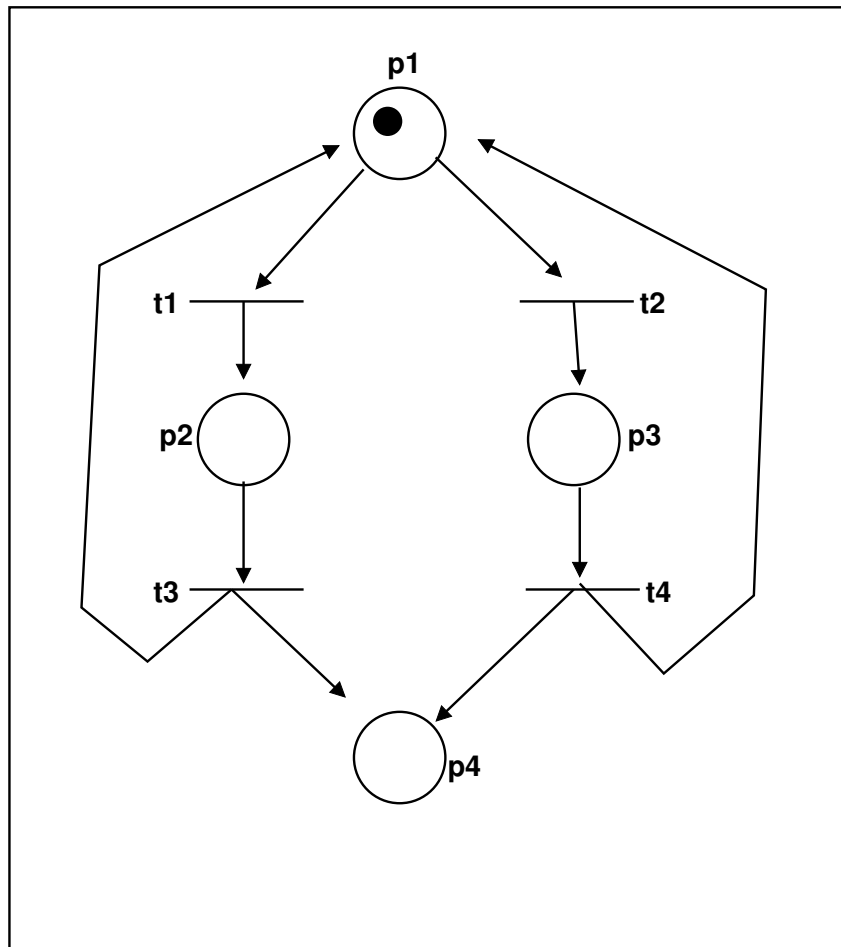

Question 6.1 Translate this Petri net in Event B.

Question 6.2 Express safety properties that you can discover from the diagram.

Exercice 7 (ex7-tut1.zip)

Nous considérons le modèle suivant.

```

MACHINEM1
VARIABLES
   $x$ 
INVARIANTS
  ...
EVENTS
EVENT INITIALISATION
  BEGIN
     $act1 : x := -10$ 
  END
EVENT evt1
  WHEN
     $grd1 : x \geq -1$ 
  THEN
     $act1 : x := x+1$ 
  END
EVENT evt2
  WHEN
     $grd1 : x \leq -1$ 
     $grd2 : x \geq -44$ 
  THEN
     $act1 : x := x-1$ 
  END
END

```

On considère plusieurs cas pour l'invariant.

Question 7.1 (M1)

$inv1 : x \in \mathbb{Z}$
 $inv3 : x \leq -1$

Est-ce que toutes les conditions de vérification sont prouvées par le prouveur de l'application Rodin ? Expliquez clairement pourquoi elles sont prouvées ou non.

Question 7.2 (M2)

$inv1 : x \in \mathbb{Z}$
 $inv3 : x \leq -3$

Est-ce que toutes les conditions de vérification sont prouvées par le prouveur de l'application Rodin ? Expliquez clairement pourquoi elles sont prouvées ou non.

Question 7.3 (M3)

$inv1 : x \in \mathbb{Z}$
 $inv4 : -45 \leq x \wedge x \leq -10$

Est-ce que toutes les conditions de vérification sont prouvées par le prouveur de l'application Rodin ? Expliquez clairement pourquoi elles sont prouvées ou non.

Question 7.4 (M4)

$inv1 : x \in \mathbb{Z}$
 $inv3 : x \leq -3$
 $inv4 : -45 \leq x \wedge x \leq -10$
 $inv2 : x \leq -1$

Est-ce que toutes les conditions de vérification sont prouvées par le prouveur de l'application Rodin ? Expliquez clairement pourquoi elles sont prouvées ou non.

Exercise 8 *ex8-tut1.zip*

A semaphore s is a shared variable accessible by two operations : $P(s)$ and $V(s)$. Informally, we can describe the effect of these two operations as follows :

- $P(s)$ is testing if the value of s is greater than 0 and is not equal to 0. If the value of s is 0, the process which is executing $P(s)$ is inserted in a queue.
- $V(s)$ is increasing the value of s by one, if the queue is non empty. If the queue is non empty, the first waiting process of the queue is awoken and becomes a lively process.

Using the Event B modelling features, describe a system using the primitives.

Exercise 9 *ex-matrix.zip*

We assume that two $n \times n$ matrices of boolean values are given : A and B .

Write an Event B specification modelling the multiplication of the two matrices.

Exercise 10 (*mcfsi1-variant*)

A system is used to sum two numbers x_0 and y_0 by adding one unit to a variable z . It includes an $incx2z$ event which decreases the value of x by one and increases the value of z by one, and an $incy2z$ event which decreases y by one and increases z by one. The overall process stops when the two variables x and y are zero.

Write a model in Event-B for the system.