



## **TUGAS AKHIR - EC184801**

# **OPTIMISASI PENDETEKSIAN OBJEK KECIL YOLOv7 UNTUK MENDETEKSI OBJEK-OBJEK AIRBORNE**

**Dion Andreas Solang**

NRP 0721 19 4000 0039

Dosen Pembimbing

**Reza Fuad Rachmadi, S.T., M.T., Ph.D**

NIP 19850403201212 1 001

**Dr. I Ketut Eddy Purnama, S.T., M.T.**

NIP 19690730199512 1 001

**Program Studi Strata 1 (S1) Teknik Komputer**

Departemen Teknik Komputer

Fakultas Fakultas Teknologi Elektro dan Informatika Cerdas

Institut Teknologi Sepuluh Nopember

Surabaya

2023

*[This page intentionally left blank]*



## **TUGAS AKHIR - EC184801**

# **OPTIMISASI PENDETEKSIAN OBJEK KECIL YOLOv7 UNTUK MENDETEKSI OBJEK-OBJEK AIRBORNE**

**Dion Andreas Solang**

NRP 0721 19 4000 0039

Dosen Pembimbing

**Reza Fuad Rachmadi, S.T., M.T., Ph.D**

NIP 19850403201212 1 001

**Dr. I Ketut Eddy Purnama, S.T., M.T.**

NIP 19690730199512 1 001

**Program Studi Strata 1 (S1) Teknik Komputer**

Departemen Teknik Komputer

Fakultas Fakultas Teknologi Elektro dan Informatika Cerdas

Institut Teknologi Sepuluh Nopember

Surabaya

2023

*[This page intentionally left blank]*



## **FINAL PROJECT - EC184801**

# **YOLOv7 SMALL OBJECT DETECTION OPTIMIZATION TO DETECT AIRBORNE OBJECTS**

**Dion Andreas Solang**

NRP 0721 19 4000 0039

Advisor

**Reza Fuad Rachmadi, S.T., M.T., Ph.D**

NIP 19850403201212 1 001

**Dr. I Ketut Eddy Purnama, S.T., M.T.**

NIP 19690730199512 1 001

**Undergraduate Study Program of Computer Engineering**

Department of Computer Engineering

Faculty of Faculty of Intelligent Electrical and Informatics Technology

Sepuluh Nopember Institute of Technology

Surabaya

2023

*[This page intentionally left blank]*

## ABSTRAK

Nama Mahasiswa : Dion Andreas Solang  
Judul Tugas Akhir : OPTIMISASI PENDETEKSIAN OBJEK KECIL YOLOv7 UNTUK MENDETEKSI OBJEK-OBJEK *AIRBORNE*  
Pembimbing : 1. Reza Fuad Rachmadi, S.T., M.T., Ph.D  
2. Dr. I Ketut Eddy Purnama, S.T., M.T.

Pada penelitian ini, kami menunjukkan percobaan kami untuk meningkatkan kemampuan deteksi YOLOv7 terhadap objek *airborne*. Objek-objek di *airborne* tampak sangat kecil pada gambar kamera ketika berada dalam jarak yang jauh. Namun, karena kecepatan pergerakan objek *airborne* itu tinggi, penting untuk mendeteksinya saat masih berada dalam jarak yang jauh. Oleh karena itu, YOLOv7 perlu dioptimalkan untuk dapat mendeteksi objek-objek kecil dengan baik. Dalam penelitian ini, kami mengusulkan beberapa modifikasi yang berupa perubahan dalam arsitektur (menambahkan kepala deteksi tambahan, mengalihkan skala fitur deteksi, dan mengganti *head* YOLO dengan *decoupled anchor-free head*), penerapan teknik *bag-of-freebies* (rekalkulasi anchor dan augmentasi mosaik), serta merubah proses inferensi (mempartisi gambar dan melakukan inferensi pada setiap partisi). Melalui eksperimen yang komprehensif, kami menemukan bahwa kombinasi penggantian *head* YOLO dengan *decoupled anchor-free head* dan melakukan inferensi pada partisi-partisi menghasilkan model yang memiliki peningkatan paling signifikan pada *mean average precision* (mAP) yaitu sebesar 46,18% dan tetap mempertahankan kecepatan inferensi yang *real-time* ( $>10$  FPS). Peningkatan ini jauh lebih tinggi dibandingkan dengan YOLOv7 polos tanpa modifikasi yang hanya mampu mencapai skor mAP sebesar 0%.

**Kata Kunci:** *Deteksi Objek Kecil, YOLOv7, Modifikasi Arsitektur, Modifikasi Bag-of-Freebies, Objek Airborne*

*[This page intentionally left blank]*

## ABSTRACT

*Name : Dion Andreas Solang*  
*Title : YOLOv7 SMALL OBJECT DETECTION OPTIMIZATION TO DETECT AIRBORNE OBJECTS*  
*Advisors : 1. Reza Fuad Rachmadi, S.T., M.T., Ph.D*  
*2. Dr. I Ketut Eddy Purnama, S.T., M.T.*

*In this research, we present an attempt to improve the detection capability of YOLOv7 for airborne objects. Airborne objects appear considerably small in camera images when they are located at a considerable distance from the camera. However, due to their high speed of movement, it is crucial to detect them while they are still far away. Therefore, to effectively detect these objects, YOLOv7 needs to be optimized for small objects. To address this challenge, we proposed several modifications that include changes in the architecture (adding an extra detection head, modifying the feature-map source, and replacing the detection head with a detached anchor-free head), application of bag-of-freebies techniques (anchor recalculation and mosaic augmentation), and change in the inference process (partitioning the image and performing inference on each partition). Through comprehensive experimentation, we have discovered that the combination of replacing the detection head with a detached anchor-free head, and performing inference on partitions yields the most promising results, with a significant increase in mean average precision (mAP) of 46.18% while still maintaining real-time inference speed (greater than 10 FPS). This improvement is notably higher compared to the unmodified plain YOLOv7, which achieved an mAP score of 0%.*

**Keywords:** *Small Object Detection, YOLOv7, Architecture Modification, Bag-of-Freebies Modification, Airborne Object*

*[This page intentionally left blank]*

## **PREFACE**

This research was made as a final project to fulfill the requirement for graduating in Computer Engineering Department of ELECTICS - ITS. The dataset used in this research is under CDLA-Permissive 1.0. Figures and tables reproduced in this report was either under creative commons license or reproduced with the original author's permission.

Surabaya, July 2023

Dion Andreas Solang

*[This page intentionally left blank]*

# TABLE OF CONTENTS

<b>ABSTRAK</b>	<b>i</b>
<b>ABSTRACT</b>	<b>iii</b>
<b>PREFACE</b>	<b>v</b>
<b>TABLE OF CONTENTS</b>	<b>vii</b>
<b>LIST OF FIGURES</b>	<b>ix</b>
<b>LIST OF TABLES</b>	<b>xi</b>
<b>1 INTRODUCTION</b>	<b>1</b>
1.1 Background . . . . .	1
1.2 Problem Statement . . . . .	3
1.3 Purpose . . . . .	3
1.4 Problem Scope . . . . .	3
<b>2 LITERATURE REVIEW</b>	<b>5</b>
2.1 Theoretical Basis . . . . .	5
2.1.1 Object Detection Task . . . . .	5
2.1.2 YOLO Family Architecture . . . . .	8
2.1.3 YOLOv7 . . . . .	12
2.1.4 Anchor Recalculation . . . . .	15
2.1.5 Mosaic Augmentation . . . . .	16
2.2 Related Works . . . . .	17
2.2.1 YOLOv4-tiny with added head . . . . .	17
2.2.2 exYOLO . . . . .	17
2.2.3 YOLO-Z . . . . .	17
<b>3 METHODS</b>	<b>21</b>
3.1 Model Searching Method . . . . .	21
3.2 Modification Candidates . . . . .	22
3.2.1 Mosaic Augmentation . . . . .	22

3.2.2	Pre-training Anchor Recalculation . . . . .	22
3.2.3	Replacing Localization Loss to Extended IoU . . . . .	22
3.2.4	Utilizing Earlier Feature Map Stage . . . . .	23
3.2.5	Additional YOLO Head . . . . .	23
3.2.6	Replace YOLO Head to Decoupled Anchor-free Head . . . . .	24
3.2.7	Partitioning Image . . . . .	24
3.3	Computational Resource . . . . .	26
3.4	Pilot Test . . . . .	26
3.5	Dataset Preparation . . . . .	27
3.5.1	Dataset Source . . . . .	27
3.5.2	Dataset Sampling . . . . .	28
<b>4</b>	<b>EXPERIMENTS</b>	<b>33</b>
4.1	Baseline Performance . . . . .	33
4.2	Mosaic Augmentation and Anchor Recalculation . . . . .	33
4.3	Replacing Localization Loss to EIoU . . . . .	35
4.4	Utilizing Earlier Feature Map Stage . . . . .	36
4.5	Additional YOLO Detection Head . . . . .	36
4.6	Decoupled Anchor-free Head . . . . .	37
4.7	Partitioning Image . . . . .	37
4.8	Latency . . . . .	41
<b>5</b>	<b>CONCLUSION</b>	<b>43</b>
5.1	Conclusion . . . . .	43
<b>REFERENCES</b>		<b>45</b>
<b>APPENDIX A</b>		<b>47</b>
<b>APPENDIX B</b>		<b>53</b>
<b>APPENDIX C</b>		<b>57</b>
<b>AUTHOR'S BIOGRAPHY</b>		<b>59</b>

# LIST OF FIGURES

1.1	An example of airborne object dataset	1
1.2	YOLOv7 performance on COCO dataset compared to other object detectors.	2
2.1	Three Cases of Bounding Boxes Intersection	6
2.2	Intersection and Union of 2 Bounding Boxes	6
2.3	PR Points Generated by Varying $\tau$	9
2.4	PR Curve Interpolated	9
2.5	Feature Pyramid Network in YOLOv3	10
2.6	Head Layer Prediction for Anchor Box and Its Offsets from Lattice of The Feature Grid	11
2.7	ELAN in YOLOv7	13
2.8	YOLOv7 Label Assignment Strategy with Auxilary Heads	15
2.9	Four example of mosaic augmentation	16
2.10	Comparison of regular YOLOv4-tiny and YOLOv4-tiny with added head	18
2.11	Architecture of exYOLO	18
2.12	Small objects in the image. Comparison of YOLOZ-S and YOLOv5-S. YOLOv5-S was not able to detect the circled objects.	19
3.1	Search Steps	21
3.2	Cause of IoU vanishing gradient	22
3.3	Rerouting Neck Connection to Earlier Stage	23
3.4	Adding an Extra Head Layer	24
3.5	Decoupled Anchor-free Head	25
3.6	An Image Partitioned to 4 Images	25
3.7	Distribution of Bounding Boxes' Area	29
3.8	Distribution of Bounding Boxes' Widths and Heights	29
3.9	Distribution of Objects' Position	29
4.1	An example of mosaic augmented image	34
4.2	Anchor Distribution on Dataset. Left: Original Anchor. Right: Recalculated Anchors	34
4.3	Modifying Connection to Earlier Feature Map Stage	36
4.4	Model Architecture After Increasing The Head	37

4.5	Example Image Source for Cropping . . . . .	38
4.6	Cropping without Strategy (Random Center) . . . . .	38
4.7	Cropping with Strategy . . . . .	38

## LIST OF TABLES

3.1	Pilot Test Training	26
3.2	Original Dataset Splits	28
3.3	Dataset Objects' Classes Distribution	28
3.4	Dataset Sampling Distribution	30
4.1	Anchor Points Before and After Recalculation	33
4.2	Mosaic Augmentation and Anchor Recalculation Performance	35
4.3	EIoU Localization Loss Performance	35
4.4	Performance of The Rerouted Model	36
4.5	Additional Head Performance	37
4.6	Anchor-free Head Performance	38
4.7	Partitioning Image Performance	40
4.8	Inference Speed of Modified Models	41

*[This page intentionally left blank]*

# CHAPTER I

## INTRODUCTION


### 1.1 Background

Autonomous Aerial Vehicle (AAV) have the potential to significantly impact industries, particularly in commercial delivery. One notable example is Amazon Prime Air, which is currently under development. Prime Air aims to deliver goods from Amazon warehouses directly to customers (Amazon, 2022). To accomplish this, AAV require a reliable and efficient autonomy system.

One of the most critical challenges in designing an AAV system is the ability to sense and avoid (SAA) obstacles. While the airspace in which AAVs operate may be relatively sparse, there is still risk of encountering static obstacles or airborne objects such as birds or drones. In commercial applications, such encounters can have consequences not only for the AAV itself but also for the items it carries. Ensuring effective SAA capabilities is essential to mitigate these risks and safeguard both the AAV and the valuable cargo it transports.


Most SAA system of AAVs includes camera as their primary sensor. Cameras provide visual perception to the AAV, real-time, in the form of images. These images must be processed by a computer vision algorithm to identify and localize the obstacles in it so that the AAV can estimate their position and plan actions it needs to do to avoid them. There are other onboard sensing options such as LiDAR or radar, but cameras are more favored due to their lighter weight, cheaper price, and relatively lower energy consumption compared to active sensors.

Airborne objects present a particularly challenging problem in SAA as they can appear unexpectedly and approach rapidly from long distances due to their inherent need for speed in flight. For this reason, it is important to detect airborne objects while they are still far away. Unfortunately, their far distance cause them to appear very small on images. Figure 1.1 show an

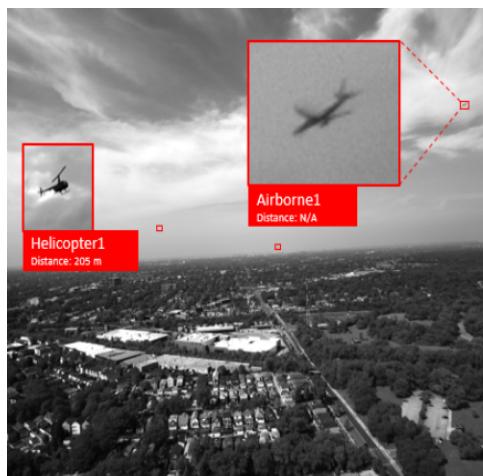

Source: “Airborne Object Tracking Dataset” (2021) under CDLA-Permissive 1.0

Figure 1.1: An example of airborne object dataset

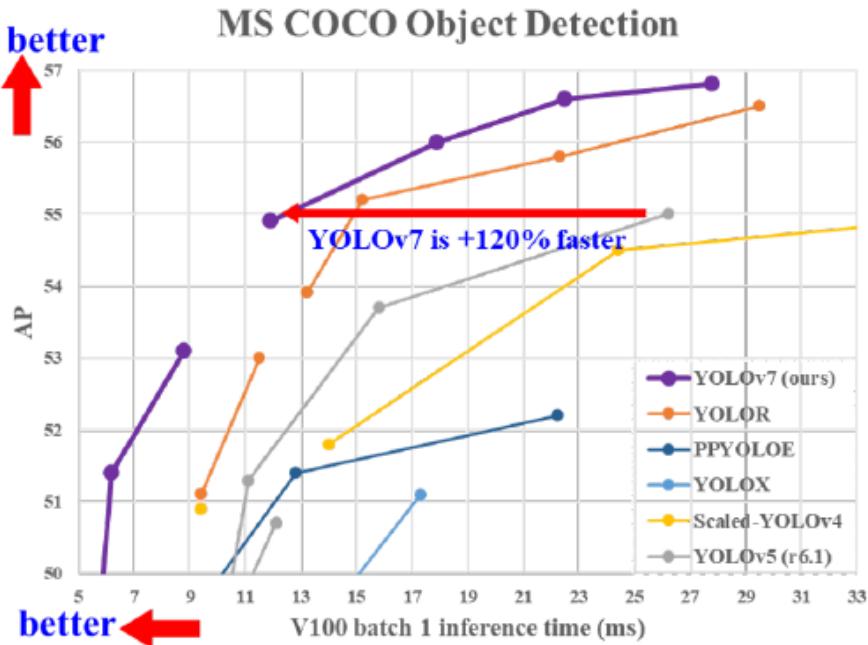

Source: C.-Y. Wang, Bochkovskiy, et al. (2022) with permission (see Appendix C)

Figure 1.2: YOLOv7 performance on COCO dataset compared to other object detectors.

example of how airborne objects appear on images. In “Airborne Object Tracking Challenge” (2021), the airborne objects can appear in the range of 4 to 1000 px on a  $2048 \times 2448$  px image, that is, around 0.00008 - 0.01 % of the image area.

For reasons listed above, the computer vision algorithm to be implemented to detect these airborne objects, must be able to detect small objects accurately. And not only that, it also must be able to do it in real-time. The fact that AAVs operating environments are outdoors, brings more trouble for the computer vision. Outdoor environment brings large complexity and additional variance to the image distribution, making it almost impossible to handcraft feature extractor for it. This is where non-handcrafted feature extractors come in handy, particularly the deep learning approaches. Deep learning models have shown incredible abilities in handling complex data. Given enough training data, a deep learning model can craft its own feature kernels that can extract the objects in an image, despite being subjected to complex outdoor environment. For this reason, deep learning models gained prominence in addressing these challenges.

Introducing YOLOv7, a state-of-the-art convolutional neural network based real-time object detector (C.-Y. Wang, Bochkovskiy, et al., 2022). At the time of the proposal for this research was made (November 2022), YOLOv7 outperform both in speed and accuracy of all known real-time object detectors with inference speed in the range of 5-160 FPS as seen on Figure 1.2. It also has the highest accuracy (56.8% AP) among object detectors with inference speed greater than 30 FPS on a V100 GPU. The capabilities of this cutting-edge architecture makes it well-suited for AAV computer vision system. However, all the performance metrics of YOLOv7 mentioned before are obtained by training the model using COCO 2017 dataset. A dataset which consists of general objects that people see in their daily life. COCO dataset is going to have very distinct distribution compared to airborne objects. As such, there would be a need for some modification to YOLOv7 so that it could detect airborne objects well.

The topic of this research is about modifying YOLOv7 with objective of optimizing it to detect small objects, which extends to airborne objects. We experimented with some modification to YOLOv7’s bag-of-freebies, bag-of-specials, and network architecture. Then we benchmarked the modified models against the “Airborne Object Tracking Dataset” (2021), and picked the model with the highest AP score that can perform inference in real-time.

## 1.2 Problem Statement

In this research, our primary focus will be on the modifications of YOLOv7 to enhance its ability in detecting airborne objects. Rather than aiming for the ultimate solution for detecting airborne objects, our objective is to explore potential modification to YOLOv7 that can improve its performance in small object detection. Therefore, the problem statement of this research is as follows:

What specific modifications can be implemented on YOLOv7 to optimize its abilities in detecting airborne objects?

## 1.3 Purpose

The purpose of this research is to identify and propose practical improvements to YOLOv7 that can improve its ability in detecting airborne objects. This research seeks to contribute to the improvement of YOLOv7 in the context of airborne object detection, ultimately leading to more reliable and efficient detection capabilities in relevant applications such as SAA systems.

## 1.4 Problem Scope

In this research, we want to formulate the scope of the problem such that the modifications applied on YOLOv7 would not lose its real-time detection ability and is still reasonably computable/trainable. Otherwise, we can just run a Solomonoff induction on airborne object data and call the result a modification of YOLOv7. Thus, we state the following scopes for the problem.

- YOLOv7 is used as the basis for modifications.
- The result of modification must be able to perform inference in real-time with consumer-level GPU.
- The modified YOLOv7 is subject to computational resource constraint. The modified model must be trainable within a reasonable duration using the computational resource available.

*[This page intentionally left blank]*

# CHAPTER II

## LITERATURE REVIEW

### 2.1 Theoretical Basis

#### 2.1.1 Object Detection Task

Object detection is a fundamental task in computer vision. It is a task that have 2 objective, localization and classification. Localization is about determining the spatial properties of an object in an image. E.g. by enclosing objects in bounding boxes, determining which part of the image is an object and which part is not. On the other hand, classification is about determining the class of objects. An object detection algorithm has to determine the label of an object whether they are an animal, human, necromancer, or something else in the set of classes.

To measure how well an object detection algorithm or model perform, computer vision researchers defined metrics to measure how fit a model prediction to an object and to measure how well the model perform across all objects. Example of those metrics are Intersection Over Union (IoU) and Mean Average Precision (mAP).

#### Intersection Over Union

IoU is a widely used metrics to determine how fit a predicted bounding box against the true bounding box. It is done by calculating the area of the intersection between the predicted and dividing it by the area of the union of those 2 boxes. This way, IoU is robust to objects of different sizes and aspect ratio.

Bounding box of an object can be large, small, wide, or tall. Since IoU consider the intersection of bounding boxes in relation to the union, IoU provides a normalized measure of the fitness of boxes, making it robust to the bounding boxes size. For example, if 2 boxes A and B intersect, there would be three possible cases, A fits B perfectly, A is inside B or vice versa, and some of A in B or vice versa as shown in Figure 2.1. When bounding box A fits B perfectly, the value of IoU would be 1 as the area of intersection is the same as the area of union. For the case where a bounding box is inside another, IoU can lower the score if the enclosed box's size is smaller compared to the enclosing box due to the normalization by the union area. For the case when the boxes partly intersect, the area of intersection and area of union would be suboptimal, leading to a lower IoU score. We can say that the intersection part of the IoU provide a score for the bounding boxes position similarities and the union provide score for size similarities.

To calculate the IoU of two bounding boxes A and B, the area of intersection and union must first be calculated. The following shows the process of calculating IoU.

- Calculate the area of intersection of A and B. Let  $(x_A, y_A)$  and  $(x_B, y_B)$  be coordinates of the center of the boxes A and B respectively, and let  $(w_A, h_A)$  and  $(w_B, h_B)$  be widths and heights of boxes A and B, as demonstrated in Figure 2.2.

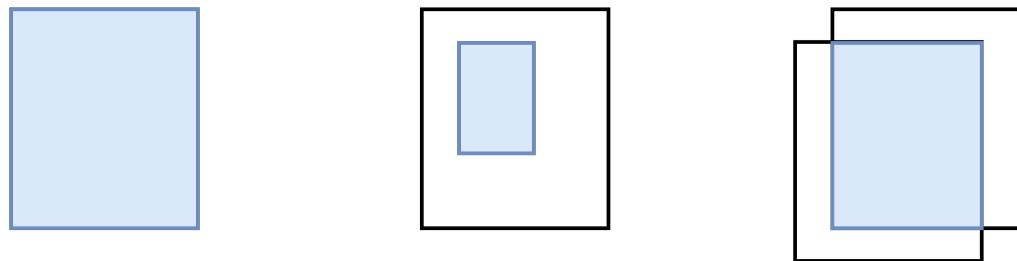


Figure 2.1: Three Cases of Bounding Boxes Intersection

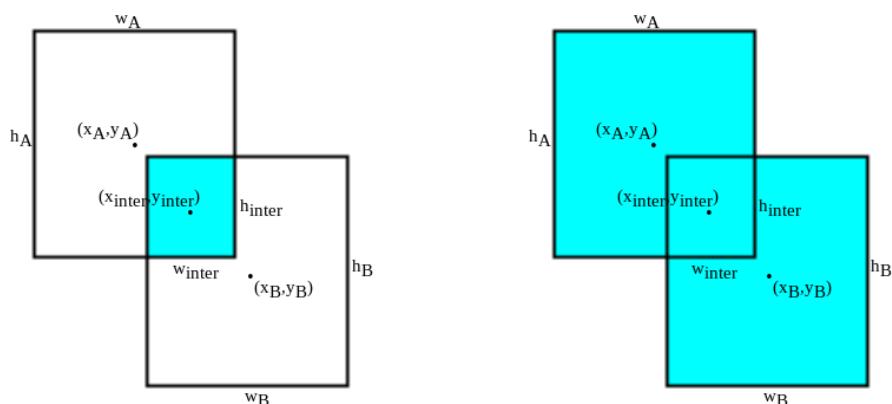


Figure 2.2: Intersection and Union of 2 Bounding Boxes

The calculation for the area of intersection can be done like this:

$$\begin{aligned}
x_{\text{inter}} &= \max(x_A, x_B) \\
y_{\text{inter}} &= \max(y_A, y_B) \\
w_{\text{inter}} &= \min(x_A + w_A, x_B + w_B) - x_{\text{inter}} \\
h_{\text{inter}} &= \min(y_A + h_A, y_B + h_B) - y_{\text{inter}} \\
\text{Area}_{\text{inter}} &= w_{\text{inter}} \times h_{\text{inter}}
\end{aligned}$$

- Calculate the area of union.

From set theory, we know that  $|A \cup B| = |A| + |B| - |A \cap B|$ . This equation also applies on calculating the area of union.

$$\begin{aligned}
\text{Area}_{\text{union}} &= \text{Area}_A + \text{Area}_B - \text{Area}_{\text{inter}} \\
\text{Area}_{\text{union}} &= w_A \times h_A + w_B \times h_B - \text{Area}_{\text{inter}}
\end{aligned}$$

- Finally, calculate IoU

$$IoU = \frac{\text{Area}_{\text{inter}}}{\text{Area}_{\text{union}}} \quad (2.1)$$

## Mean Average Precision

Average Precision (AP) is a popular metrics used to measure the capability of an object detection model for a given dataset. The main advantage of using AP are its ability to capture the precision recall tradeoff and its independence towards confidence threshold. AP has these 2 advantage as an effect of the way it is calculated.

Calculating AP is the same as calculating area under the curve (AUC) of precision and recall curve. Precision is defined as

$$P(\mathbb{S}_c, h, \tau, \epsilon) = \frac{\left| \{(\hat{B}, x) \in \mathbb{S} : \exists B \in h(x, \tau)_c, IoU(\hat{B}, B) > \epsilon\} \right|}{|\{B \in h(x, \tau)_c\}|} \quad (2.2)$$

Where  $h$  = hypothesis/model that predict bounding boxes

$\mathbb{S}_c$  = set of bounding boxes of class  $c$  in dataset paired with their respective image

$h(x, \tau)_c$  = bounding boxes predicted by  $h$  with class  $c$

$\tau$  = confidence threshold for  $h$

$\epsilon$  =  $IoU$  threshold for a positive prediction

$B$  = Bounding box

$x$  = image

and for recall, it is defined as

$$R(\mathbb{S}_c, h, \tau, \epsilon) = \frac{|\{(\hat{B}, x) \in \mathbb{S} : \exists B \in h(x, \tau)_c, IoU(\hat{B}, B) > \epsilon\}|}{|\mathbb{S}_c|} \quad (2.3)$$

Then we define the precision recall curve as a parametric function

$$PR(\tau) = (R(\mathbb{S}_c, h, \tau, \epsilon), P(\mathbb{S}, h, \tau, \epsilon)) \quad (2.4)$$

Using equation 2.4,  $PR$  points in Figure 2.3 can be generated using  $0 \leq \tau \leq 1$ . Before calculating the AP however, the curve in Figure 2.3 is usually interpolated using Equation 2.5, which relies on Equation 2.6 that transformed  $PR$  curve to a functional relation of R to P. The interpolated curve can be seen on 2.4

$$p_{inter}(r) = \max_{\bar{r} > r} p(\bar{r}) \quad (2.5)$$

$$\text{Where } p(\bar{r}) = \max \{p : \forall (r, p) \in \{PR(\tau) : 0 \leq \tau \leq 1\} \wedge r = \bar{r}\} \quad (2.6)$$

The AP, which is the area under the curve then can be calculated using the following integral:

$$AP = \int_0^1 p_{inter}(r) dr \quad (2.7)$$

When calculating AP, the  $IoU$  threshold for positive detection is usually predefined. As example, for AP@50, we set the  $\epsilon$  in Equation 2.2 and 2.3 to 50%. And for AP@75, the  $\epsilon$  is set to 75%.

The AP calculation so far only works for a single class. To have a multiclass metric, we use mAP which is calculated as the average AP across all classes in the dataset.

$$mAP@X = \frac{1}{|\text{classes}|} \sum_{c \in \text{classes}} AP_c @ X \quad (2.8)$$


## 2.1.2 YOLO Family Architecture

YOLO is an abbreviation of "You Only Look Once" which describes what kind of neural network YOLO is, a single stage object detector. It means that this architecture predicts regions and classes both at once. In contrast, two-stage detector predicts objects' regions first and then predicts their classes. Detecting objects in a single-stage manner is what gave YOLO architecture the ability to infer in real-time. This is possible due to how YOLO architecture was designed. YOLO architecture consist of 3 main part, the head, the neck, and the backbone.

### Backbone


The backbone is the network that extract features from the inputted image. Typically, the backbone is composed of deep neural network layers that progressively down sample the spatial dimensions of the input while increasing the number of learned features or meaningful abstraction of the data.

The implementation of backbone in YOLO usually varies from one version to another. As example, Redmon and Farhadi (2016)'s YOLOv2 implemented Darknet-19 network as back-

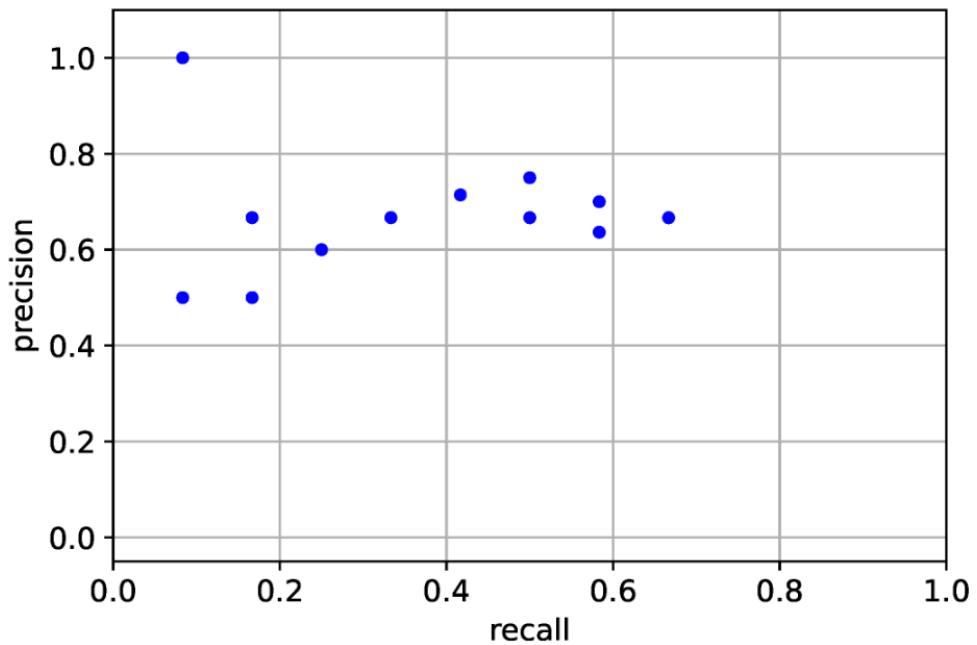

Source: Padilla et al. (2021) under CC BY 4.0

Figure 2.3: PR Points Generated by Varying  $\tau$

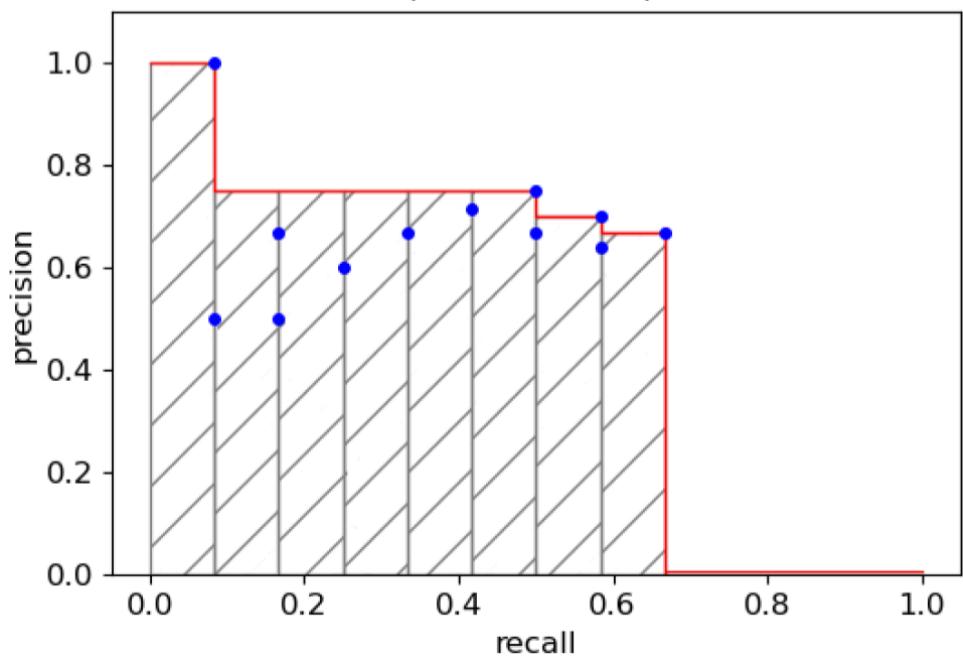

Source: Padilla et al. (2021) under CC BY 4.0

Figure 2.4: PR Curve Interpolated

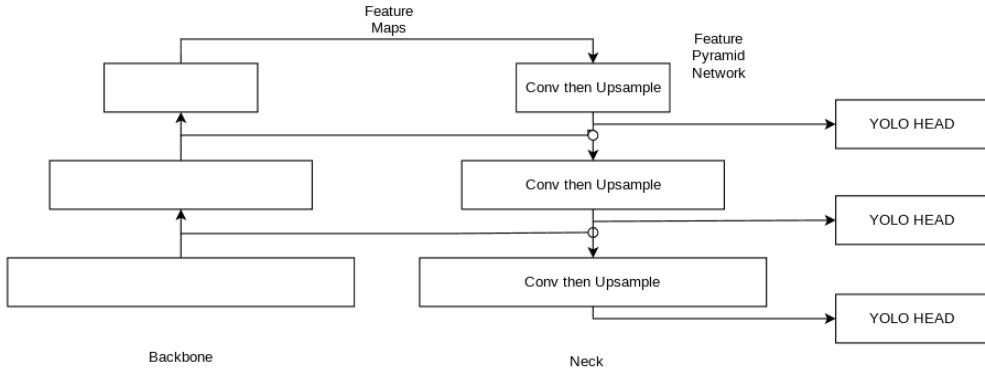


Figure 2.5: Feature Pyramid Network in YOLOv3

bone, Redmon and Farhadi (2018)’s YOLOv3 implemented Darknet-53, Bochkovskiy et al. (2020)’s YOLOv4 with their CSP-Darknet-53, and Zhang et al. (2021) with their non-CNN (Transformer) backbone. Each of these network has their own has their own advantages and disadvantage when it comes to accuracy, memory requirement, or latency.

## The Neck

The neck is the intermediate network between backbone and head and its main function of the neck is to enhance features extracted by the backbone. The specific implementation of neck for each YOLO architecture is different one to the other, however. One common approach is to combine feature maps from different prediction scales of the YOLO network.

In YOLOv3, Redmon and Farhadi (2018) introduced YOLO prediction in multiple scale. To utilize information across scales, YOLOv3 fuses features from multiple parts of the backbone before up sampling them as seen on Figure 2.5 by using Feature Pyramid Network (FPN) as its neck.

A further improvement was made by Bochkovskiy et al. (2020) with their YOLOv4 by introducing Path Aggregation Network (PANet) for the neck. With PANet, feature are fused back to higher scale by adding another FPN-like layer after the original FPN but with reverse direction. This results in a better integration of multiscale information and increased the object detection accuracy.

Overall, the neck’s role in YOLO architectures is to facilitate feature enhancement and fusion across different scales to improve detection performance.

## The Head and The Anchors

The head is where the object detection happens. Extracted and enhanced features of the image is fed to the head in multiple different scales. For each scale, the head will predict a box for each  $N_k \times N_k$  lattice point on feature map’s grid. In total, each layer will output a tensor with size  $N_k \times N_k \times [A_k \times (4 + 1 + C)]$  where  $N_k$  is the size of feature map grid at the  $k$ -th scale,  $A_k$  is the number of anchors for that scale, 4 is for the four offsets  $[t_x, t_y, t_w, t_h]$  (see Figure 2.6), 1 is for the objectness score for the grid, and  $C$  is for the number of classes it has to predict.

Most of YOLO family architecture head utilizes anchor boxes to assist bounding box prediction. This technique is used in Redmon and Farhadi (2016), Redmon and Farhadi (2018), Bochkovskiy et al. (2020), C.-Y. Wang et al. (2020), Jocher et al. (2022), C.-Y. Wang et al.

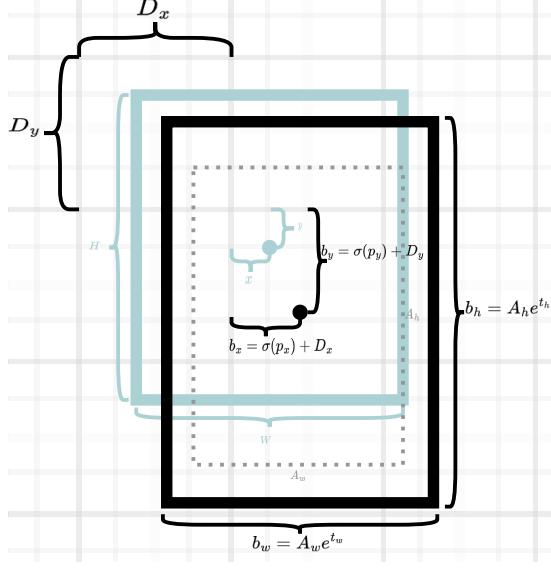


Figure 2.6: Head Layer Prediction for Anchor Box and Its Offsets from Lattice of The Feature Grid

(2021), and C.-Y. Wang, Bochkovskiy, et al. (2022). Instead of directly predicting the size and position of the bounding box, YOLO head predicts the offsets for each anchor boxes assigned to the head, then it utilizes the objectness score to pick which result of these anchor boxes to be used. Using anchor boxes allows the neural network to converge more quickly because it provides a prior knowledge of the dataset before training.

## Loss Function

The goal of a YOLO architecture is to (1) predict if an object exist or not, (2) predict the bounding box of such object, and (3) predict the class of the object. These 3 loss functions that correspond to those objectives are called objectness loss, box loss, and class loss respectively. To update the weights on training, the total loss is calculated as the weighted sum of those 3 losses. In original YOLO, the loss functions were defined like the following. For localization loss, it is described by equation 2.9.

$$L_{box} = \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{ij}^{obj} \left[ (x_i - \hat{x}_i)^2 + (y_i - \hat{y}_i)^2 + (\sqrt{w_i} - \sqrt{\hat{w}_i})^2 + (\sqrt{h_i} - \sqrt{\hat{h}_i})^2 \right] \quad (2.9)$$

Where  $S^2$  = the total number of grid cells in the output,

$B$  = the total number of anchor box per grid cells,

$$\mathbb{1}_{ij}^{obj} = \begin{cases} 1, & \text{if object present in grid} \\ 0, & \text{otherwise,} \end{cases}$$

$(x_i, y_i)$  = the predicted coordinates of the center of object  $i$

$(\hat{x}_i, \hat{y}_i)$  = the ground truth coordinates of the center of object  $i$

$(w_i, h_i)$  = the predicted width and height of object  $i$

$(\hat{w}_i, \hat{h}_i)$  = the ground truth width and height of object  $i$

For objectness loss, described by equation 2.10

$$L_{obj} = \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{ij}^{obj} (C_i - \hat{C}_i)^2 + \alpha \mathbb{1}_{ij}^{noobj} (C_i - \hat{C}_i)^2 \quad (2.10)$$

Where  $\mathbb{1}_i^{noobj} = \begin{cases} 1, & \text{if object assigned to anchor j} \\ 0, & \text{otherwise} \end{cases}$

$(C_i, \hat{C}_i)$  = predicted and ground truth confidence score for objectness of anchor

$\alpha$  = weight to punish false positives

And for class loss, described by 2.11

$$L_{class} = \sum_{i=0}^{S^2} \mathbb{1}_{ij} \sum_{c \in classes} (p_i(c) - \hat{p}_i(c))^2 \quad (2.11)$$

Where  $(p_i(c), \hat{p}_i(c))$  are the predicted and ground truth class probabilities for class  $c$  for object  $i$ .

The three losses combined to the final loss function in equation 2.12

$$L = \lambda_{box} L_{box} + \lambda_{obj} L_{obj} + \lambda_{class} L_{class} \quad (2.12)$$

Where  $\lambda_{box}$  = the weight for localization,

$\lambda_{obj}$  = weight for objectness

$\lambda_{class}$  = weight for class

These 3  $\lambda$ -s can be tuned to optimize the performance of a YOLO network.

### 2.1.3 YOLOv7

As said in section 1.1, YOLOv7 is the state-of-the-art real-time object detector. It was made by the authors of YOLOv4, and by the time it was published (July 2022), it surpassed all known real-time object detectors both in speed and accuracy. To achieve this, YOLOv7 implemented some new changes and addition to the neural network.

### Backbone

YOLOv7 implemented the Efficient Layer Aggregation Network (ELAN) and Extended-ELAN (E-ELAN) as the backbone of its network. ELAN is a convolutional neural network that was designed to extract features efficiently by controlling the shortest longest gradient path in the network (C.-Y. Wang, Liao, & Yeh, 2022). This choice of backbone allows YOLOv7 to perform prediction more accurately despite having fewer number of parameters.

Figure 2.7b shows how ELAN block in Figure 2.7a implemented in YOLOv7. First, the  $640 \times 640 \times 3$  input  $x$  propagate through 3 convolution layers, down-sampling the dimension to  $160 \times 160$  and increased the channels to 128. Then it encounter the first ELAN block. ELAN block did not change the dimension, but it doubled the number of channels, making the

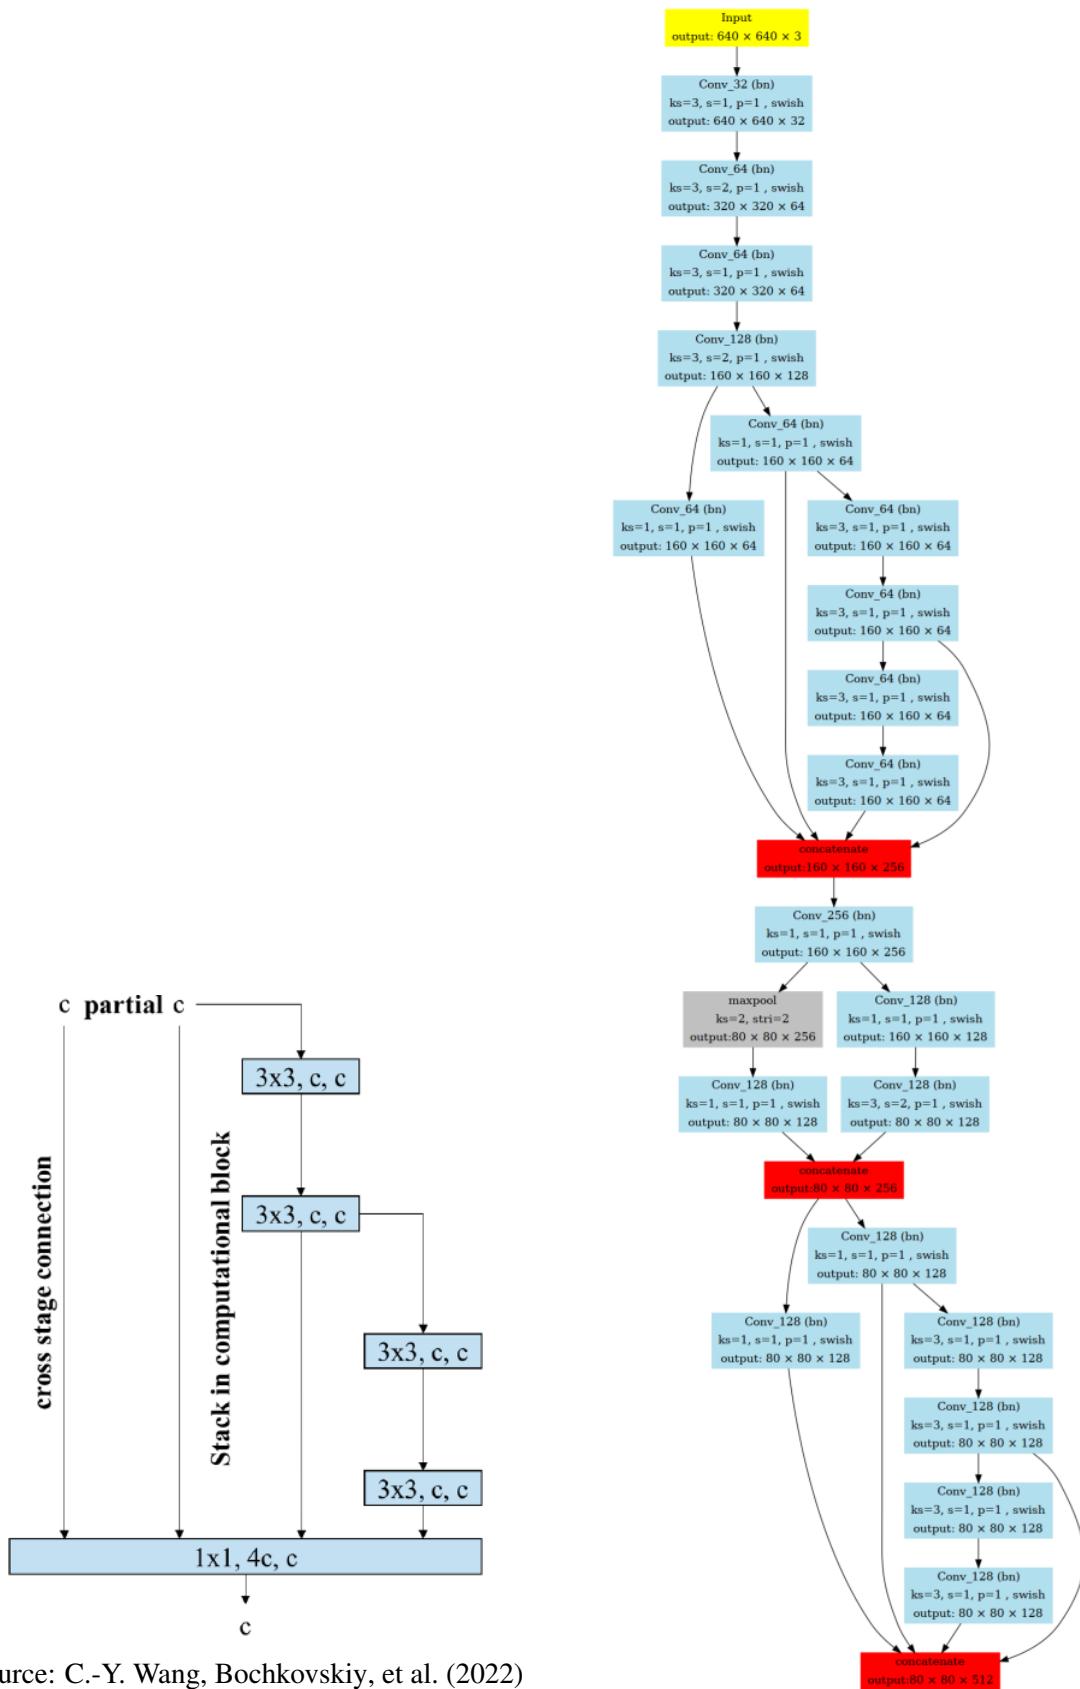


Figure 2.7: ELAN in YOLOv7

dimension of  $x$  to be  $160 \times 160 \times 256$ . Before propagating  $x$  to the next ELAN layer however,  $x$  is down-sampled to  $80 \times 80 \times 256$  using max-pooling and convolution layers. Prior to each ELAN layers in the backbone, the feature will be down-sampled in its width and height dimension by half.

## Label Assignment Strategy and Auxiliary Head

SimOTA, first introduced in YOLOX, is an algorithm to approximate Optimal Transport Assignment (OTA) in a faster way. Ge et al. (2021) introduced SimOTA in YOLOX because OTA was deemed too slow to compute as it was increasing the training time by 25%. YOLOv7 also implemented SimOTA for its dynamic label assigner.

YOLOv7 deep supervised its training process by attaching auxiliary heads to its neural network as seen on Figure 2.8a. These auxiliary heads are only used on training, on inference, they are removed from the neural network to improve latency, only the lead head is kept. There is a problem however with assigning labels to the auxiliary and lead heads. Most object detection networks that utilizes auxiliary heads have 2 independent label assigners, one for auxiliary heads and one for lead heads. YOLOv7 done things differently.

YOLOv7 proposed 2 way of assigning labels to auxiliary and lead heads. Lead head guided label assignment (Figure 2.8b) and coarse-to-fine lead head guided assignment (Figure 2.8c). For lead head guided label assignment, the assigner gives a copy of lead heads' label assignment to the auxiliary heads. For coarse-to-fine lead head guided assignment, the assigner works like lead head guided assigner but gives coarse label assignment to auxiliary head. Coarse label assignment is done by relaxing the positive sample constraints of the assigner.

Due to the relaxed constraints, coarse label assignment to auxiliary heads assigns more positive labels the auxiliary heads' grids. This way, the network will learn more to recall. On inference, this recall ability would be filtered by the lead head to produce accurate prediction. C.-Y. Wang, Bochkovskiy, et al. (2022) find that coarse-to-fine label assignment produces the greatest AP scores.

## Reparameterization


YOLOv7 utilized RepConv and YOLOR implicit layers in its network. In addition to that, YOLOv7 also uses Convolution-BatchNorm layer. These layers can be reparameterized after training to simplify the neural network, thereby reducing latency and memory usage but not hurting inference performance.

The reparameterization of these layers can be done after training by computing some mathematical simplification of some layer combination. These combinations of layers are YOLOR<sup>+</sup>–Convolution–YOLOR<sup>+</sup>, YOLOR<sup>\*</sup>–Convolution–YOLOR<sup>\*</sup>, and Convolution-BatchNorm.


For combination of layers YOLOR<sup>+</sup>–Convolution–YOLOR<sup>+</sup> layers, it can be reparameterized like the following.

$$\begin{aligned} x_{n+1} &= W(x_n + g_1(z_1)) + b + g_2(z_2) \\ &= W(x_n) + (W(g_1(z_1)) + b + g_2(z_2)) \\ &= W(x_n) + b' \end{aligned}$$


Observe that the reparameterization combined 3 layers into a single convolution layer with bias.

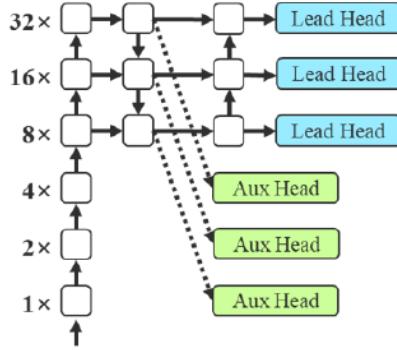

(a) Auxiliary heads attachment in YOLOv7

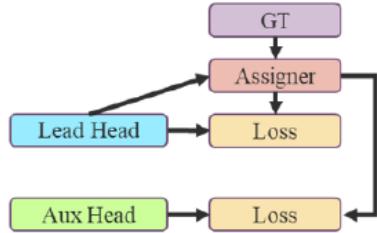

(b) Lead guided label assignment

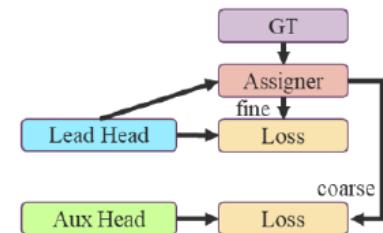

(c) Coarse-to-fine lead guided label assignment

Source: C.-Y. Wang, Bochkovskiy, et al. (2022) with permission (see Appendix C)

Figure 2.8: YOLOv7 Label Assignment Strategy with Auxiliary Heads

Then, For combination of YOLOR\*-Convolution–YOLOR\* layers:

$$\begin{aligned}
 x_{n+1} &= (W(g_1(z_1)x_n + b)g_2(z_2) \\
 &= g_2(z_2)g_1(z_1)W(x_n) + bg_2(z_2) \\
 &= W'(x_n) + b'
 \end{aligned}$$


And finally for Convolution-BatchNorm:

$$\begin{aligned}
 x_{n+1} &= ((W(x_n) + b) - m)/s \\
 &= (W(x_n) + (b - m))/s \\
 &= (W/s)(x_n) + (b - m)/s \\
 &= W'(x_n) + b'
 \end{aligned}$$

In summary, YOLOR<sup>+</sup>–Conv–YOLOR<sup>+</sup> will be replaced with the original convolutional layer  $W$  but with bias  $W(g_1(z_1)) + b + g_2(z_2)$ . YOLOR\*-Conv–YOLOR\* layers will be replaced with a convolutional  $g_2(z_2)g_1(z_1)W$  and bias  $bg_2(z_2)$ . And Conv–BatchNorm will be replaced with a convolutional  $W/s$  and bias  $(b - m)/s$ .

## 2.1.4 Anchor Recalculation

Anchor recalculation is a common method of introducing prior distribution of the dataset to an anchor-based object detection networks. Thus, recalculating anchor can help the neural network learn faster. Most of the time, anchors provided by pretrained YOLO weights are optimized for the common metric dataset such as COCO2017 or VOC2012. Therefore, recal-

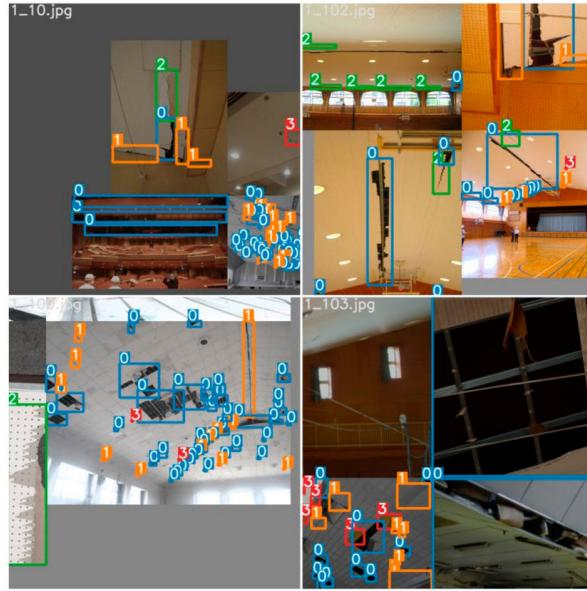

Source: P. Wang et al. (2022) under CC BY 4.0

Figure 2.9: Four example of mosaic augmentation

culating anchors in a specific dataset can improve the neural network ability.

There are multiple ways of recalculating anchors. Some of them can be performed before training or during training. Most of pre-training anchor recalculation method involves with clustering the anchors to the dataset. This is done by using clustering algorithm such as K-means, Gaussian Mixture, and many others. Recalculating anchor on training is a little more complex to do as it will involve some loss function or architectural change on the object detection neural network. Zhong et al. (2018) for example add additional layer on detection part of object detectors that is connected to anchor modifiers such that the anchors will also be updated during training. C.-Y. Wang et al. (2021) mentioned that the implicit multiplication layer of their network can be purposed for anchor refinement.

## 2.1.5 Mosaic Augmentation

Mosaic augmentation was introduced in Ultralytics' implementation of YOLOv3 (Jocher, 2020). This method involves randomly selecting four images from the dataset and tiling them together into a single augmented image, as shown in Figure 2.9. The resulting augmented image has a mosaic-like appearance, thus named "mosaic" augmentation.

Several works (C.-Y. Wang et al., 2019; Bochkovskiy et al., 2020; Jocher et al., 2022) have reported improvements in accuracy when utilizing mosaic augmentation in object detection tasks. By combining multiple images into one, mosaic augmentation provides the model with more diverse training samples, leading to enhanced performance in localizing and classifying objects.

## 2.2 Related Works

### 2.2.1 YOLOv4-tiny with added head

Aditya et al. (2022) used YOLOv4-tiny as their Autonomous Surface Vehicle (ASV) object detector due to the computational device constraint. To detect objects that were at least 30 meters away from the ASV, they applied a modification of YOLOv4-tiny, which was YOLOv4-tiny but with additional head layer. The original YOLOv4-tiny only had 2 head layers, thus was only predicting in 2 scales. An addition of head layer allows it to predict in 3 scales. Using this modification, the network was able to detect small object better (as seen on Figure 2.10) and raised the overall mAP score by 4% without significantly reducing latency.


### 2.2.2 exYOLO

exYOLO is a modification of YOLOv3 to detect small objects (Xiao, 2021). Xiao (2021) thought that the features of small objects in an image would disappear after series stage of down-sampling in the neural network. To solve this, exYOLO added a feature enhancement before feature-fusion in the neck to one of the feature scale as seen in Figure 2.11. This change made exYOLO produce a higher mAP score on VOC2007 compared to its baseline YOLOv3.

### 2.2.3 YOLO-Z

YOLO-Z is a derivative architecture of YOLOv5r5.0. This variant of YOLO modified the backbone, neck, and number of anchors of the original YOLOv5 to enhance its capability of detecting small objects (Benjumea et al., 2021). These changes are backbone change from YOLOv5r5.0 to a down-scaled DenseNet, neck change from FPN to biFPN on some YOLO-Z scales, and increasing the number of anchors used at each scale. These changes successfully improve the small object detection capability as seen on figure 2.12.

YOLO-Z was aimed to be used in autonomous racing car. In this high speed environment, early detection of obstacle is crucial to plan for action. For that reason, the autonomous racing car must detect the cone-shaped obstacles that are far away from it. Since objects that are far away appear small on image captured by camera, YOLO-Z was designed with purpose of small object detection.

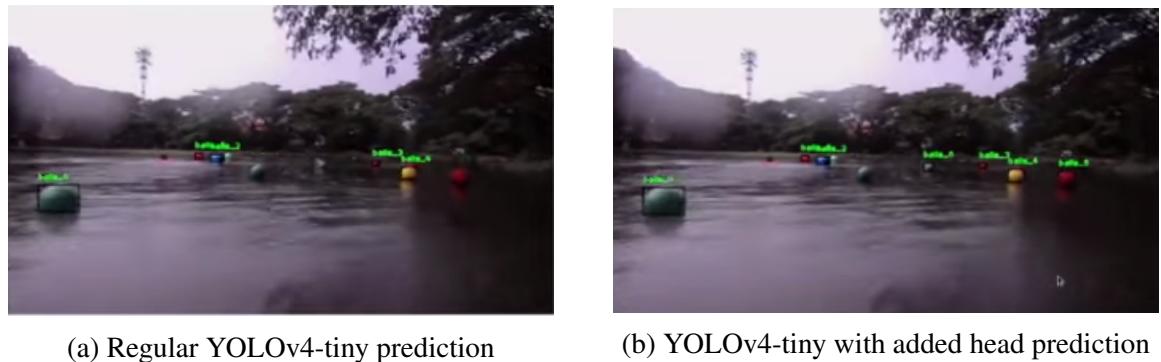


(a) Regular YOLOv4-tiny prediction

(b) YOLOv4-tiny with added head prediction


Source: Aditya et al. (2022)

Figure 2.10: Comparison of regular YOLOv4-tiny and YOLOv4-tiny with added head

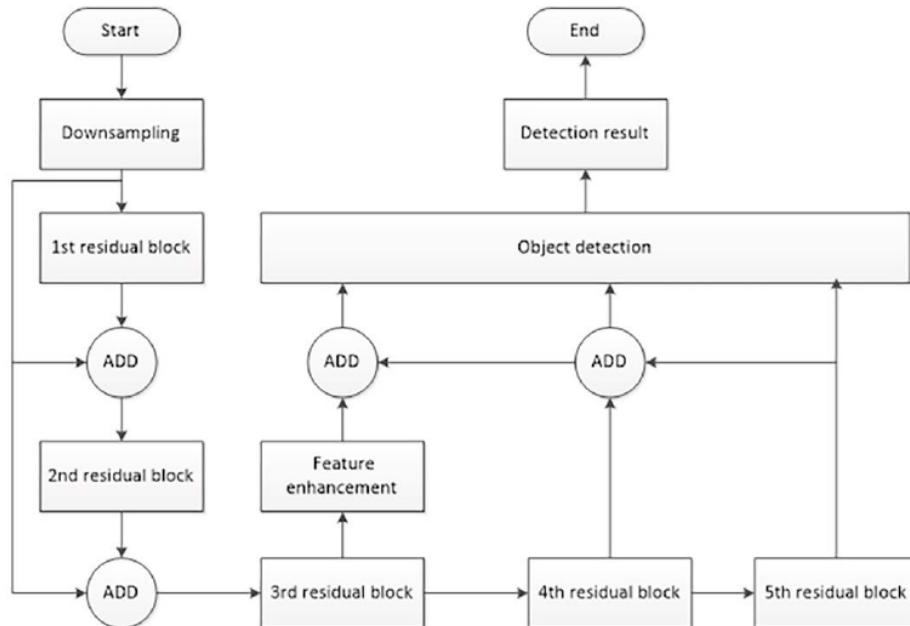

Source: Xiao (2021) under CC BY-NC-ND 4.0 (see Appendix C)

Figure 2.11: Architecture of exYOLO

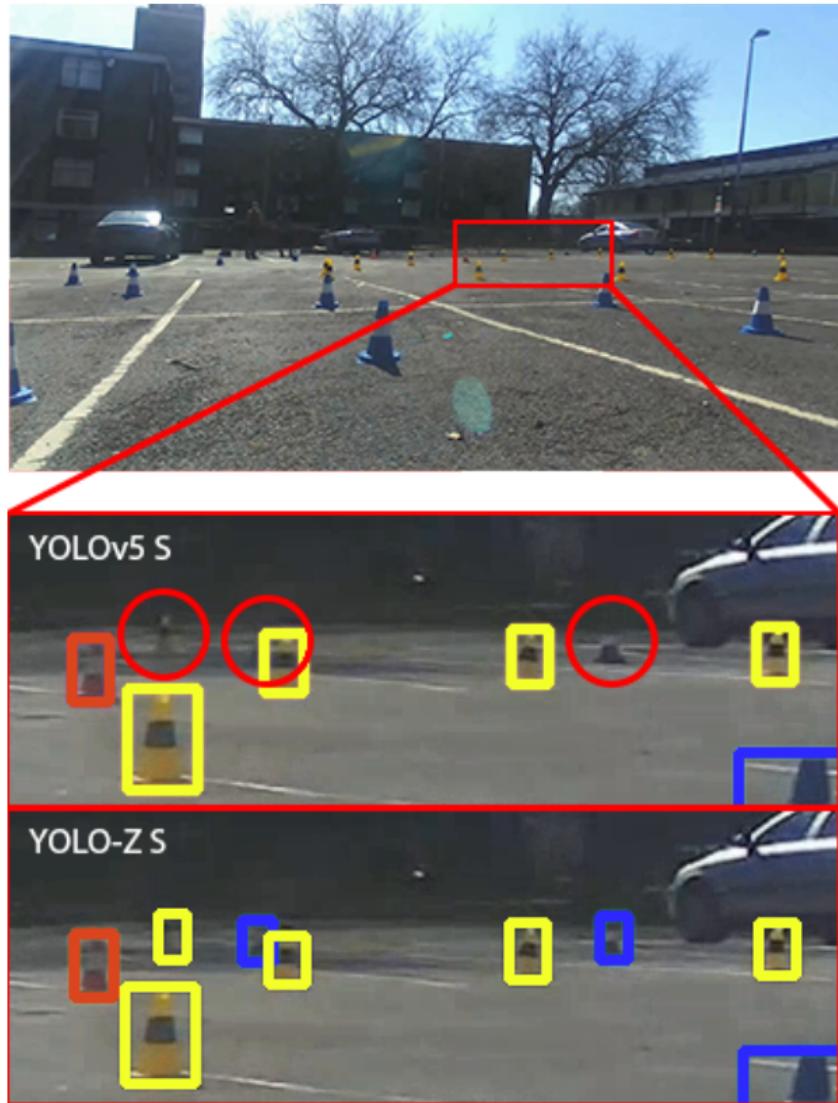

Source: Benjumea et al. (2021) with permission (see Appendix C)

Figure 2.12: Small objects in the image. Comparison of YOLOZ-S and YOLOv5-S. YOLOv5-S was not able to detect the circled objects.

*[This page intentionally left blank]*

# CHAPTER III

## METHODS

### 3.1 Model Searching Method

To find the best model for detecting small objects, trial and error will be performed by introducing modifications to YOLOv7. These modifications can include adding or changing the architecture, bag-of-specials, or bag-of-freebies. These modifications will be tested both independently and in combination with others to evaluate their impact on the model's performance.

The best model will be selected based on *mAP@50* metric. This metric was chosen instead of *mAP@[50 : 95]* because we don't expect for the model to be able to predict a tightly fit bounding boxes for small object and consider a loose 50% coverage IoU is sufficient.

The model searching method consist of six steps that need to be executed. These steps are dataset preparation, develop training system, create modification model configuration, training the model, analysis, and model selection. Figure 3.1 shows the order these steps will be executed.

To conduct this research, we first have to prepare the dataset. First, the dataset will be downloaded from “Airborne Object Tracking Dataset” (2021). Then, the labels of the dataset will be converted to darknet or COCO format. And finally, the dataset will be sampled into training set, validation set, and test set. The sampling will be done in a way that balances the number classes in each set so that there will be no dominating class during training.

The next thing to do is to develop a training system. The purpose of this system is to make the training process easily conducted and monitored. This system will include features such as train fail notification, train queuing, and overheating alert.

Moving on to the next, we have model configuration creation. Here we will create a model configuration file based on the modification that we want to try. The modification configurations will be made according to the modification candidates listed in section 3.2.

The next step is to train the model. The model configurations that was made in previous step will be built and trained from scratch (no pre-trained weights). In this step, the weights of


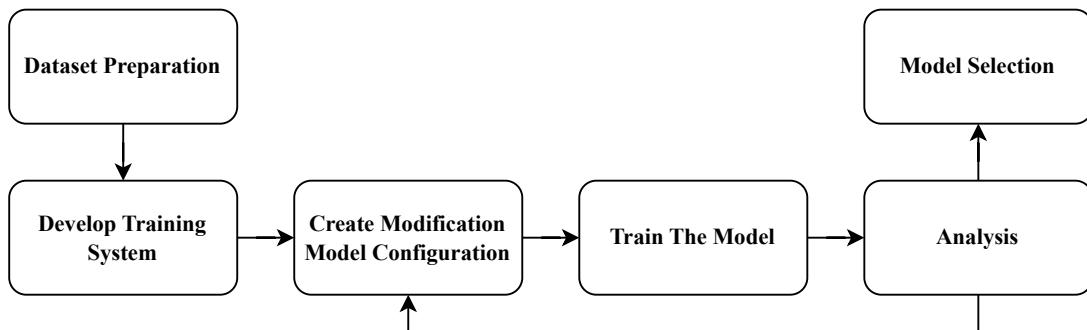


Figure 3.1: Search Steps

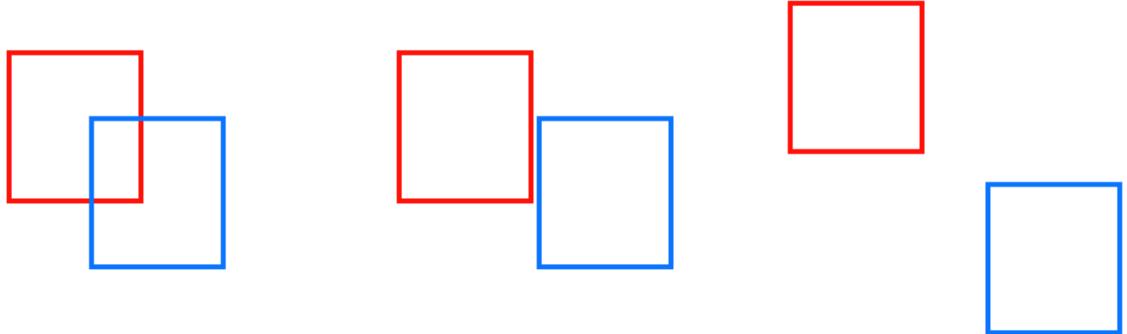

(a)  $IoU > 0$  when 2 boxes intersect

(b)  $IoU = 0$  when 2 boxes does not intersect

(c)  $IoU = 0$  when 2 boxes does not intersect and far away

Figure 3.2: Cause of IoU vanishing gradient

the neural network, training history, and performance metrics will be generated for analysis.

In the analysis step, we will analyze the performance of the modified YOLOv7. This step is done to validate the result and to find other candidate of modification that might work. If such modification candidate was found, we will go back to create the model configuration, and then train the modification. This iterative process allows for continuous refinement and enhancement of the modifications capabilities for detecting small objects.

Finally, in the last step we will select the best model. We will select the model with the best performance among the modified YOLOv7 models. The model selection will be done based on  $mAP@50$  metric, with constraint in inference latency. The model that qualify for selection must be able to perform inference with speed of atleast 10 FPS in a consumer GPU Nvidia RTX 2080Ti.

## 3.2 Modification Candidates

### 3.2.1 Mosaic Augmentation

As discussed in section 2.1.5, mosaic augmentation was able to increase the detection accuracy of small objects on many object detection neural networks. For this reason, we will experiment by training YOLOv7 with and without mosaic augmentation.

### 3.2.2 Pre-training Anchor Recalculation

In the implementation code of YOLOv7, the anchors provided was calculated based on COCO2017 dataset. We assume that the dataset distribution of airborne objects to be greatly different from COCO2017. As such, the anchors must be recalculated for better learning. This recalculation will be conducted using k-means algorithm. One problem however is that k-means might fail to cluster the dataset into the amount of anchors that we needed. To tackle this, we might have to cluster it in logarithmic coordinates.

### 3.2.3 Replacing Localization Loss to Extended IoU

Extended-IoU (EIoU) is a modification of IoU that are used in neural networks to tackle the problem of vanishing gradient (Peng & Yu, 2021). IoU are known to cause vanishing gradient problem due to its behavior when two bounding boxes are not intersecting. When 2 boxes  $A$  and

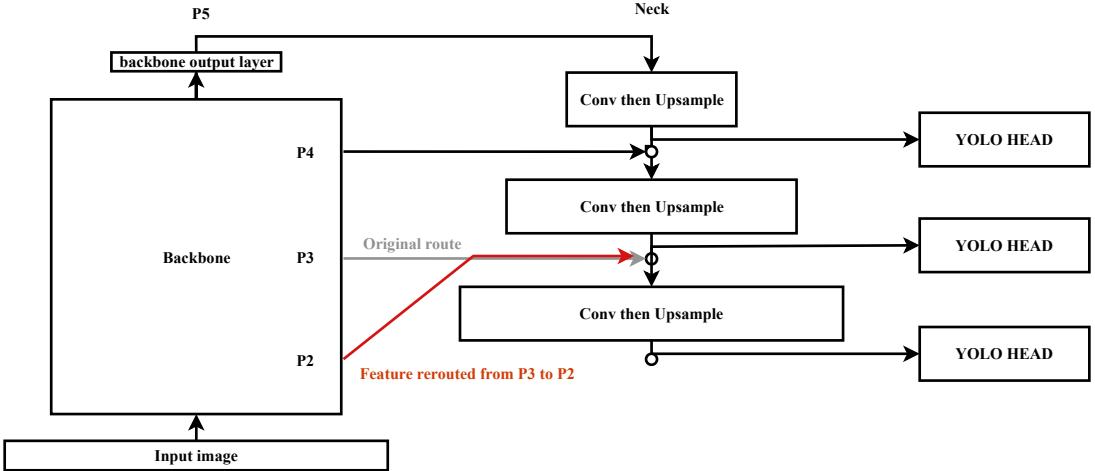


Figure 3.3: Rerouting Neck Connection to Earlier Stage

$B$  are not intersecting, the area of intersection ( $A \cap B$ ) would always be 0. This value doesn't give any information whether the boxes are far apart (Figure 3.2c) or near but not intersecting (Figure 3.2b). To solve this, loss involving  $IoU$  are usually paired with some regularization terms. For example Rezatofighi et al. (2019) and Zheng et al. (2019) proposed regularized  $IoUs$  named  $GIoU$ ,  $DIoU$ , and  $CIoU$ .

YOLOv7 itself is using  $CIoU$  for its localization loss.  $CIoU$  is just regular  $IoU$  that is paired with distance and box aspect ratio regularization terms. The problem of these kinds of regularized  $IoU$  is that when the boxes intersect, it does not behave like  $IoU$  anymore.  $GIoU$ ,  $DIoU$  and  $CIoU$  have residue of their regularization when the boxes intersect. Unfortunately, most metrics used to evaluate object detection algorithms depend on  $IoU$  (e.g.  $mAP$ ). For this reason Peng and Yu (2021) designed EIoU. The main appeal of EIoU is that it behaves exactly like  $IoU$  when the boxes intersect and gives non-positive value when the boxes do not intersect. By behaving exactly like  $IoU$ , it is hoped that the model would perform better on the  $IoU$ -based metrics.

### 3.2.4 Utilizing Earlier Feature Map Stage

In a deep neural network, the extracted feature/abstraction of the data become more prominent as the input data passes through deeper layers. However, so are the loss of information. For small object detection, every information in an image is crucial. There is a possibility that the features of small objects are lost as the data propagates through the network.

If we view it in a data path network design perspective, the greater the length of the path from input to output, the more information will be lost. Therefore, we propose to reroute the original connection from backbone to the neck to an earlier stage of inference. For example, YOLOv7 takes feature maps from P3, P4, and P5 scales of the backbone, we can reroute the connection from P3 to P2 as shown in Figure 3.3. The data path from input image to head routed to P2 is shorter than with P3.

### 3.2.5 Additional YOLO Head

An additional YOLO head means an extra stage of detection. With more stage of detection, the large variance of the objects in the dataset can be learned. This is especially good for

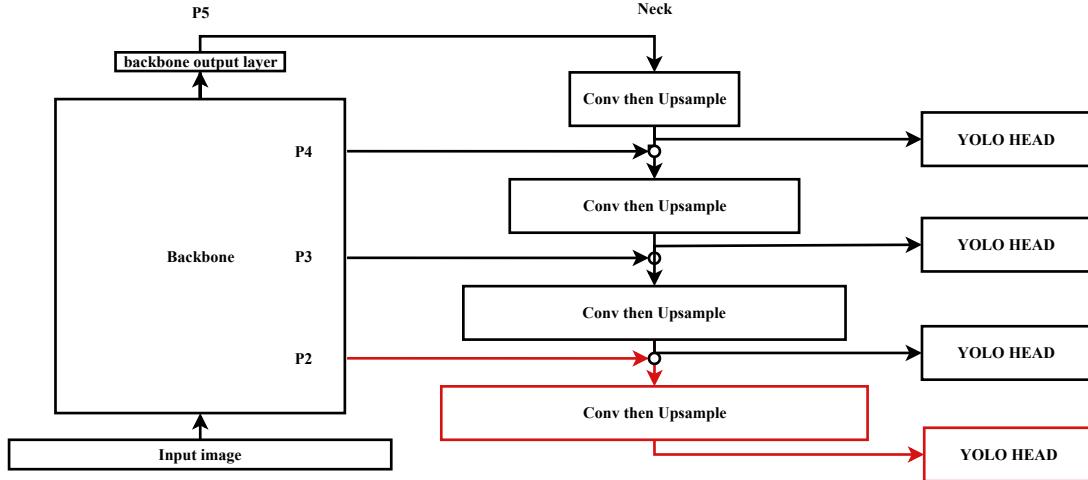


Figure 3.4: Adding an Extra Head Layer

“Airborne Object Tracking Dataset” (2021) where the area of the bounding boxes in the dataset can be orders of magnitude apart as discussed in section 3.5.

### 3.2.6 Replace YOLO Head to Decoupled Anchor-free Head


YOLOv6 and YOLOX used a different kind of head layer compared to usual YOLO (Ge et al., 2021; Li et al., 2022). In mainstream YOLO, prediction for bounding box and classes are both calculated on the same layer. With decoupled anchor-free head, the layers are separated for class prediction and bounding box prediction, and bounding box prediction are done using 4 value without anchor as seen on Figure 3.5. Using decoupled anchor-free head gives us 2 advantages. 1) Reducing the amount of design parameters as we don't have to introduce anchor boxes to the model. 2) Reducing the complexity of interpreting prediction result. Advantage (1) is especially enticing. There is a possibility of us introducing bad priors to the neural network by poorly clustering anchor boxes. By having a model that less dependent on prior, we can reduce such possibility.

A thing to consider when applying decoupled anchor-free head to YOLOv7 is the label assigner. YOLOv7 and YOLOX uses SimOTA as its default label assigner. However, Li et al. (2022) YOLOv6 uses Task-aligned Assigner (TAL) for its label assigner. They reported that TAL performs better than SimOTA. Therefore, in applying decoupled anchor-free head, it might be better to use TAL as label assigner.

### 3.2.7 Partitioning Image

Partitioning the image has the potential to improve the accuracy of small object detection. By partitioning images into multiple smaller images like shown in Figure 3.6, the down scaling factor of image to neural network input size is reduced, thereby reducing the loss of information. This approach allows the network to retain finer details and preserve the integrity of small objects, ultimately leading to more accurate detection results.

One challenge associated with partitioning image is the increase in inference latency. When an image is partitioned into multiple sections, the neural network needs to perform separate detections on each partition. As a result, the total inference time is multiplied by the number of partitions. For instance, if we divide an image into four parts, the network will have

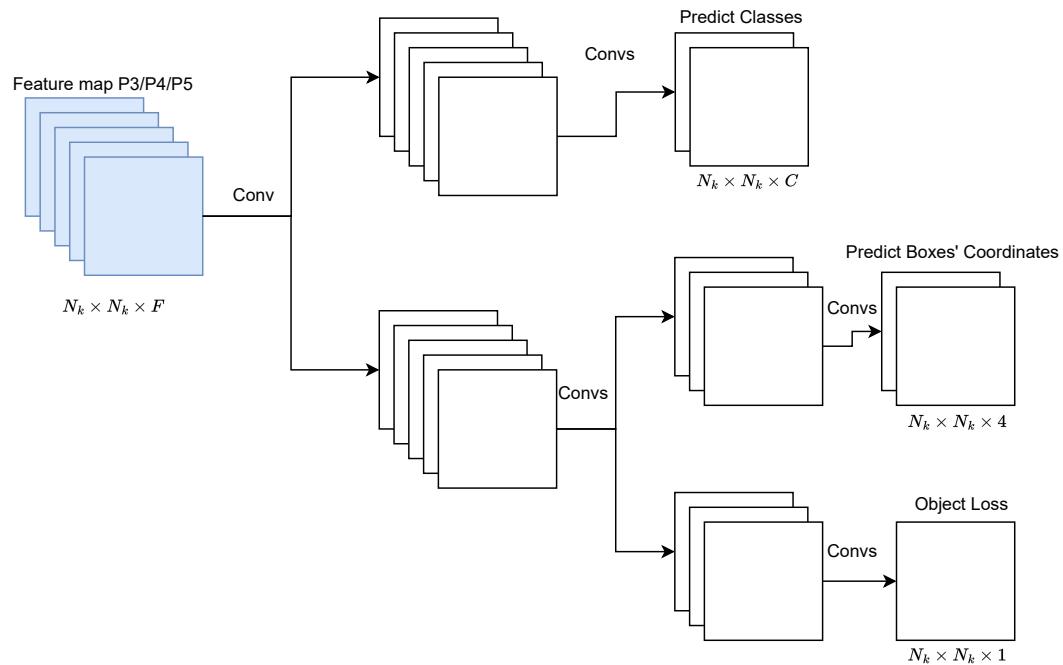

Prediction for Classes and Boxes are decoupled unlike original YOLO head

Figure 3.5: Decoupled Anchor-free Head



Figure 3.6: An Image Partitioned to 4 Images

to carry out four separate detections, leading to a significant increase in latency. Therefore, it is important to find the correct balance between the number of partition, and network input size.

### 3.3 Computational Resource

To conduct this research, we will be using a computer with the following specification:

• CPU	Intel® Core™ i5-9400F CPU @ 2.90GHz
• GPU	Nvidia Geforce RTX 2080 Ti
Memory	11 GB
CUDA Compute Capability	7.5
• RAM	12 GB
• Hard Drive Available Space	1.3 TB
• Operating System	Ubuntu 20.04
• CUDA Toolkit Version	11.7
• PyTorch Version	1.13.1

### 3.4 Pilot Test

To ensure the reliability of the computational resource, and to find the resource-induced constraint, we performed A pilot test. In this pilot test, we trained several YOLOv7 models with varying input sizes on 400 images from dummy dataset for 300 epochs. The dummy dataset have the same dimension as the “Airborne Object Tracking Dataset” (2021). The results are presented in Table 3.1.

From Table 3.1, we want to pick a baseline model to apply our modification. Since we want to persist the features of the  $2048 \times 2448$  px images as much as possible, we want to pick a model that has the largest input size but still able to give enough for some changes in architecture. For this reason, we picked YOLOv7 (entry number 3) with input size 1600 and batch size 1 as the baseline. This model can be trained in a reasonable time (20 hours) and enough spare room in the VRAM for architecture modifications.


Table 3.1: Pilot Test Training

No	Model	Input Size	Training Time (300 epochs)	VRAM Usage	Average GPU Temperature
0	YOLOv7	640	4.0h	4.5GB	82
1	YOLOv7 batch-size=2	640	2.5h	6.5GB	82
2	YOLOv7	960	4.7h	6.5GB	84
3	YOLOv7	1600	20h	9.0GB	84
3	YOLOv7 batch-size=2	1600	20h	Out of Memory	85
4	YOLOv7	2000	N/A	Out of Memory	N/A
5	YOLOv7-w6	1600	N/A	10GB	85
6	YOLOv7-d6	1600	N/A	Out of Memory	N/A
7	YOLOv7-e6	1600	N/A	Out of Memory	N/A
8	YOLOv7-e6e	1600	N/A	Out of Memory	N/A

## 3.5 Dataset Preparation

### 3.5.1 Dataset Source

Dataset containing annotated images of airborne objects can be obtained from “Airborne Object Tracking Dataset” (2021) that was hosted in an AWS S3 Bucket. The dataset consist of several Unmanned Aerial Vehicle (UAV) flights’ frame-by-frame camera capture. The dataset is structured in the following manner:

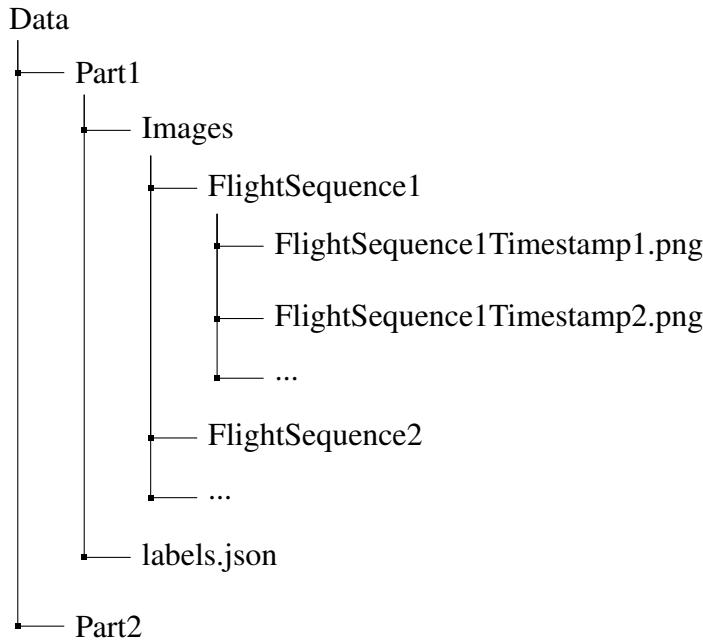

And each labels JSON file, `labels.json` on each part of the data, is structured like the following:

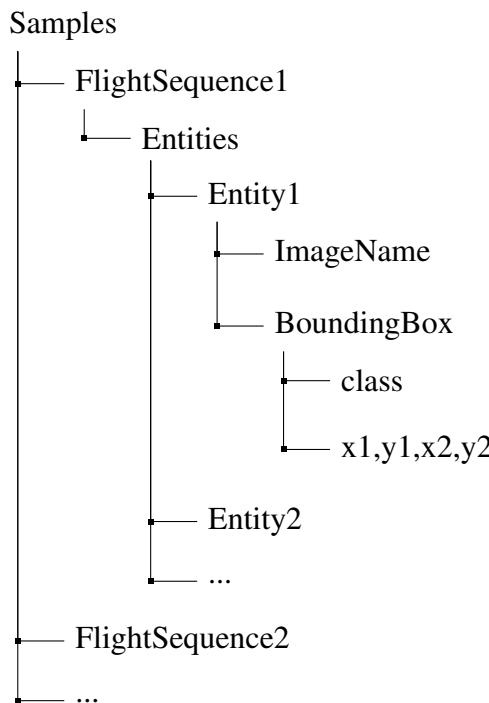


Table 3.2: Original Dataset Splits

Splits	Size (TB)	UAV Flight Sequences	Total Images	Total Labels
Training	11,3	4154	4975765	2891891
Validation + Test	2.1	789	943852	496075
Total	13,4	4943	5919617	3387966

Table 3.3: Dataset Objects' Classes Distribution

Splits	Total Objects	Airplane	Helicopter	Bird	Other 4 Classes
Training	2,89 M	0,79 M	1,22 M	0,33 M	0,54 M
Validation + Test	0,50 M	0,13 M	0,17 M	0,06 M	0,14 M
Total	3,39 M	0,92 M	1,39 M	0,39 M	0,69 M

Notice that the labels are structured in an entity based manner. This made the label conversion process more complex. Handling this labelling structure will be discussed more in the next section.

## Dataset Statistics

There are 7 classes in the dataset, but there are 3 dominating classes. The size of the dataset and its class distribution can be seen on Table 3.2 and 3.3. In total, the dataset is a 13.4 TB images of 3.39 million objects.

If we look at the area (in  $px$ ) distribution of the objects' bounding boxes, we will find the histogram in Figure 3.7. Take note that in the figure, the x-axis is using in logarithmic scale, which means the true data is very right skewed. The median of the areas is  $314px$ , while the 5th and 95th percentile are  $36px$  and  $5061px$ , three orders of magnitude difference.

The widths and heights of the objects themselves are distributed in a way shown in Figure 3.8: The figure uses logarithmic scale for x and y, and the dashed lines represent the median for x and y axis. Meanwhile, The distribution of objects position in the camera can be seen on Figure 3.9. We can see that most of the objects are around the center of the image.

### 3.5.2 Dataset Sampling

#### Sampling Distribution

As seen on section 3.5.1, The size of the dataset is massive. For this reason, we only downloaded the planned encounters from the AWS S3 Bucket which in total amounted to 1.1 TB. As this number is still too large due to the limitation of computational resource, we will only sample some of them for training and testing. We will sample in total 700 images from the dataset with splits as shown in Table 3.4.

#### Sampling and Label Conversion Procedure

Sampling the dataset was not straightforward. Due to how the “Airborne Object Tracking Dataset” (2021) files and labels was structured, we had to make a sampling and converting

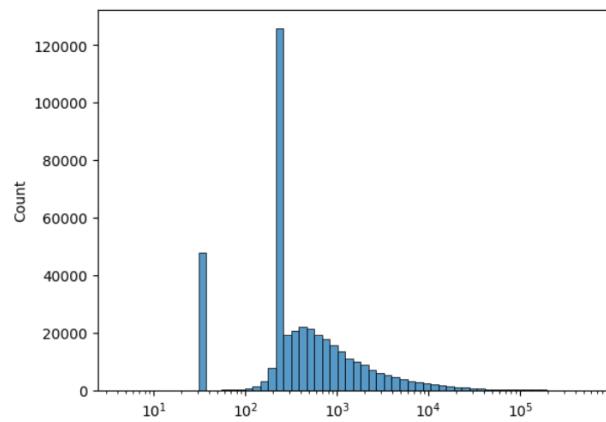


Figure 3.7: Distribution of Bounding Boxes' Area


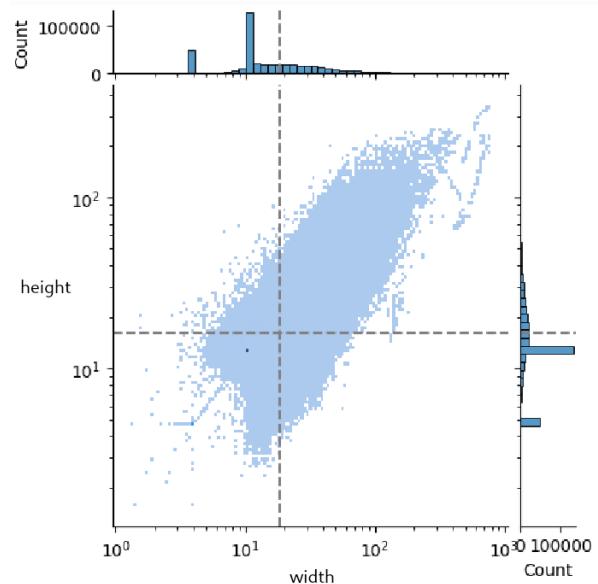


Figure 3.8: Distribution of Bounding Boxes' Widths and Heights

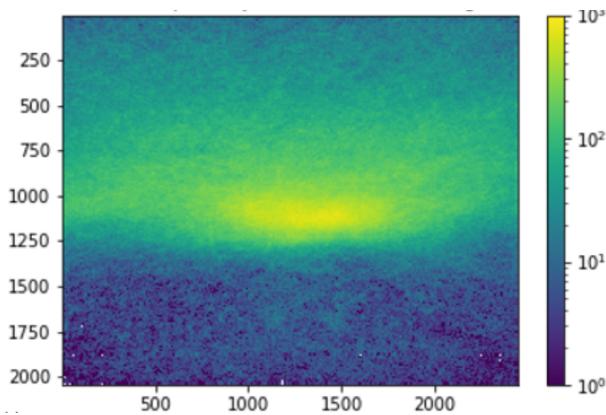

Source: “Airborne Object Tracking Dataset” (2021) under CDLA-Permissive 1.0

Figure 3.9: Distribution of Objects' Position

Table 3.4: Dataset Sampling Distribution

Splits	Total Images	Classes Percentage				
		Airplane	Helicopter	Bird	Drone	Negative
Training	400	23.75%	23.75%	23.75%	23.75%	5%
Validation	100	20%	20%	20%	20%	20%
Test	200	20%	20%	20%	20%	20%

procedure like the following:

1. Open all `labels.json` file and load all entities into a single list called `entities`
2. Let `Img2Boxes` be a dictionary with image names as key and list of bounding boxes in the image as value.
3. Let `Cls2Img` be a dictionary with 4 class names as key (airplane, bird, etc) and set of image name that contain object of those classes as the value.
4. Populate `Img2Boxes` and `Cls2Img` in the following manner:

---

```

1  For entity in entities:
2      Img2Boxes[entity.ImageName].append(entity.BoundingBox)
3      Cls2Img[entity.BoundingBox.class].append(entity.ImageName)

```

---

5. Calculate the total image needed for each class according to Table 3.4.  
e.g. Total image needed for airplane class is  $\frac{400 \times 23.75 + 100 \times 20 + 200 \times 20}{100}$ .

6. Distribute the images to train, valid and test.

---

```

1  For class in list_of_classes:
2      Images[class] = Cls2Img[class].random_choice(TotalImageNeeded[←
            class])
3
4  For class in list_of_classes[-1]: // except negative sample
5      addtotrain = images[class][:23.75/63.75*TotalImageNeeded[class]]
6      images[class] = images[class][23.75/63.75*TotalImageNeeded[class←
            :]]
7      train.append(addtotrain)
8
9  do the same to valid and test
10 process the negative sample independently

```

---

7. Convert `train`, `valid`, `test` to darknet format.

---

```

1  For img in train:
2      label = []
3      For boxes in Img2Boxes[img]
4          // to_darknet converts class xyxy to class x y w h normalized
5          label.append(to_darknet(boxes.BoundingBox))
6
7      copy(img, train_folder+img)

```

---

```
8     write(label, train_folder+img.with_suffix('.txt'))  
9  
10    repeat this for valid and test
```

---

*[This page intentionally left blank]*

# CHAPTER IV

## EXPERIMENTS

### 4.1 Baseline Performance

For comparison purposes, we first measure the baseline performance of YOLOv7 with all modification candidates from section 3.2 stripped. We call this model as **YOLOv7-plain**. After 300 epochs of training with batch-size 1 like in the experiment setup, we found that this model was unable to detect anything on the test set (a valid detection is detection with  $IoU > 0.5$  to groundtruth).

### 4.2 Mosaic Augmentation and Anchor Recalculation

In this section, we present the effect of mosaic augmentation and anchor recalulation on the *mAP@50* score when applied independently and combinatively. For comparison purposes, we assigned names the models as **YOLOv7-M**, **YOLOv7-AR**, and **YOLOv7-MAR**. These names correspond to **YOLOv7-plain** with mosaic augmentation, **YOLOv7-plain** with anchor recalulation, and **YOLOv7-plain** with both mosaic augmentation and anchor recalulation, respectively.

The process of applying mosaic augmentation to the dataset is pretty straightforward as YOLOv7's implementation code already provide the mosaic augmentation tool. A mosaic augmentation result example can be seen in Figure 4.1.

Anchor recalulation is done by clustering the training data's widths and heights to 9 centroid using k-means algorithm. However, due to the skewed distribution of the dataset, regular k-means (with  $L^2$  Distance) actually failed to form 9 clusters. To fix this, we used a distance function

$$L = \sqrt{\ln^2 \frac{w_1}{w_2} + \ln^2 \frac{h_1}{h_2}} \quad (4.1)$$

Distance function in equation 4.1 was actually an  $L^2$  distance but with log-transformed space. With this function, k-means was finally able to cluster the data into 9 centroids. These centroids are used by the head layers as anchors. Each head uses 3. The comparison of the original anchor and recalculated anchor can be seen in Table 4.1 and Figure 4.2.

If we observe the distribution of anchors before and after recalulation in Figure 4.2, we can see that indeed the recalculated anchors cover more of the dataset than the original. 8 out of 9 of the original anchors are placed in the first quadrant of the median axis. It means that

Table 4.1: Anchor Points Before and After Recalculation

Head	Original Anchors	Recalculated Anchors
1	[12,16], [19,36], [40,28]	[4,4], [14,5], [11,11]
2	[36,75], [76,55], [72,146]	[27,8], [18,17], [41,14]
3	[142,110], [192,243], [459,401]	[43,32], [86,27], [149,70]

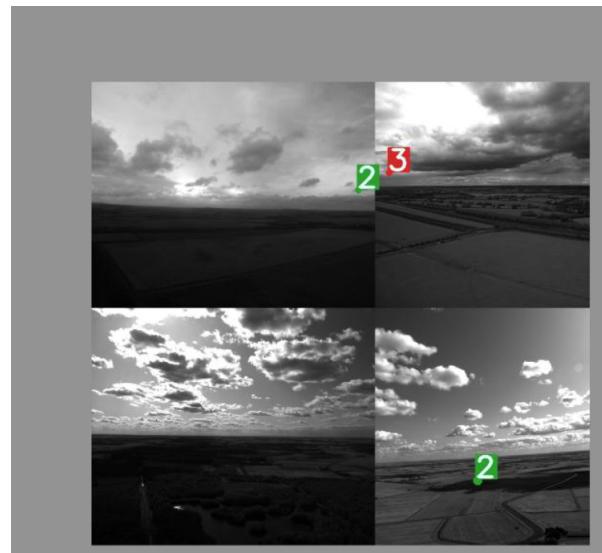


Figure 4.1: An example of mosaic augmented image

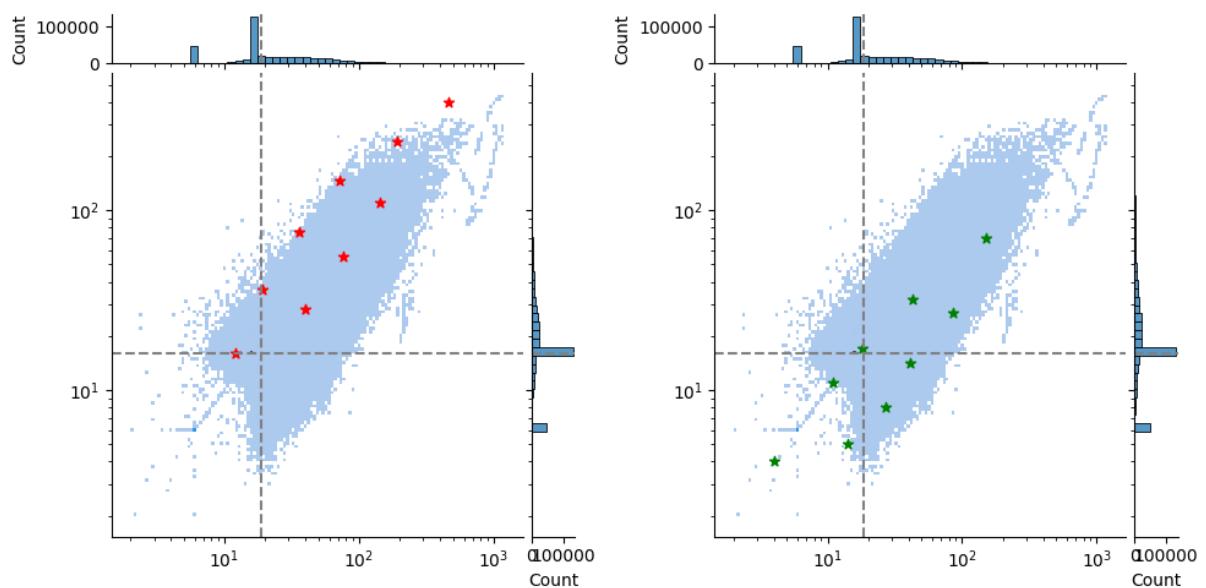


Figure 4.2: Anchor Distribution on Dataset. Left: Original Anchor. Right: Recalculated Anchors

Table 4.2: Mosaic Augmentation and Anchor Recalculation Performance

No	Model	mAP@50
0	YOLOv7-plain	0%
1	YOLOv7-M	0%
2	YOLOv7-AR	0%
3	<b>YOLOv7-MAR</b>	<b>11.2%</b>
	Improvement	<b>+11.2%</b>

those 8 anchors are responsible for only 25% of the dataset and leave the rest to 1 anchor. This is very inefficient. In contrast, the recalculated anchors have a more balanced distribution with anchors distributed across each quadrant.

## Performance

The performance of the three models, namely YOLOv7-M, YOLOv7-AR, and YOLOv7-MAR, was compared to that of the baseline model YOLOv7-plain. The results are presented in Table 4.2. It can be observed from the table that YOLOv7-plain alone was unable to detect any objects in the test set. However, after applying both mosaic augmentation and anchor recalculation, the model achieved a notable improvement with a score of 11.2% at mAP@50.

Since the model YOLOv7-MAR was the only model that was capable of detection in the test set, we henceforth establish this model as the baseline for further modification. Meaning, in the subsequent sections, any modifications mentioned should be presumed to be composed of mosaic augmentation and anchor recalculation, in addition to the respective modification that was applied, unless explicitly stated otherwise.

## 4.3 Replacing Localization Loss to EIoU


In this section, we experimented with *EIoU*. We replaced the original *CIoU* loss of YOLOv7 to pure *EIoU* and convexified version of *EIoU*. The convexication was done by modifying the *EIoU* loss from  $-EIoU$  to  $(1 - EIoU)^2$  for better gradient dynamics during training.

The performance of these modifications can be seen in Table 4.3

Surprisingly, although *EIoU* outperformed *CIoU* when applied to networks like Faster-RCNN+ResNet and RetinaNet as Peng and Yu (2021) claimed, it performed worse when applied to YOLOv7 with “Airborne Object Tracking Dataset” (2021). Even after convexication, *CIoU* still outperform *EIoU* by 6.28%.

Table 4.3: EIoU Localization Loss Performance

No	Modification	mAP@50
0	<b>YOLOv7-MAR +CIoU (original)</b>	<b>11.2%</b>
1	YOLOv7-MAR + EIoU	0%
2	YOLOv7-MAR + EIoU + Convexication	4.92%
	Improvement	<b>-6.28%</b>

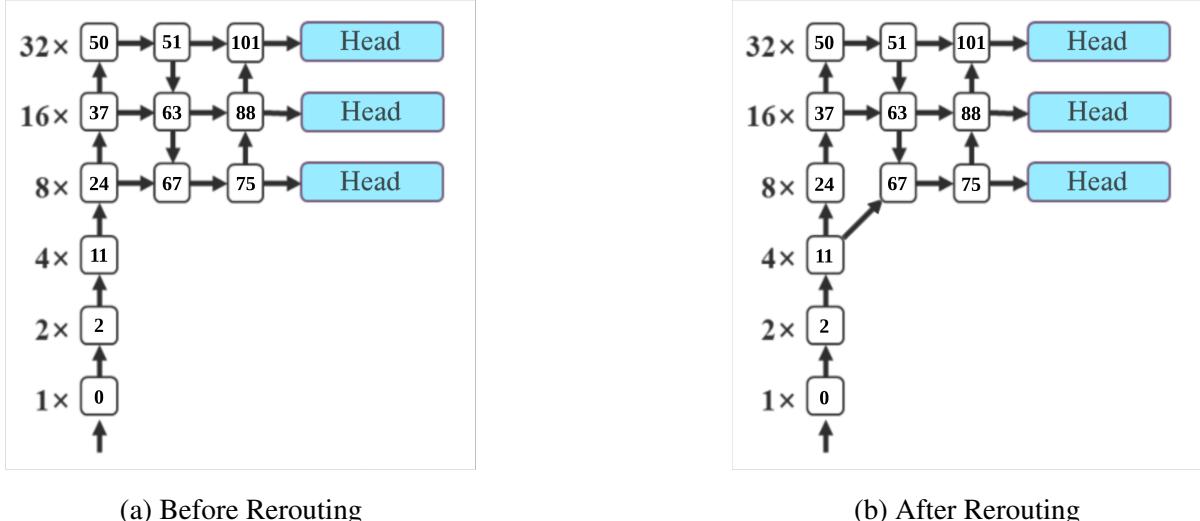

Adapted from: C.-Y. Wang, Bochkovskiy, et al. (2022) with permission (see Appendix C)

Figure 4.3: Modifying Connection to Earlier Feature Map Stage

Table 4.4: Performance of The Rerouted Model

No	Modification	mAP@50
0	YOLOv7-MAR	11.2%
1	<b>YOLOv7-MAR + rerouting</b>	<b>14.09%</b>
	Improvement	<b>+2.98%</b>

## 4.4 Utilizing Earlier Feature Map Stage

For this modification, we reconfigured the source of the feature map by redirecting it from P3 to P2, as shown in Figure 4.3. Specifically, we adjusted the routing on layer 66, changing it from 24 to 11. Since the output of layer 11 is at a different scale compared to 24 (with a scaling factor of  $2^{-2}$  and  $2^{-3}$  respectively), we modified the upsampling factor of layer 55 from 2 to 4 to ensure size compatibility with layer 11. However, this change in upsampling disrupted the subsequent layers. To solve this, we performed downsampling after layer 75 (connected to the head) by setting layer 77's stride to 2 and layer 79's stride to 4, resolving the size mismatch in the subsequent layers. The complete configuration of the layers can be seen in the appendix.

As presented in Table 4.4, rerouting the source of feature map to an earlier stage produce an improvement of 2.98% compared to YOLOv7-MAR.

## 4.5 Additional YOLO Detection Head

To add additional head layer, we utilized the feature map at the P2 scale of the network. We introduced an upsampling block after layer 75 and fused it with layer 11 at layer 79 by concatenation. To maintain the continuity of the network, we introduced a downsampling block that concludes at layer 87. The subsequent layers in the network retained their original structure, but with layer numbering shifted by 25 as seen on Figure 4.4.

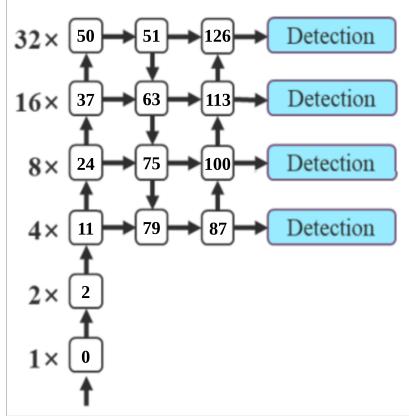


Figure 4.4: Model Architecture After Increasing The Head

Table 4.5: Additional Head Performance

No	Modification	mAP@50
0	YOLOv7-MAR	<b>11.2%</b>
1	YOLOv7-MAR + more head	5.19%
Improvement		<b>-6%</b>

As depicted in Table 4.5, additional head layer hurt the performance of the model. This is counterintuitive. We had seen P2 feature map capable of increasing the mAP in previous section. If we look at the loss at validation set, we can see that YOLO-MAR + head is minimizing the localization loss more than YOLO-MAR + rerouting. There are several reasons we thought of why this happened:

1. The network was simply producing loose bounding boxes prediction which looks better in loss function but fail when threshold criteria like in *mAP@50* is introduced.
2. This is an effect of bad choice of hyperparameters.

## 4.6 Decoupled Anchor-free Head

We experimented with replacing the coupled YOLO head to of a decoupled anchor-free head. Upon replacing the head, we also replaced the label assigner from SimOTA to TAL. The performance of this modification is shown in Table 4.6.

The model was initially unable to converge due to numerical instability caused by having the objects becoming too small upon downscaling. After stabilizing the loss function to handle these cases as shown in Appendix B, this modification was able to improve the mAP score by 21.78%.

## 4.7 Partitioning Image

We trained the models using partitioned image of the original dataset. In inference, we expect to partition an image into 4 equal sized images, which will then be fed to the neural

Table 4.6: Anchor-free Head Performance

No	Model	mAP@50
0	YOLOv7-MAR (anchor head)	11.2%
1	YOLOv7-MAR + anchor-free head	0%
1	<b>YOLOv7-MAR + anchor-free head</b> <small>*numerically stabilized</small>	<b>32.98%</b>
	Improvement	<b>+21.78%</b>



Figure 4.5: Example Image Source for Cropping



Figure 4.6: Cropping without Strategy (Random Center)

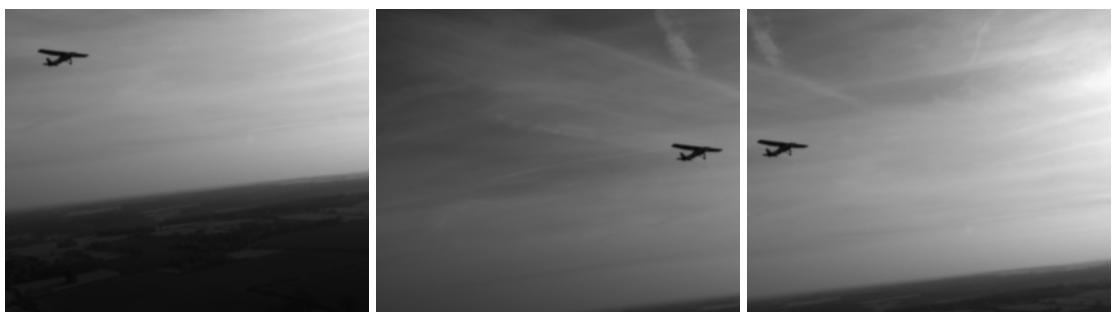


Figure 4.7: Cropping with Strategy

network. This way, the network will produce 4 independent output that we can combine to form the final inference.

To generate partitioned data for training, we cropped image with size of  $(W/2, H/2)$  based on the location of the objects bounding boxes. Therefore, it can be guaranteed that each image has at least an object except for negative class images. The procedure for this is described in the following:

- Open all images and their labels which consist of list of objects in it.
- For each object in an image, define a crop area with the following way:
  - First, define the width and height of crop as a vector  $\overrightarrow{crop_{wh}}$
  - Then, we wanted to find a lower bound and upper bound for the x and y value that the crop center can be placed such that it would not cut object bounding box and not out of the boundary of the image itself. For example, for cropping the image in Figure 4.5, we wanted to ensure the result would not be like in Figure 4.6. So, for the lower bound, we have:

$$\overrightarrow{crop_{lb}} = \max\left(\frac{\overrightarrow{c_{wh}}}{2} - \frac{\overrightarrow{crop_{wh}}}{2}, \frac{\overrightarrow{crop_{wh}}}{2} - \overrightarrow{c_{xy}}\right) \quad (4.2)$$

Where  $c_{wh}$  = the width and height of the object's bounding box

$c_{xy}$  = the center of the object's bounding box

$$\max(\vec{a}, \vec{b}) = \begin{pmatrix} \max(a.x, b.x) \\ \max(a.y, b.y) \end{pmatrix}$$

And for the upper bound:

$$\overrightarrow{crop_{ub}} = \max\left(\frac{\overrightarrow{c_{wh}}}{2} - \frac{\overrightarrow{c_{wh}}}{2}, 1 - \frac{\overrightarrow{crop_{wh}}}{2} - \overrightarrow{c_{xy}}\right) \quad (4.3)$$

- Finally, Equation 4.2 and 4.3 can be used to compute a randomized but constrained center point of the crop area by combining them to the following equation:

$$\overrightarrow{crop_{xy}} = \text{diag}(R)(\overrightarrow{crop_{ub}} - \overrightarrow{crop_{lb}}) + \overrightarrow{crop_{lb}} + \overrightarrow{c_{xy}} \quad (4.4)$$

Where  $R$  = a random vector with value of its element is within  $(0, 1)$

$\text{diag}(R)$  = a function that convert a vector  $R$  to a diagonal matrix with elements of  $R$  as its diagonal

- After the cropping area has been defined, the bounding boxes' values must also be con-

verted to the cropped perspective. These conversions were done like the following:

$$\hat{\vec{c}}_{xy} = \vec{c}_{xy} - (\vec{crop}_{xy} - \frac{\vec{crop}_{wh}}{2}) \quad (4.5)$$

$$\hat{\vec{c}}_{wh} = \frac{\vec{c}_{wh}}{\vec{crop}_{wh}} \quad (4.6)$$

Where the division operation in Equation 4.6 is an element-wise division, meaning the x component of the numerator is divided by the x component of the denominator, likewise for y component.

By following this procedure, it is ensured that the cropping for training image would be like in Figure 4.7 and not like Figure 4.6. Without using this strategy, the resulting partitioned image for training would have a significant increase in negative class that could reduce the neural network recall ability.

The procedure so far only consider for the case when the objects are about  $crop_{wh}$  away from each other. If the objects are within  $crop_{wh}$  from each other, we redefined the  $c_{xy}$  and  $c_{wh}$  to be the smallest box that bounds every object in the image. Redefinition is done in the following way:

Let  $B$  = set bounding boxes in an image

$$\begin{aligned} c_{tl}.x &= \min\{c_{tl}^*.x : \forall c^* \in B\} \\ c_{tl}.y &= \min\{c_{tl}^*.y : \forall c^* \in B\} \\ c_{br}.x &= \max\{c_{br}^*.x : \forall c^* \in B\} \\ c_{br}.y &= \max\{c_{br}^*.y : \forall c^* \in B\} \\ c_{xy} &= \frac{c_{br} + c_{tl}}{2} \end{aligned} \quad (4.7)$$

$$c_{wh} = c_{br} - c_{tl} \quad (4.8)$$

Since the image were partitioned to a smaller size, we were finally able to use a smaller input size for the neural network. We experimented by using 640 and 960 input size on some previous modifications. The performance is shown on Table 4.7. YOLOv7-MAR + anchor-free with input size 960 produced the greatest mAP@50 score amongst other model when partitioned to 4.

Table 4.7: Partitioning Image Performance

No	Model	Input Size	Partition4 mAP@50
0	YOLOv7-AR	960	2.9%
1	YOLOv7-MAR	640	18.46%
3	YOLOv7-MAR	960	37.69%
4	YOLOv7-MAR + rerouting	960	30.04%
5	YOLOv7-MAR + more head	960	10.53%
6	YOLOv7-M + anchor-free	640	37.57%
7	YOLOv7-M + anchor-free	960	<b>46.18%</b>

Table 4.8: Inference Speed of Modified Models

No	Model	Input Size	Inference Speed	
			YOLO Reparameterized	
0	YOLOv7-MAR, plain, M, AR, EIoU	1600	29.6 FPS	29.6 FPS
1	YOLOv7-MAR + rerouting	1600	23.28 FPS	23.02 FPS
2	YOLOv7-MAR + more head	1600	15.91 FPS	16.09 FPS
3	YOLOv7-MAR + anchor-free	1600	26.42 FPS	26.01 FPS
4	YOLOv7-MAR	Partition 4, 960	72.45 FPS	73.75 FPS
5	YOLOv7-MAR + rerouting	Partition 4, 960	60.35 FPS	61.64 FPS
6	YOLOv7-MAR + more head	Partition 4, 960	40.7 FPS	41.8 FPS
7	YOLOv7-M + anchor-free	Partition 4, 960	63.17 FPS	64.2 FPS
8	YOLOv7-MAR	Partition 4, 640	69.75 FPS	71.78 FPS
9	YOLOv7-MAR + rerouting	Partition 4, 640	68.61 FPS	72.73 FPS
10	YOLOv7-MAR + more head	Partition 4, 640	57.40 FPS	59.47 FPS
11	YOLOv7-M + anchor-free	Partition 4, 640	65.29 FPS	65.34 FPS

## 4.8 Latency

In this section, the latency of the modifications is presented. The data obtained using computer with specification presented in section 3.3. Table 4.8 shows that all the partition 4 models have  $> 40$  FPS inference speed. This means that they are able to perform at  $> 10$  FPS even without batching to detect a full image, making them all valid candidate for the best model.

*[This page intentionally left blank]*

# CHAPTER V

## CONCLUSION

### 5.1 Conclusion

Based on the experiments conducted in previous chapter, it can be observed that some modification can improve YOLOv7 ability on detecting airborne objects, while others have negligible or even negative effect. We found that:

- YOLOv7 was only able to perform detection on airborne objects after adding mosaic augmentation to the training data and recalculated its anchor to fit the data. This modification improved the mAP score from 0 to 11.2%.
- EIoU, even with its convexification technique, was not able to outperform YOLOv7's original CIoU. It produced only 4.92% in mAP score.
- Rerouting the detection to use an earlier stage of feature map can improve slightly improve the mAP.
- Additional head on YOLOv7 did not perform better than original 3 head.
- Replacing head to a decoupled anchor free head greatly improve the detection capability.
- Applying image partition to all model greatly improve their detection performance. The greatest performance after applying image partition came from anchor-free head modification which produced 46.18% mAP, a 13.2% improvement compared to without partition.

In conclusion, amongst the proposed modifications applied to YOLOv7, we found that applying image partition, and replacing head to a decoupled anchor free head performed the best on detecting airborne objects, while still able to perform inference in real-time.

*[This page intentionally left blank]*

## REFERENCES

- Aditya, N., Indaryo, A., Solang, D., Santiung, M., Atmaja, H., Azis, A., Januar, F., Javanica, F., Kautaman, G., Kazaksti, E., Nugraha, D., Permadani, R., Ramadhan, R., Ramadhan, R., Damayanti, Z., Valentia, M., Sundana, P., Shodiq, F., Waisnawa, R., ... Dikairono, R. (2022). Roboboat 2022: Technical design report Barunastra ITS roboboat team.
- Airborne object tracking challenge*. (2021). Retrieved September 1, 2022, from <https://www.aicrowd.com/challenges/airborne-object-tracking-challenge>
- Airborne object tracking dataset*. (2021). Retrieved September 1, 2022, from <https://registry.opendata.aws/airborne-object-tracking>
- Amazon. (2022). *Amazon prime air prepares for drone deliveries*. Retrieved September 1, 2022, from <https://www.aboutamazon.com/news/transportation/amazon-prime-air-prepares-for-drone-deliveries>
- Benjumea, A., Teeti, I., Cuzzolin, F., & Bradley, A. (2021). Yolo-z: Improving small object detection in yolov5 for autonomous vehicles.
- Bochkovskiy, A., Wang, C.-Y., & Liao, H.-Y. M. (2020). Yolov4: Optimal speed and accuracy of object detection.
- Ge, Z., Liu, S., Wang, F., Li, Z., & Sun, J. (2021). Yolox: Exceeding yolo series in 2021.
- Jocher, G. (2020). *by Ultralytics* (Version 7.0). <https://doi.org/10.5281/zenodo.3908559>
- Jocher, G., Chaurasia, A., Stoken, A., Borovec, J., NanoCode012, Kwon, Y., Michael, K., TaoXie, Fang, J., imyhxy, & et al. (2022). Ultralytics/yolov5: V7.0 - yolov5 sota realtime instance segmentation. <https://doi.org/10.5281/zenodo.7347926>
- Li, C., Li, L., Jiang, H., Weng, K., Geng, Y., Li, L., Ke, Z., Li, Q., Cheng, M., Nie, W., Li, Y., Zhang, B., Liang, Y., Zhou, L., Xu, X., Chu, X., Wei, X., & Wei, X. (2022). Yolov6: A single-stage object detection framework for industrial applications.
- Padilla, R., Passos, W. L., Dias, T. L. B., Netto, S. L., & da Silva, E. A. B. (2021). A comparative analysis of object detection metrics with a companion open-source toolkit. *Electronics*, 10(3). <https://doi.org/10.3390/electronics10030279>
- Peng, H., & Yu, S. (2021). A systematic iou-related method: Beyond simplified regression for better localization. *CoRR, abs/2112.01793*. <https://arxiv.org/abs/2112.01793>
- Redmon, J., & Farhadi, A. (2016). Yolo9000: Better, faster, stronger.
- Redmon, J., & Farhadi, A. (2018). Yolov3: An incremental improvement.
- Rezatofighi, H., Tsoi, N., Gwak, J., Sadeghian, A., Reid, I., & Savarese, S. (2019). Generalized intersection over union: A metric and a loss for bounding box regression.
- Wang, C.-Y., Bochkovskiy, A., & Liao, H.-Y. M. (2020). Scaled-YOLOv4: Scaling cross stage partial network.
- Wang, C.-Y., Bochkovskiy, A., & Liao, H.-Y. M. (2022). YOLOv7: Trainable bag-of-freebies sets new state-of-the-art for real-time object detectors.
- Wang, C.-Y., Liao, H.-Y. M., & Yeh, I.-H. (2022). Designing network design strategies through gradient path analysis.
- Wang, C.-Y., Liao, H.-Y. M., Yeh, I.-H., Wu, Y.-H., Chen, P.-Y., & Hsieh, J.-W. (2019). CspNet: A new backbone that can enhance learning capability of cnn.
- Wang, C.-Y., Yeh, I.-H., & Liao, H.-Y. M. (2021). You only learn one representation: Unified network for multiple tasks.

- Wang, P., Xiao, J., Kawaguchi, K., & Lichen, W. (2022). Automatic ceiling damage detection in large-span structures based on computer vision and deep learning. *Sustainability*, 14, 3275. <https://doi.org/10.3390/su14063275>
- Xiao, J. (2021). exYOLO: A small object detector based on YOLOv3 object detector. *Procedia Computer Science*, 188, 18–25. <https://doi.org/10.1016/j.procs.2021.05.048>
- Zhang, Z., Lu, X., Cao, G., Yang, Y., Jiao, L., & Liu, F. (2021). Vit-yolo:transformer-based yolo for object detection. *2021 IEEE/CVF International Conference on Computer Vision Workshops (ICCVW)*, 2799–2808. <https://doi.org/10.1109/ICCVW54120.2021.00314>
- Zheng, Z., Wang, P., Liu, W., Li, J., Ye, R., & Ren, D. (2019). Distance-iou loss: Faster and better learning for bounding box regression.
- Zhong, Y., Wang, J., Peng, J., & Zhang, L. (2018). Anchor box optimization for object detection.

## APPENDIX A

### YOLOv7 + more head Architecture Configuration

```
1 # parameters
2 nc: 4 # number of classes
3 depth_multiple: 1.0 # model depth multiple
4 width_multiple: 1.0 # layer channel multiple
5
6 # anchors
7 anchors:
8   # [12,16, 19,36, 40,28] # P3/8
9   # [36,75, 76,55, 72,146] # P4/16
10  # [142,110, 192,243, 459,401] # P5/32
11  - [4,4, 10,10, 23,8]
12  - [16,15, 41,11, 59,23]
13  - [46,34, 47,41, 85,29]
14  - [114,27, 112,62, 272,71]
15
16 # yolov7 backbone
17 backbone:
18   # [from, number, module, args]
19   [[-1, 1, Conv, [32, 3, 1]], # 0
20
21   [-1, 1, Conv, [64, 3, 2]], # 1-P1/2
22   [-1, 1, Conv, [64, 3, 1]],
23
24   [-1, 1, Conv, [128, 3, 2]], # 3-P2/4
25   [-1, 1, Conv, [64, 1, 1]],
26   [-2, 1, Conv, [64, 1, 1]],
27   [-1, 1, Conv, [64, 3, 1]],
28   [-1, 1, Conv, [64, 3, 1]],
29   [-1, 1, Conv, [64, 3, 1]],
30   [-1, 1, Conv, [64, 3, 1]],
31   [[-1, -3, -5, -6], 1, Concat, [1]],
32   [-1, 1, Conv, [256, 1, 1]], # 11
33
34   [-1, 1, MP, []],
35   [-1, 1, Conv, [128, 1, 1]],
36   [-3, 1, Conv, [128, 1, 1]],
37   [-1, 1, Conv, [128, 3, 2]],
38   [[-1, -3], 1, Concat, [1]], # 16-P3/8
39   [-1, 1, Conv, [128, 1, 1]],
40   [-2, 1, Conv, [128, 1, 1]],
41   [-1, 1, Conv, [128, 3, 1]],
42   [-1, 1, Conv, [128, 3, 1]],
43   [-1, 1, Conv, [128, 3, 1]],
44   [-1, 1, Conv, [128, 3, 1]],
45   [[-1, -3, -5, -6], 1, Concat, [1]],
46   [-1, 1, Conv, [512, 1, 1]], # 24
47
48   [-1, 1, MP, []],
49   [-1, 1, Conv, [256, 1, 1]],
```

```

50  [-3, 1, Conv, [256, 1, 1]],  

51  [-1, 1, Conv, [256, 3, 2]],  

52  [[-1, -3], 1, Concat, [1]], # 29-P4/16  

53  [-1, 1, Conv, [256, 1, 1]],  

54  [-2, 1, Conv, [256, 1, 1]],  

55  [-1, 1, Conv, [256, 3, 1]],  

56  [-1, 1, Conv, [256, 3, 1]],  

57  [-1, 1, Conv, [256, 3, 1]],  

58  [-1, 1, Conv, [256, 3, 1]],  

59  [[-1, -3, -5, -6], 1, Concat, [1]],  

60  [-1, 1, Conv, [1024, 1, 1]], # 37  

61  

62  [-1, 1, MP, []],  

63  [-1, 1, Conv, [512, 1, 1]],  

64  [-3, 1, Conv, [512, 1, 1]],  

65  [-1, 1, Conv, [512, 3, 2]],  

66  [[-1, -3], 1, Concat, [1]], # 42-P5/32  

67  [-1, 1, Conv, [256, 1, 1]],  

68  [-2, 1, Conv, [256, 1, 1]],  

69  [-1, 1, Conv, [256, 3, 1]],  

70  [-1, 1, Conv, [256, 3, 1]],  

71  [-1, 1, Conv, [256, 3, 1]],  

72  [-1, 1, Conv, [256, 3, 1]],  

73  [[-1, -3, -5, -6], 1, Concat, [1]],  

74  [-1, 1, Conv, [1024, 1, 1]], # 50  

75 ]  

76  

77 # yolov7 head  

78 head:  

79  [[-1, 1, SPPCSPC, [512]], # 51  

80  

81  [-1, 1, Conv, [256, 1, 1]],  

82  [-1, 1, nn.Upsample, [None, 2, 'nearest']],  

83  [37, 1, Conv, [256, 1, 1]], # route backbone P4  

84  [[-1, -2], 1, Concat, [1]],  

85  

86  [-1, 1, Conv, [256, 1, 1]],  

87  [-2, 1, Conv, [256, 1, 1]],  

88  [-1, 1, Conv, [128, 3, 1]],  

89  [-1, 1, Conv, [128, 3, 1]],  

90  [-1, 1, Conv, [128, 3, 1]],  

91  [-1, 1, Conv, [128, 3, 1]],  

92  [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],  

93  [-1, 1, Conv, [256, 1, 1]], # 63  

94  

95  [-1, 1, Conv, [128, 1, 1]],  

96  [-1, 1, nn.Upsample, [None, 2, 'nearest']],  

97  [24, 1, Conv, [128, 1, 1]], # route backbone P3  

98  [[-1, -2], 1, Concat, [1]],  

99  

100 [-1, 1, Conv, [128, 1, 1]],  

101 [-2, 1, Conv, [128, 1, 1]],  

102 [-1, 1, Conv, [64, 3, 1]],  

103 [-1, 1, Conv, [64, 3, 1]],  

104 [-1, 1, Conv, [64, 3, 1]],  

105 [-1, 1, Conv, [64, 3, 1]],  

106 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
```

```

107 [-1, 1, Conv, [128, 1, 1]], # 75
108 ##### RECALCULATE INDEX FROM HERE #####
109 [-1, 1, Conv, [64, 1, 1]],
110 [-1, 1, nn.Upsample, [None, 2, 'nearest']],
111 [11, 1, Conv, [64, 1, 1]], # route backbone P2
112 [[-1, -2], 1, Concat, [1]], # 79
113
114
115 [-1, 1, Conv, [64, 1, 1]],
116 [-2, 1, Conv, [64, 1, 1]],
117 [-1, 1, Conv, [32, 3, 1]],
118 [-1, 1, Conv, [32, 3, 1]],
119 [-1, 1, Conv, [32, 3, 1]],
120 [-1, 1, Conv, [32, 3, 1]],
121 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
122 [-1, 1, Conv, [64, 1, 1]], # 87 HEAD 1
123
124
125 [-1, 1, MP, []],
126 [-1, 1, Conv, [64, 1, 1]],
127 [-3, 1, Conv, [64, 1, 1]],
128 [-1, 1, Conv, [64, 3, 2]],
129 [[-1, -3, 75], 1, Concat, [1]], # 92
130
131
132 [-1, 1, Conv, [128, 1, 1]],
133 [-2, 1, Conv, [128, 1, 1]],
134 [-1, 1, Conv, [64, 3, 1]],
135 [-1, 1, Conv, [64, 3, 1]],
136 [-1, 1, Conv, [64, 3, 1]],
137 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
138 [-1, 1, Conv, [128, 1, 1]], # 100 HEAD 2
139
140
141 [-1, 1, MP, []],
142 [-1, 1, Conv, [128, 1, 1]],
143 [-3, 1, Conv, [128, 1, 1]],
144 [-1, 1, Conv, [128, 3, 2]],
145 [[-1, -3, 63], 1, Concat, [1]], #105
146
147 [-1, 1, Conv, [256, 1, 1]],
148 [-2, 1, Conv, [256, 1, 1]],
149 [-1, 1, Conv, [128, 3, 1]],
150 [-1, 1, Conv, [128, 3, 1]],
151 [-1, 1, Conv, [128, 3, 1]],
152 [-1, 1, Conv, [128, 3, 1]],
153 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
154 [-1, 1, Conv, [256, 1, 1]], # 113 HEAD 3
155
156 [-1, 1, MP, []],
157 [-1, 1, Conv, [256, 1, 1]],
158 [-3, 1, Conv, [256, 1, 1]],
159 [-1, 1, Conv, [256, 3, 2]],
160 [[-1, -3, 51], 1, Concat, [1]], # 118
161
162 [-1, 1, Conv, [512, 1, 1]],
163 [-2, 1, Conv, [512, 1, 1]],

```

```

164 [-1, 1, Conv, [256, 3, 1]],  

165 [-1, 1, Conv, [256, 3, 1]],  

166 [-1, 1, Conv, [256, 3, 1]],  

167 [-1, 1, Conv, [256, 3, 1]],  

168 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],  

169 [-1, 1, Conv, [512, 1, 1]], # 126 HEAD 4  

170  

171 #[75, 1, RepConv, [256, 3, 1]],  

172 #[88, 1, RepConv, [512, 3, 1]],  

173 #[101, 1, RepConv, [1024, 3, 1]],  

174  

175 [87, 1, RepConv, [128, 3, 1]], # 127  

176 [100, 1, RepConv, [256, 3, 1]],  

177 [113, 1, RepConv, [512, 3, 1]],  

178 [126, 1, RepConv, [1024, 3, 1]],  

179  

180  

181 [[127, 128, 129, 130], 1, IDetect, [nc, anchors]], # Detect(P3, P4, P5)  

182 ]

```

---

## YOLOv7 + rerouting Architecture Configuration

```

1 # parameters  

2 nc: 4 # number of classes  

3 depth_multiple: 1.0 # model depth multiple  

4 width_multiple: 1.0 # layer channel multiple  

5  

6 # anchors  

7 anchors:  

8   #- [12,16, 19,36, 40,28] # P3/8  

9   #- [36,75, 76,55, 72,146] # P4/16  

10  #- [142,110, 192,243, 459,401] # P5/32  

11  - [4,4, 14,5, 11,11] # P3/8  

12  - [27,8, 18,17, 41,14] # P4/16  

13  - [43,32, 86,27, 149,70] # P5/32  

14  

15 # yolov7 backbone  

16 backbone:  

17   # [from, number, module, args]  

18   [[-1, 1, Conv, [32, 3, 1]], # 0  

19  

20   [-1, 1, Conv, [64, 3, 2]], # 1-P1/2  

21   [-1, 1, Conv, [64, 3, 1]],  

22  

23   [-1, 1, Conv, [128, 3, 2]], # 3-P2/4  

24   [-1, 1, Conv, [64, 1, 1]],  

25   [-2, 1, Conv, [64, 1, 1]],  

26   [-1, 1, Conv, [64, 3, 1]],  

27   [-1, 1, Conv, [64, 3, 1]],  

28   [-1, 1, Conv, [64, 3, 1]],  

29   [-1, 1, Conv, [64, 3, 1]],  

30   [[-1, -3, -5, -6], 1, Concat, [1]],  

31   [-1, 1, Conv, [256, 1, 1]], # 11  

32  

33   [-1, 1, MP, []],  

34   [-1, 1, Conv, [128, 1, 1]],  


```

```

35     [-3, 1, Conv, [128, 1, 1]],
36     [-1, 1, Conv, [128, 3, 2]],
37     [[-1, -3], 1, Concat, [1]],  # 16-P3/8
38     [-1, 1, Conv, [128, 1, 1]],
39     [-2, 1, Conv, [128, 1, 1]],
40     [-1, 1, Conv, [128, 3, 1]],
41     [-1, 1, Conv, [128, 3, 1]],
42     [-1, 1, Conv, [128, 3, 1]],
43     [-1, 1, Conv, [128, 3, 1]],
44     [[-1, -3, -5, -6], 1, Concat, [1]],
45     [-1, 1, Conv, [512, 1, 1]],  # 24
46
47     [-1, 1, MP, []],
48     [-1, 1, Conv, [256, 1, 1]],
49     [-3, 1, Conv, [256, 1, 1]],
50     [-1, 1, Conv, [256, 3, 2]],
51     [[-1, -3], 1, Concat, [1]],  # 29-P4/16
52     [-1, 1, Conv, [256, 1, 1]],
53     [-2, 1, Conv, [256, 1, 1]],
54     [-1, 1, Conv, [256, 3, 1]],
55     [-1, 1, Conv, [256, 3, 1]],
56     [-1, 1, Conv, [256, 3, 1]],
57     [-1, 1, Conv, [256, 3, 1]],
58     [[-1, -3, -5, -6], 1, Concat, [1]],
59     [-1, 1, Conv, [1024, 1, 1]],  # 37
60
61     [-1, 1, MP, []],
62     [-1, 1, Conv, [512, 1, 1]],
63     [-3, 1, Conv, [512, 1, 1]],
64     [-1, 1, Conv, [512, 3, 2]],
65     [[-1, -3], 1, Concat, [1]],  # 42-P5/32
66     [-1, 1, Conv, [256, 1, 1]],
67     [-2, 1, Conv, [256, 1, 1]],
68     [-1, 1, Conv, [256, 3, 1]],
69     [-1, 1, Conv, [256, 3, 1]],
70     [-1, 1, Conv, [256, 3, 1]],
71     [-1, 1, Conv, [256, 3, 1]],
72     [[-1, -3, -5, -6], 1, Concat, [1]],
73     [-1, 1, Conv, [1024, 1, 1]],  # 50
74 ]
75
76 # yolov7 head
77 head:
78     [[-1, 1, SPPCSPC, [512]], # 51
79
80     [-1, 1, Conv, [256, 1, 1]],
81     [-1, 1, nn.Upsample, [None, 2, 'nearest']],
82     [37, 1, Conv, [256, 1, 1]], # route backbone P4
83     [[-1, -2], 1, Concat, [1]],
84
85     [-1, 1, Conv, [256, 1, 1]],
86     [-2, 1, Conv, [256, 1, 1]],
87     [-1, 1, Conv, [128, 3, 1]],
88     [-1, 1, Conv, [128, 3, 1]],
89     [-1, 1, Conv, [128, 3, 1]],
90     [-1, 1, Conv, [128, 3, 1]],
91     [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],

```

```

92 [-1, 1, Conv, [256, 1, 1]], # 63
93
94 [-1, 1, Conv, [128, 1, 1]],
95 [-1, 1, nn.Upsample, [None, 4, 'nearest']],
96 [11, 1, Conv, [128, 1, 1]], # route backbone P3
97 [[-1, -2], 1, Concat, [1]],
98
99 [-1, 1, Conv, [128, 1, 1]],
100 [-2, 1, Conv, [128, 1, 1]],
101 [-1, 1, Conv, [64, 3, 1]],
102 [-1, 1, Conv, [64, 3, 1]],
103 [-1, 1, Conv, [64, 3, 1]],
104 [-1, 1, Conv, [64, 3, 1]],
105 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
106 [-1, 1, Conv, [128, 1, 1]], # 75
107
108 # RECALCULATE FROM HERE
109 # downsample after use in 75
110 [-1, 1, MP, []],
111 [-1, 1, Conv, [128, 1, 2]],
112 [-3, 1, Conv, [128, 1, 1]],
113 [-1, 1, Conv, [128, 3, 4]],
114 [[-1, -3, 63], 1, Concat, [1]], # 80
115
116 [-1, 1, Conv, [256, 1, 1]],
117 [-2, 1, Conv, [256, 1, 1]],
118 [-1, 1, Conv, [128, 3, 1]],
119 [-1, 1, Conv, [128, 3, 1]],
120 [-1, 1, Conv, [128, 3, 1]],
121 [-1, 1, Conv, [128, 3, 1]],
122 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
123 [-1, 1, Conv, [256, 1, 1]], # 88
124
125 [-1, 1, MP, []],
126 [-1, 1, Conv, [256, 1, 1]],
127 [-3, 1, Conv, [256, 1, 1]],
128 [-1, 1, Conv, [256, 3, 2]],
129 [[-1, -3, 51], 1, Concat, [1]],
130
131 [-1, 1, Conv, [512, 1, 1]],
132 [-2, 1, Conv, [512, 1, 1]],
133 [-1, 1, Conv, [256, 3, 1]],
134 [-1, 1, Conv, [256, 3, 1]],
135 [-1, 1, Conv, [256, 3, 1]],
136 [-1, 1, Conv, [256, 3, 1]],
137 [[-1, -2, -3, -4, -5, -6], 1, Concat, [1]],
138 [-1, 1, Conv, [512, 1, 1]], # 101
139
140 [75, 1, RepConv, [256, 3, 1]],
141 [88, 1, RepConv, [512, 3, 1]],
142 [101, 1, RepConv, [1024, 3, 1]],
143
144 [[102, 103, 104], 1, IDetect, [nc, anchors]], # Detect(P3, P4, P5)
145 ]

```

## APPENDIX B

### Compute EIoU

```
1 def bbox_iou(box1, box2, x1y1x2y2=True, eps=1e-7):
2     # Returns the IoU of box1 to box2. box1 is 4, box2 is nx4
3     box2 = box2.T
4
5     # Get the coordinates of bounding boxes
6     if x1y1x2y2: # x1, y1, x2, y2 = box1
7         b1_x1, b1_y1, b1_x2, b1_y2 = box1[0], box1[1], box1[2], box1[3]
8         b2_x1, b2_y1, b2_x2, b2_y2 = box2[0], box2[1], box2[2], box2[3]
9     else: # transform from xywh to xyxy
10        b1_x1, b1_x2 = box1[0] - box1[2] / 2, box1[0] + box1[2] / 2
11        b1_y1, b1_y2 = box1[1] - box1[3] / 2, box1[1] + box1[3] / 2
12        b2_x1, b2_x2 = box2[0] - box2[2] / 2, box2[0] + box2[2] / 2
13        b2_y1, b2_y2 = box2[1] - box2[3] / 2, box2[1] + box2[3] / 2
14
15
16    w1, h1 = b1_x2 - b1_x1, b1_y2 - b1_y1 + eps
17    w2, h2 = b2_x2 - b2_x1, b2_y2 - b2_y1 + eps
18
19    x0 = torch.min(b1_x1, b2_x1) # topleftest of top left of the boxes
20    y0 = torch.min(b1_y1, b2_y1)
21    x1 = torch.max(b1_x1, b2_x1) # bottomrightest of toplefts
22    y1 = torch.max(b1_y1, b2_y1)
23    x2 = torch.min(b1_x2, b2_x2) # topleftest of bottomrights
24    y2 = torch.min(b1_y2, b2_y2)
25
26    xmin = torch.min(x1, x2)
27    ymin = torch.min(y1, y2)
28    xmax = torch.max(x1, x2)
29    ymax = torch.max(y1, y2)
30
31    inter = (x2-x0)*(y2-y0) + \
32            (xmin-x0)*(ymin-y0) - \
33            (x1-x0)*(ymax-y0) - \
34            (xmax-x0)*(y1-y0)
35
36    union = w1 * h1 + w2 * h2 - inter + eps
37    return inter/union # using this just for covexication
38    #return torch.min(inter/union, torch.Tensor([1.0]).cuda()) # use this ←
39    # return for EIoU without covexication
```

### EIoU Loss

```
1 class ComputeLossOTA_EIoU(ComputeLossOTA):
2     def __call__(self, p, targets, imgs): # predictions, targets, model
3         device = targets.device
4         lcls, lbox, lobj = torch.zeros(1, device=device), torch.zeros(1, ←
5             device=device), torch.zeros(1, device=device)
```

```

5      bs, as_, gjs, gis, targets, anchors = self.build_targets(p, ←
6          targets, imgs)
7      pre_gen_gains = [torch.tensor(pp.shape, device=device)[[3, 2, 3, ←
8          2]] for pp in p]
9
10
11     # Losses
12     for i, pi in enumerate(p): # layer index, layer predictions
13         b, a, gj, gi = bs[i], as_[i], gjs[i], gis[i] # image, anchor←
14             , gridy, gridx
15         tobj = torch.zeros_like(pi[..., 0], device=device) # target ←
16             obj
17
18         n = b.shape[0] # number of targets
19         if n:
20             ps = pi[b, a, gj, gi] # prediction subset corresponding ←
21                 to targets
22
23             # Regression
24             grid = torch.stack([gi, gj], dim=1)
25             pxy = ps[:, :2].sigmoid() * 2. - 0.5
26             #pxy = ps[:, :2].sigmoid() * 3. - 1.
27             pwh = (ps[:, 2:4].sigmoid() * 2) ** 2 * anchors[i]
28             pbox = torch.cat((pxy, pwh), 1) # predicted box
29             selected_tbox = targets[i][:, 2:6] * pre_gen_gains[i]
30             selected_tbox[:, :2] -= grid
31             iou = bbox_iou(pbox.T, selected_tbox, x1y1x2y2=False, ←
32                 EIoU=True) # iou(prediction, target)
33             lbox += ((1.0 - iou)**2).mean() # iou loss # using ←
34                 square for covexication
35
36             # Objectness
37             tobj[b, a, gj, gi] = (1.0 - self.gr) + self.gr * iou.←
38                 detach().clamp(0).type(tobj.dtype) # iou ratio
39
40             # Classification
41             selected_tcls = targets[i][:, 1].long()
42             if self.nc > 1: # cls loss (only if multiple classes)
43                 t = torch.full_like(ps[:, 5:], self.cn, device=device.←
44                     ) # targets
45                 t[range(n), selected_tcls] = self.cp
46                 lcls += self.BCEcls(ps[:, 5:], t) # BCE
47
48             # Append targets to text file
49             # with open('targets.txt', 'a') as file:
50                 # [file.write('%11.5g ' * 4 % tuple(x) + '\n') for x ←
51                     in torch.cat((txy[i], twh[i]), 1)]
52
53             obji = self.BCEobj(pi[..., 4], tobj)
54             lobj += obji * self.balance[i] # obj loss
55             if self.autobalance:
56                 self.balance[i] = self.balance[i] * 0.9999 + 0.0001 / ←
57                     obji.detach().item()
58
59             if self.autobalance:
60                 self.balance = [x / self.balance[self.ssi] for x in self.←
61                     balance]

```

```

50     lbox *= self.hyp['box']
51     lobj *= self.hyp['obj']
52     lcls *= self.hyp['cls']
53     bs = tobj.shape[0]  # batch size
54
55     loss = lbox + lobj + lcls
56     return loss * bs, torch.cat((lbox, lobj, lcls, loss)).detach()

```

---

## Anchor-free Loss Numerical Stabilization

```

1  class ComputeLossStabilized(ComputeLoss):
2      def __call__(self, p, targets, img=None, epoch=0):
3          loss = torch.zeros(3, device=self.device)  # box, cls, dfl
4          feats, pred_distri, pred_scores = p
5          pred_scores = pred_scores.permute(0, 2, 1).contiguous()
6          pred_distri = pred_distri.permute(0, 2, 1).contiguous()
7
8          dtype = pred_scores.dtype
9          batch_size, grid_size = pred_scores.shape[:2]
10         imgs = torch.tensor(feats[0].shape[2:], device=self.device, ←
11             dtype=dtype) * self.stride[0]  # image size (h,w)
12         anchor_points, stride_tensor = make_anchors(feats, self.stride, ←
13             0.5)
14
15         # targets
16         targets = self.preprocess(targets, batch_size, scale_tensor=imgs←
17             [[1, 0, 1, 0]])
18         gt_labels, gt_bboxes = targets.split((1, 4), 2)  # cls, xyxy
19         mask_gt = gt_bboxes.sum(2, keepdim=True).gt_(0)
20
21         # pboxes
22         pred_bboxes = self.bbox_decode(anchor_points, pred_distri)  # ←
23             xyxy, (b, h*w, 4)
24
25         target_labels, target_bboxes, target_scores, fg_mask = self.←
26             assigner(
27                 pred_scores.detach().sigmoid(),
28                 (pred_bboxes.detach() * stride_tensor).type(gt_bboxes.dtype),
29                 anchor_points * stride_tensor,
30                 gt_labels,
31                 gt_bboxes,
32                 mask_gt)
33
34         target_bboxes /= stride_tensor
35         target_scores_sum = target_scores.sum()
36         target_scores_sum = max(1, target_scores_sum) # numerical ←
37             stabilization
38
39         # cls loss
40         # loss[1] = self.varifocal_loss(pred_scores, target_scores, ←
41             # target_labels) / target_scores_sum # VFL way
42         loss[1] = self.BCEcls(pred_scores, target_scores.to(dtype)).sum()←
43             / (target_scores_sum) # BCE
44
45         # bbox loss
46         if fg_mask.sum():
47             loss[0], loss[2], iou = self.bbox_loss(pred_distri,

```

```
39                                         pred_bboxes,
40                                         anchor_points,
41                                         target_bboxes,
42                                         target_scores,
43                                         target_scores_sum,
44                                         fg_mask)
45
46     loss[0] *= 7.5 # box gain
47     loss[1] *= 0.5 # cls gain
48     loss[2] *= 1.5 # dfl gain
49
50     return loss.sum() * batch_size, loss.detach() # loss(box, cls, ←
      dfl)
```

---

## APPENDIX C

Request for Permission to Reproduce Figure in a Final Project Report

DS Dion Andreas Solang To: liao@iis.sinica.edu.tw Fri 30/06/2023 08:00

Dear Dr. Liao,

I hope this email finds you well. My name is Dion Andreas Solang, and I am an undergraduate student at Institut Teknologi Sepuluh Nopember, Indonesia. I am writing to request for permission to include figures from your work in "YOLOv7: Trainable bag-of-freebies sets new state-of-the-art for real-time object detectors" and "Designing Network Design Strategies Through Gradient Path Analysis", in a final project report I am preparing for my course.

The figures I'm referring to are Fig. 1 and Fig. 5 of the YOLOv7 paper and Fig. 6 of the ELAN paper. I assure you that proper citation and acknowledgement will be given to your work, as per standard academic practice. I will include a caption beneath the figures indicating the source of the figures as well as the necessary citation information, ensuring that your work is appropriately credited.

I kindly ask for your permission to reproduce these figures in my report. If there are any conditions or requirements for the use of the figures, please let me know. Thank you for considering this request.

Sincerely,

Dion

廖弘源 <liao@iis.sinica.edu.tw> To: Dion Andreas Solang Cc: kinyiu <kinyiu@iis.sinica.edu.tw>; liao <liao@iis.sinica.edu.tw> Fri 30/06/2023 14:07

Dion,

Ok. No problem.

Best,  
Mark

...

Reply Reply all Forward

Permission for figures in C.-Y. Wang, Bochkovskiy, et al. (2022) and C.-Y. Wang, Liao, and Yeh (2022). Used in Figure 1.2, 2.7a, 2.8, and 4.3a

Request for Permission to Reproduce Figure in a Final Project Report

DS Dion Andreas Solang  
To: fabio.cuzzolin@brookes.ac.uk

Fri 30/06/2023 14:47

Dear Professor Cuzzolin,

I hope this email finds you well. My name is Dion Andreas Solang, and I am an undergraduate student at Institut Teknologi Sepuluh Nopember, Indonesia. I am writing to request for permission to include figures from your work in "YOLO-Z: Improving small object detection in YOLOv5 for autonomous vehicles" in a final project report I am preparing for my course.

The figures I'm referring to are Fig. 7 and Fig. 8 of the YOLO-Z paper. I assure you that proper citation and acknowledgement will be given to your work, as per standard academic practice. I will include a caption beneath the figures indicating the source of the figures as well as the necessary citation information, ensuring that your work is appropriately credited.

I kindly ask for your permission to reproduce these figures in my report. If there are any conditions or requirements for the use of the figures, please let me know. Thank you for considering this request.

Sincerely,

Dion

FC Fabio Cuzzolin <fabio.cuzzolin@brookes.ac.uk>  
To: Dion Andreas Solang

Fri 30/06/2023 15:52

Dear Dion,

absolutely no problem, and thanks for your interest in our work!

Fabio

...

Permission for figures in Benjumea et al. (2021). Used in Figure 2.12.

## AUTHOR'S BIOGRAPHY



Dion Andreas Solang, born on the day he was born, was a creature with many interests. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

*[This page intentionally left blank]*