

BALL VALVE

ASEKO 19, 1-PIECE INSIDE THREADS, REDUCED BORE


01DE-19R


Ordening example: PADE1005AC

Parts and Materials

No	Part	Material
1	Body	ASTM A351 GR. CF8M
2	Mounting ring	ASTM A276 TYPE 316
3	Full ball	ASTM A351 GR. CF8M
4	Ball seat	PTFE
5	Body seal	PTFE
6	Stem	ASTM A276 TYPE 316
7	Handle nut	SS304
8	Washer	SS304
9	Handle cover	Vinyl
10	Handle	SS304
11	Washer	SS304
12	Stem packing	PTFE
13	Gasket ring	PTFE
14	Locking device (option)	SS304

Pressure / Temperature



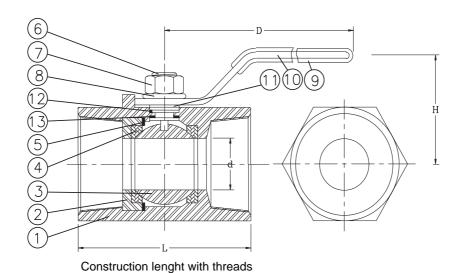

Dimensions and Weights

R	Ordering code	d	L	D	Н	Weight (kg)
1/4"	PADE1005AC	5	40	67	33	0,07
3/8"	PADE1010AC	7	45	67	36	0,11
1/2"	PADE1015AC	9.2	58	90	42	0,18
3/4"	PADE1020AC	12.5	60	90	45	0,27
1"	PADE1025AC	16	72	112	52	0,43
1-1/4"	PADE1030AC	20	80	112	57	0,7
1-1/2"	PADE1035AC	24.5	85	132	60	0,85
2"	PADE1040AC	32	102	132	65	1,4

Aseko Oy, Tinankuja 3, 02430 Masala Tel.(0)10 400 1012 Fax (0)10 400 1200 markkinointi@aseko.fi www.aseko.fi